

Lightsource Test Report

Product Infomation


Product Category: SLL004-A
 Product Number: 11

Product Spec: 40W 3000K

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3778$ $y=0.3799$ $u(u')=0.2221$ $v=0.3351$ $v'=0.5026$
 CCT: $T_c=3095K$ ($duv=0.00226$) Color Ratio: $R=0.179$ $G=0.785$ $B=0.036$
 Peak Wavelength: 450.1nm Half Bandwidth: 20.0nm
 Dominant Wavelength: 577.5nm Color Purity: 0.274
 CRI: Ra: Ra= 83.2

R1 =81	R2 =89	R3 =95	R4 =83	R5 =81	R6 =85	R7 =86	R8 =65
R9 =8	R10=74	R11=82	R12=60	R13=83	R14=97	R15=75	
Color Quality Scale: $Q_a= 83.3$, $Q_f= 83.6$, $Q_p= 82.8$, $Q_g= 92.2$							
Q1 =82	Q2 =98	Q3 =80	Q4 =77	Q5 =82	Q6 =84	Q7 =86	Q8 =90
Q9 =98	Q10=90	Q11=87	Q12=85	Q13=85	Q14=73	Q15=76	

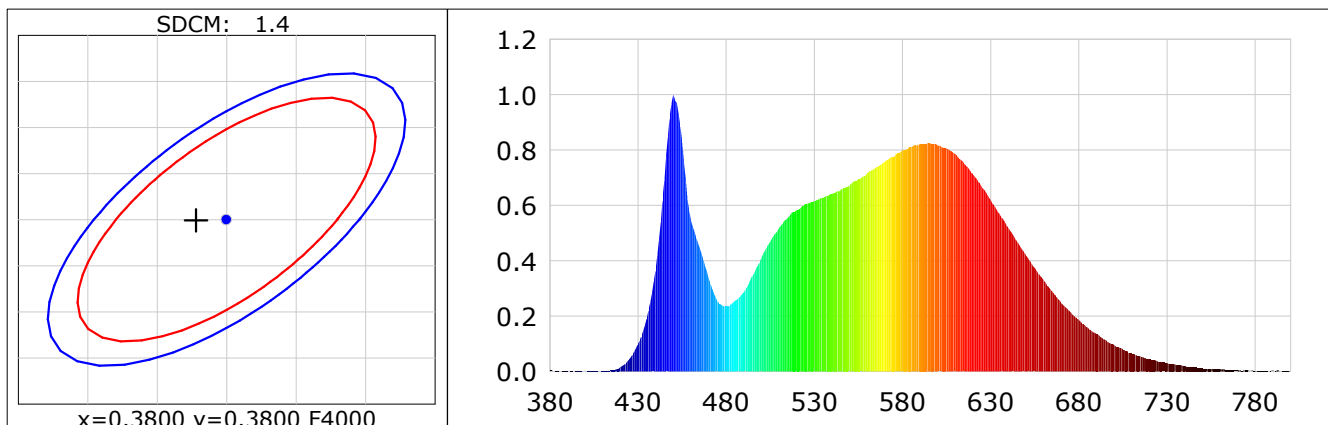

Photometric Parameters

Luminous Flux: 2990.95 lm Efficiency: 105.33 lm/W Radiant Power: 12.775 W
 EEI: 0.13 Energy Efficiency Class: A+ (EU 874-2012)

Electric Parameters

Voltage: 219.60V Current: 0.1890A Power: 40.54W
 Power Factor: 0.9780 Frequency: 50.00Hz

BIN: OUT :

Test Infomation

Scan Range: 380~800:1nm
 Stabilization Time: 0 Sec
 Max of Signal: 45924 (3130)

Photometric Method: sphere-spectroradiometer
 Photometric Condition: Sphere diameter: 2.00m, 4π
 CCD Integration Time: 392.63 ms

Condition: Tx:24.0'C, Ti:22.4'C, R.H.:60%
 Test Lab: IDEUS
 Operator:

Test Device: Inventfine CMS-3000S
 Test Time: 2019-12-10 12:00:57
 Inspector: