

silux

LIGHT THE FASHION

light the fashion

GUANGDONG SILUX OFFICE LIGHTING CO., LTD

6th Floor, No.82, Bai'An South Road, Cangmen Community,
Jun'An Town, Shunde District, Foshan City, Guangdong,
China.

TEL: (+86)757-2551 8989
FAX: (+86)757-2538 8873
info@siluxlight.com
www.siluxlight.com



silux


ABOUT US



Silux Lighting Co., Ltd was established in Foshan City, China, a professional LED indoor luminaries manufacturer, with strong R&D, service and design team and 10 years lighting production experience.


Silux provide full range indoor lighting solutions to global customers, including track light, spot light, down lights, linear light, trunking system, etc. We have strong design team, professional in Shape design, Moulding, Driver, Software, Optic, Dialux simulation, We have more than 20 national invention patents and utility patents.

Silux hold an production area of 8000m², up to 100 workers to support fast delivery to market. We have been providing the most comprehensive and excellent lighting solutions to more than 30 countries overseas, enjoying high reputation aboard.

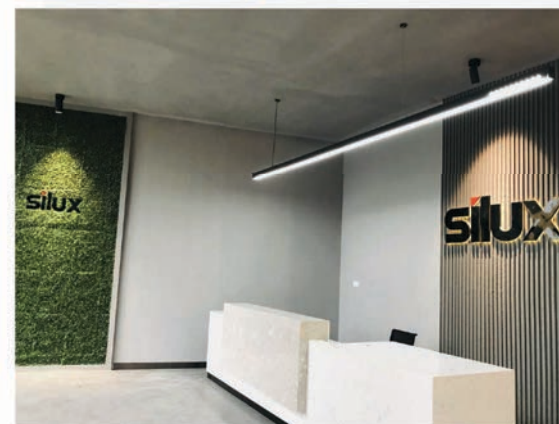

silux

R&D

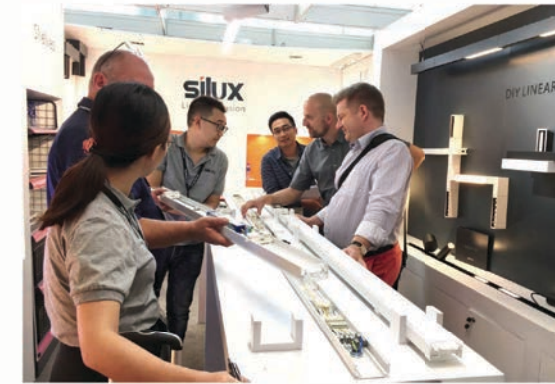

Silux can provide customized Service with our professional R&D team. Our OEM & ODM service can quick feedback project requirement and provide appropriate solution on different cases. We combine diversified skills and find the perfect balance between function, aesthetics and environment, to provide one-stop customize service only for you!

PRODUCTION




Our production processes utilize a mixture of advanced CAD and robotic machines together with highly skilled operators. A variety of automated punching presses and fabrication machines ensure our production processes are both efficient and accurate. After forming has been completed, luminaries bodies flow into our paint plant to apply the finishes which will protect them from the harsh environments they will operate in. The remaining stage of the cycles products moving into our assembly areas for final finishing and testing, prior to despatch to our customers

Design



The design culture of Silux lighting consists of two departments, one is a product design and the other is Dialux plan design. Good product design include structure design, heat control, optic design in every details. Silux also have a planing team to provide plan design service and simulation service to project customer.

Quality

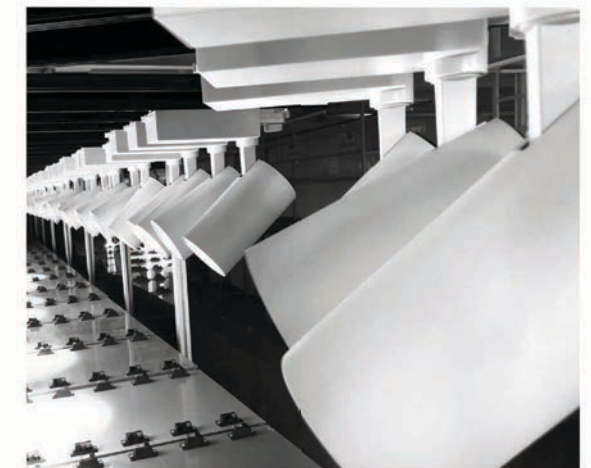

Quality has been one of the pillars our company rests on ever since. This is how it is transmitted into our products.

High quality happens in every detail aspects. Quality Light deliver the color precision, output, and beam angle which different application demands. Each surface, radius, and screw have to be delivered in such a way that the purpose and lifespan of the luminaries exceeds expectations.

APPLICATION


Gallery



Residential



Hospitality

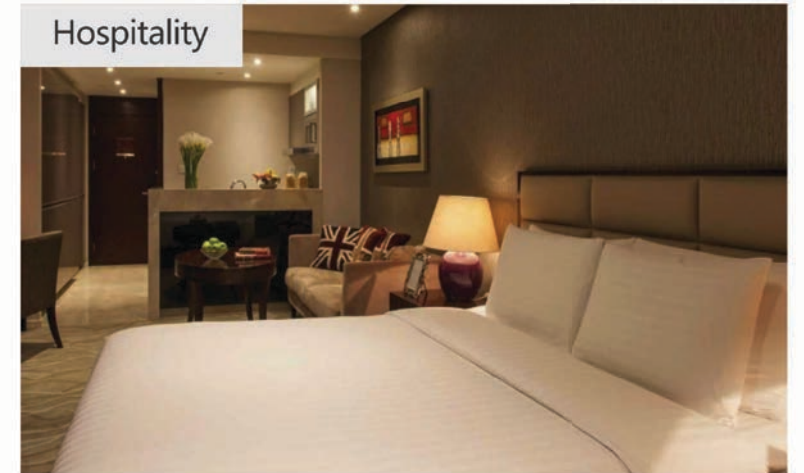


Museum





Fashion shop

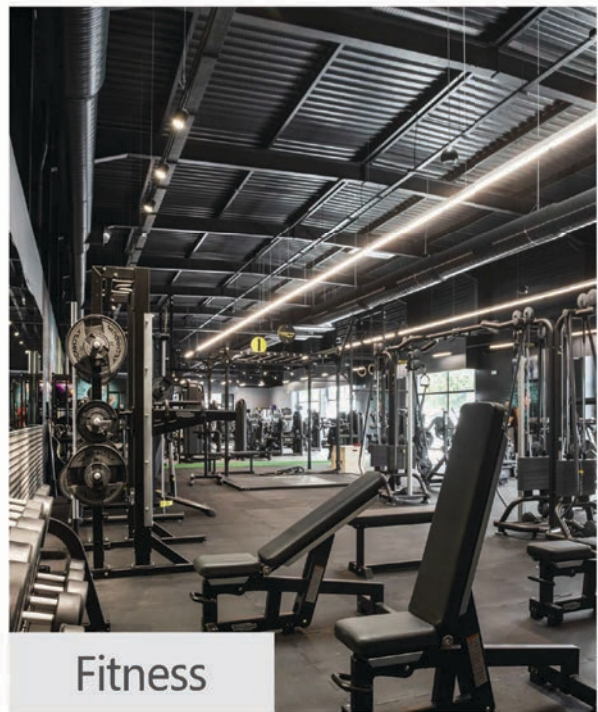


Fitness



School



Retail

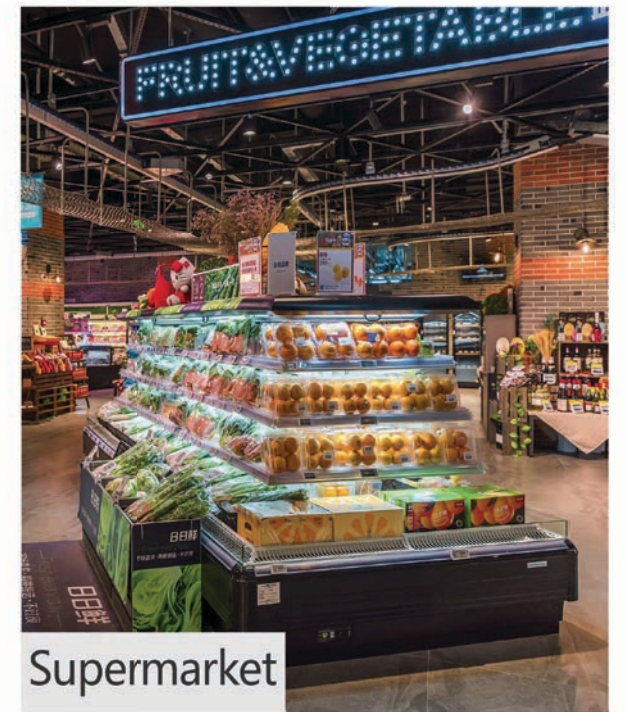

Supermarket



CASAMBI



ON/OFF



White Tuning



Dimming



Groups



Scenes



Schedules



Random & Vacation



Sunrise & Sunset



BLUETOOTH DIMMING CCT CHANGING

LIGHTING
Advanced LED fixtures

CONNECTIVITY
Bluetooth® technology

CONTROL
Mobile application and more

Smart lighting is the new standard.
A flexible new approach to smart lighting. Our system offers a range of Bluetooth fixtures, controls and accessories that work seamlessly together. From a single light to an entire home, your smart lighting search starts and ends here.

20W/30W/40W

2700K 3000K 3500K 4000K 5000K

2.4G CCT Changing

Feature

- 1 High efficiency, up to 90%, low THD<7.
- 2 Flick-Free and smooth dimming at any brightness.
- 3 2.4G Control technology to support large lights and areas control.





DALI Control system

Strategic driver partners: TCI, Tridonic, Boke, Euchips...
Strategic adapter partners: Global, PowerGear, Eutrac...



DALI Three Phases Track

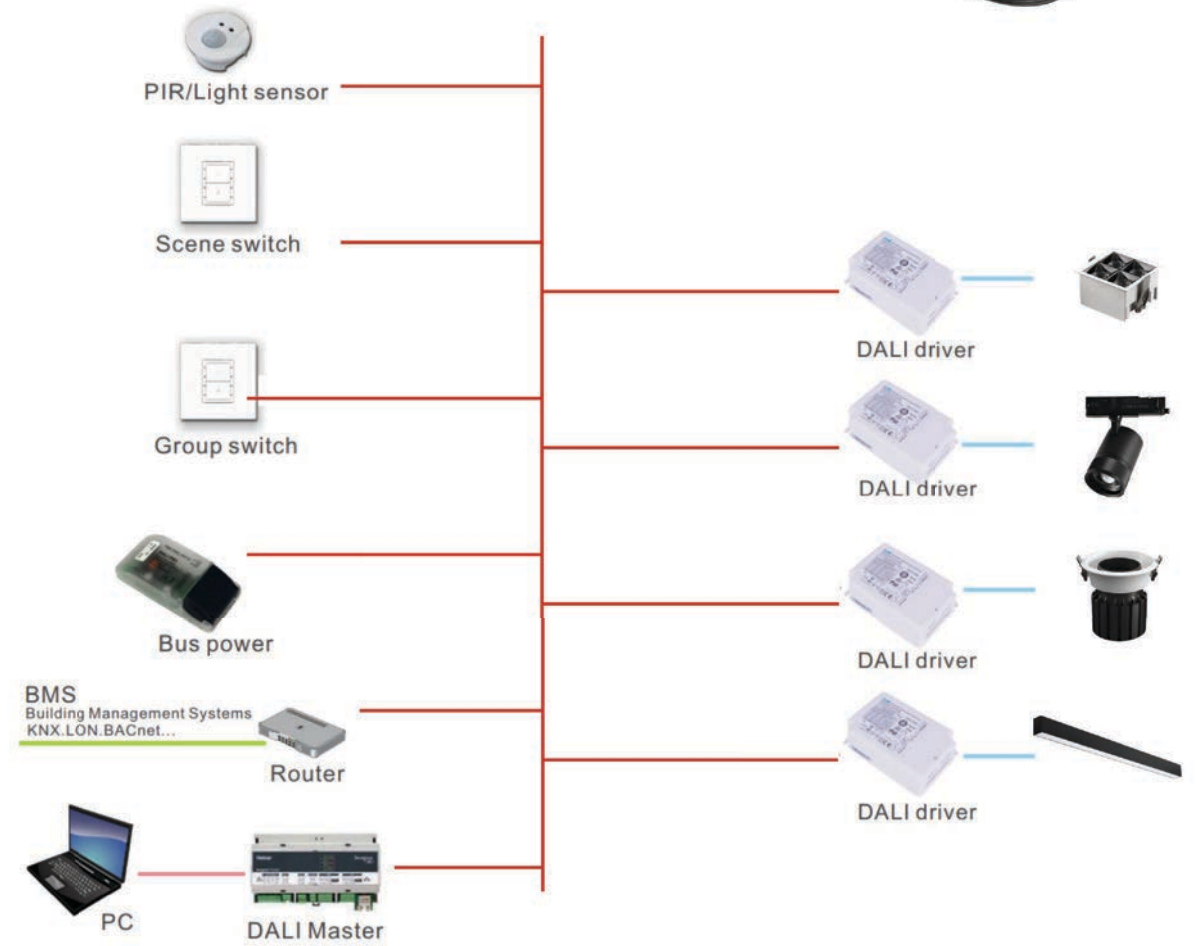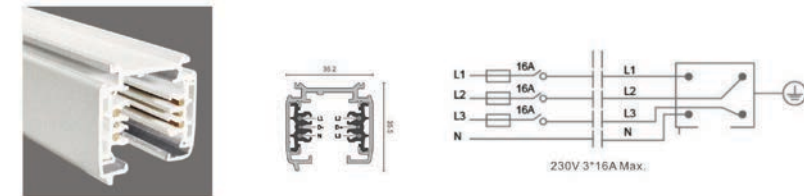

CCT:



2700K
Warm Environment, special Kids and Lady



3000K
Fashion Color, Lady and Gentleman Suit



3500K
Comfortable Color, Casual and Kids



4000K
Neutral color, Sport and Casual



5000K
Bright Color, Wedding and Underwear

Supermarket fresh solution.



Class A 3000K



Meat 1750K



Class A 3500K



Food 2500K

Fashion shop solution



ULTRA
Special light for red and yellow colors, apply to bright red garment



CLASS A
Restore all the colors more vivid, apply to garment with variant colors



SHOWCASE
More close to CDM light, apply to suit, pure color lady garment

Thrive: Human Centric Light Spectrum

Benefits

Full, consistent light spectrum with fewer spectral spikes, the closest match to natural light available

Typical 97 CRI with R1-R15 values ranging from 91 to 99 Excellent TM-30 metrics;

Rf ranging from 94-97 and Rg from 98-104

Up to 132 lm/W enabling greater energy savings, lower utility and environment costs

Accelerate adoption of full spectrum natural lighting

Enables design flexibility and product color consistency


CCT	R _f	R _g	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
2700K	95	103	97	99	94	94	97	98	97	98	99	97	91	98	98	95	98
3000K	95	104	98	99	93	94	97	98	96	96	97	96	92	95	98	95	97
3500K	95	98	98	98	97	98	98	98	98	97	93	97	97	95	98	97	98
4000K	97	100	99	99	97	99	99	99	99	98	94	97	99	96	99	98	98
5000K	97	100	98	99	98	98	98	98	99	96	95	98	98	98	98	98	97
5700K	94	98	98	98	97	95	98	97	96	95	92	97	96	96	98	98	97
6500K	95	98	98	98	97	96	98	98	96	96	93	97	96	97	98	98	97

Note: Typical 85C hot values shown for V10 Array products, slight differences may exist for other product configurations


Spectral Matching to Natural Light

Thrive Design Goal: Maintain as close of a spectral match as possible to natural light

- Standard LED light sources have large deviations from the Black Body Curve
- Bridgelux Thrive significantly reduces the blue spike and cyan valley to deliver a closer match to natural light

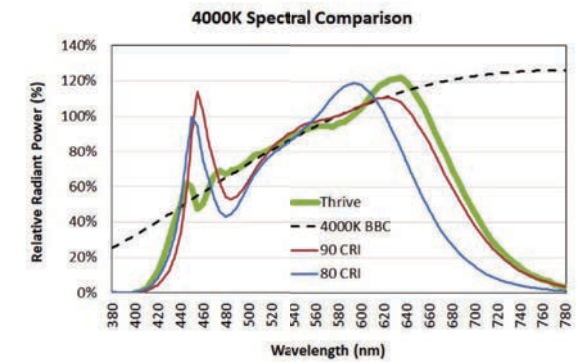

Residential - kitchen, living room, study, bathroom
 Commercial - retail stores, office, showrooms, museums
 Education - classrooms, libraries, cafeterias, laboratories
 Medical & Hospice - hospital, healthcare and long-term elderly care

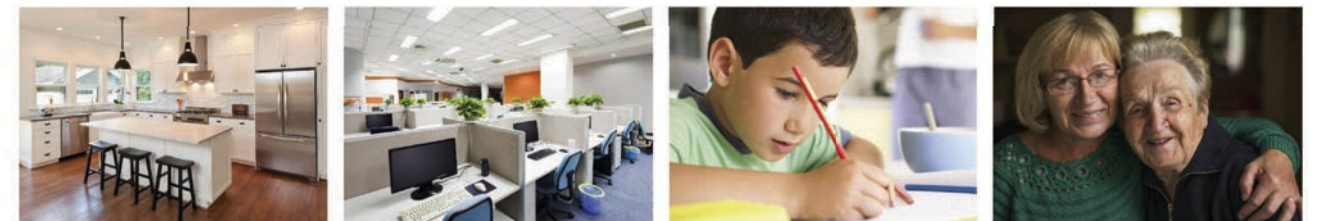



Light the Fashion



MERCURY

P001-010



TLS

TLSA

TLSC

VENUS

P011-018



TLA1

TLA2

TLA3

MARS

P019-024



TLD

TLDC

JUPITER

P025-030



TLE

TLI

NCTL 4

SATURN

P031-038



TLJ

NCH4

NCH3

URANUS

P039-044



ENFT

TLCB

SLDB

NEPTUNE

P045-048




TLKB

TLKC

silux

MERCURY

Functional mix design, TLS track light,
different optic accessories for different application

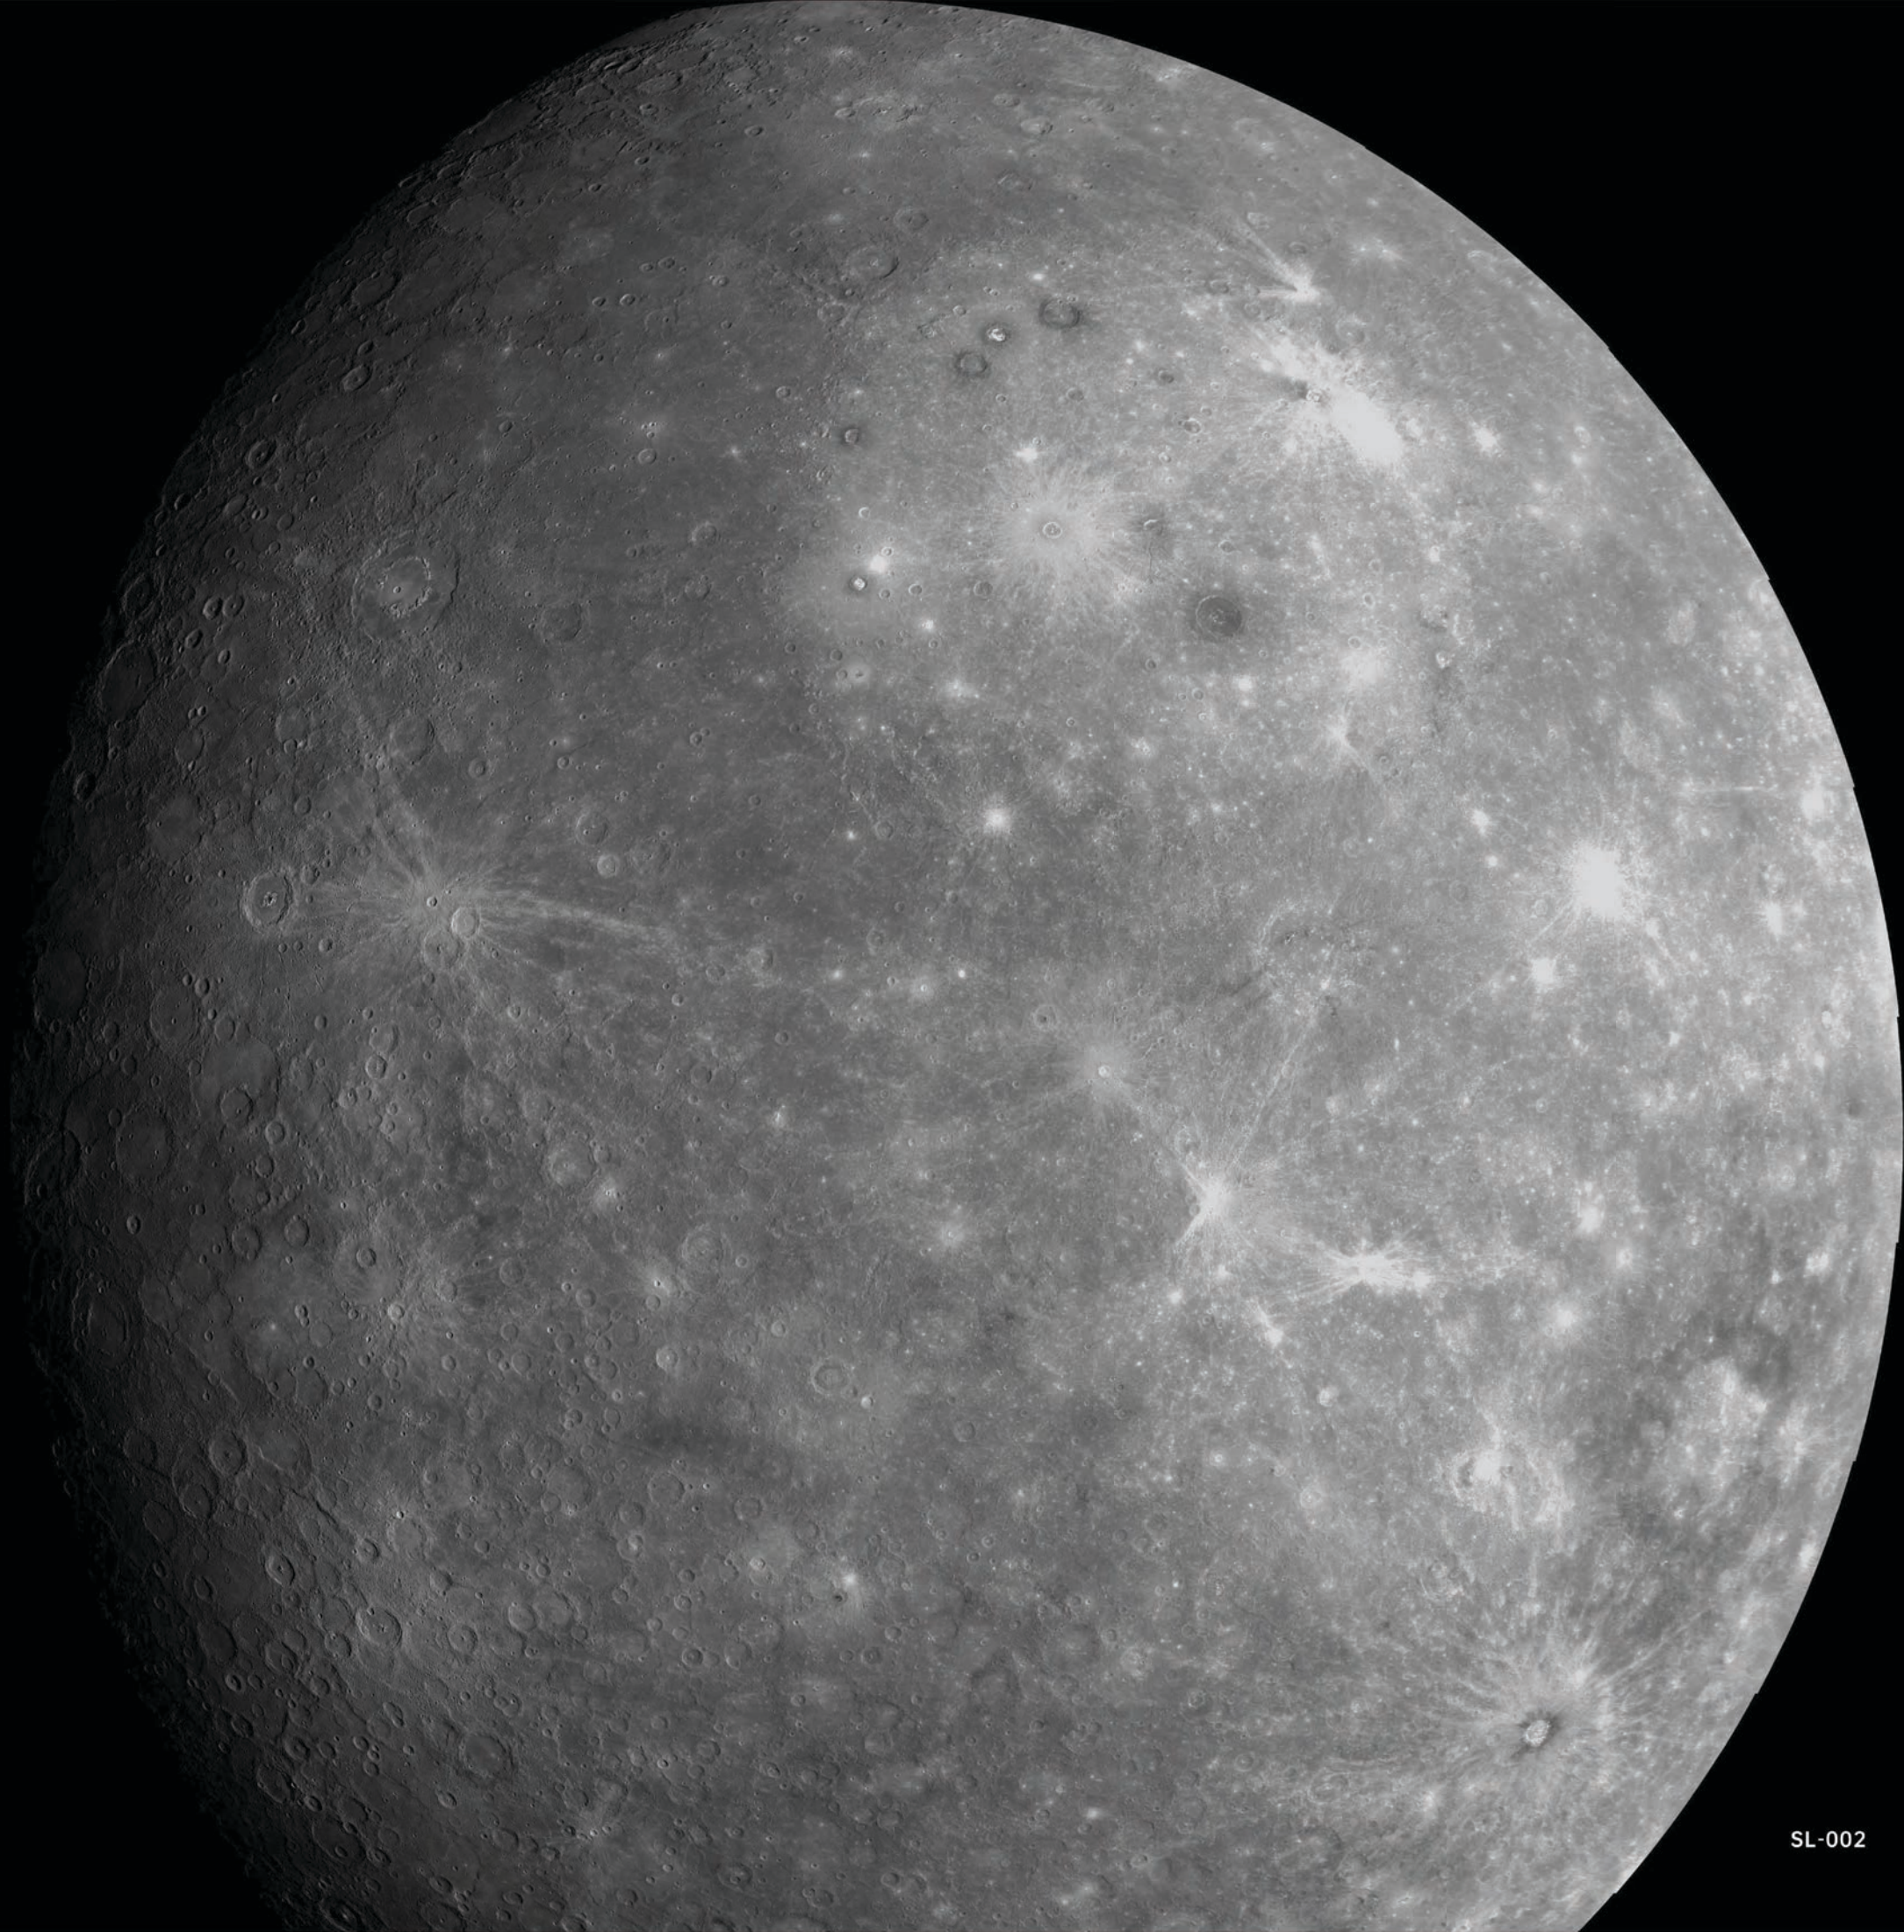




TLS

Product code	TLS030
Power (W)	30W
Lumen (Lm)	2200-2500
Size (mm)	Ø94xH142
Voltage	220-240V / 100-277V
PF	>0.9
CRI	83 / 90 / 95 / Thrive
Color	Black / White / Customized


Strategic partners



Light distribution curve

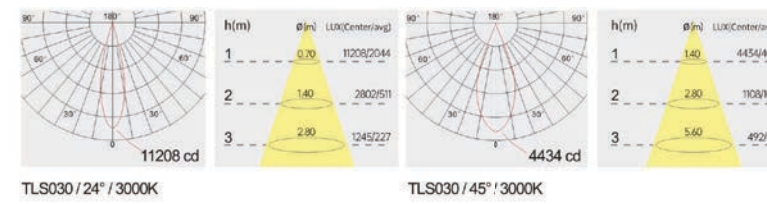


CCT

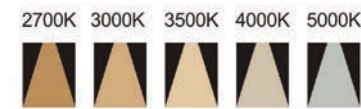


Dip Switch


Optical fittings

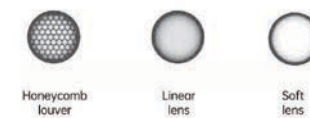

Product close-up

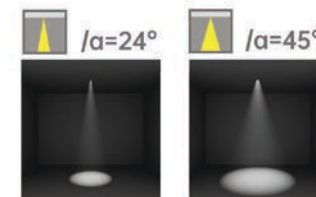

Zoomable

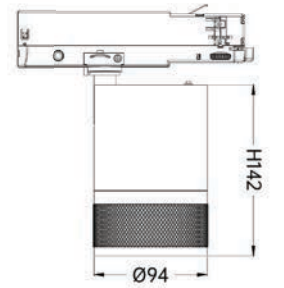

Alternate Angle

ADDABLE ACCESSORIES







TLSA


Product code	TLSA020	TLSA030	TLSA040
Power (W)	20W	30W	40W
Lumen (Lm)	1800	2700	3800
Size (mm)	Ø95xH91	Ø95xH101	Ø95xH129
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		



Strategic partners

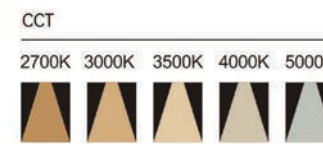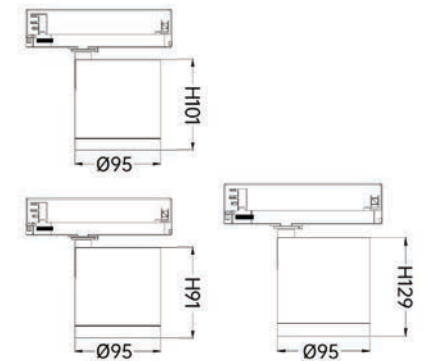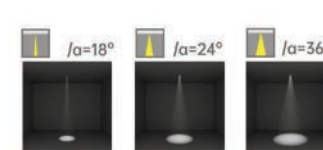

Light distribution curve

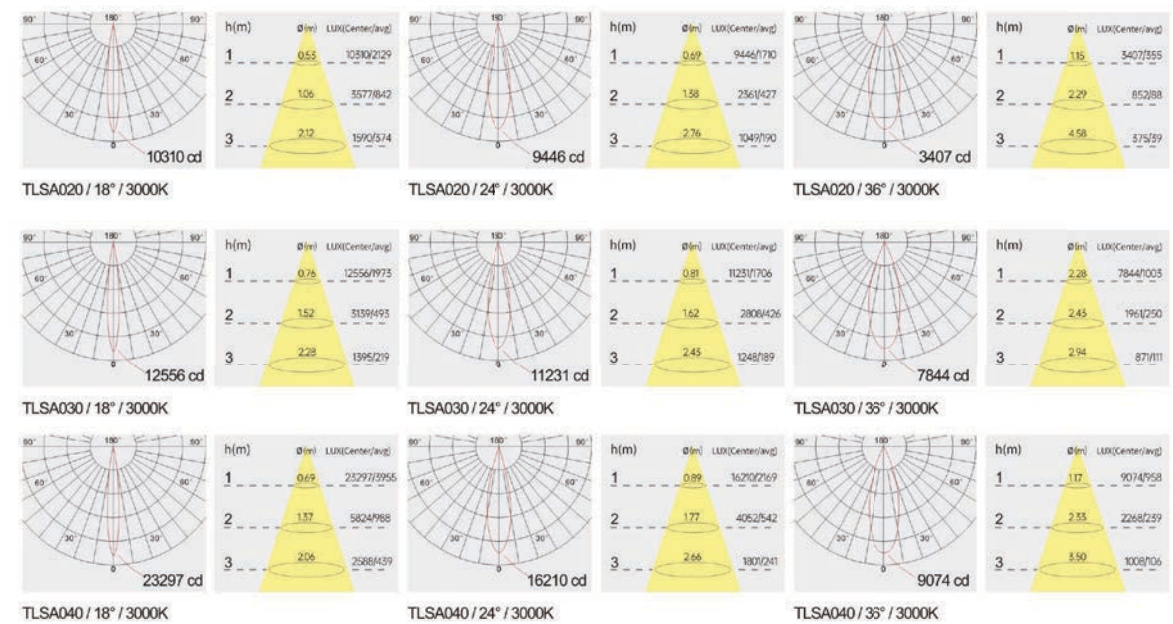


5 in 1 CCT DIP

ADDABLE ACCESSORIES


TLSC

Product code	TLSC030
Power (W)	30W
Lumen (Lm)	2500
Size (mm)	Ø94xH101
Voltage	220-240V / 100-277V
PF	>0.9
CRI	83 / 90 / 95 / Thrive
Color	Black / White / Customized


Strategic partners

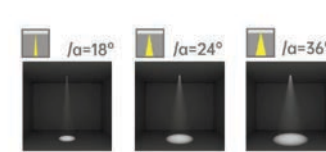


Product close-up

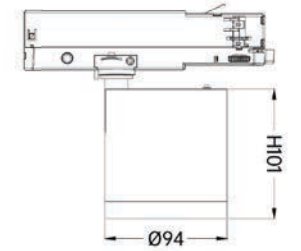

CCT

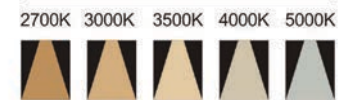

Light distribution curve

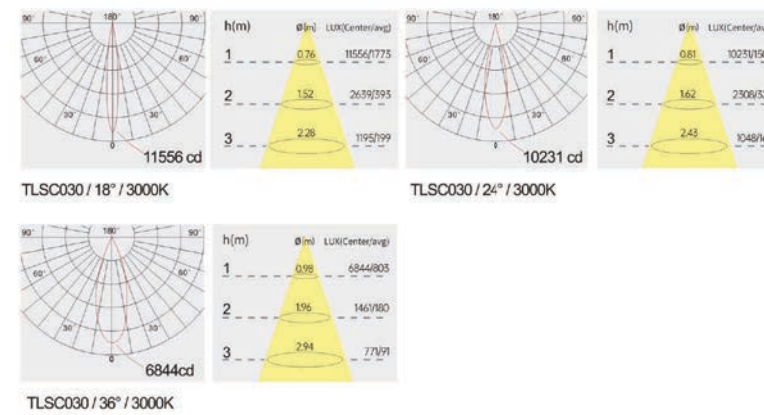

ACCESORRIES




CODE:TLX-D-H
Honey Bomb



CODE:TLX-D-X
X Anti-glare



CODE:TLX-D-D
Deep Anti-glare



CODE:TLX-D-F
Four Leaf Slider



CODE:TLX-D-S
Soft Light Optic



CODE:TLX-D-A
Asymmetric Optic



CODE: TLX-D-O
Opal Optic



CODE: TLX-D-T
Rectangle Optic








CODE:TLX-D-R/Y/B
Red/Yellow/Brown
Light Optic



silux

VENUS

Classical TLA track light, Family design,
Durable and hot selling

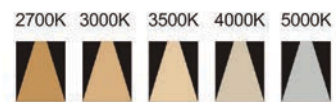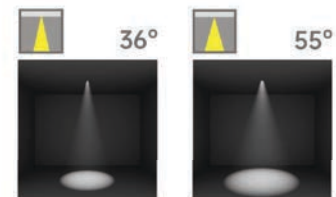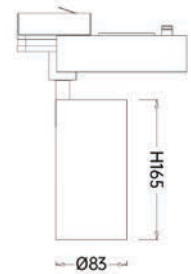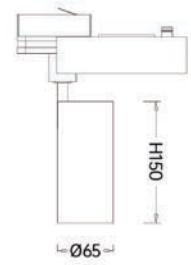


TLA1

Product code	TLA106520	TLA108330
Power (W)	20W	30W
Lumen (Lm)	1700	2500
Size (mm)	Ø65xH150	Ø83xH165
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners




Light distribution curve

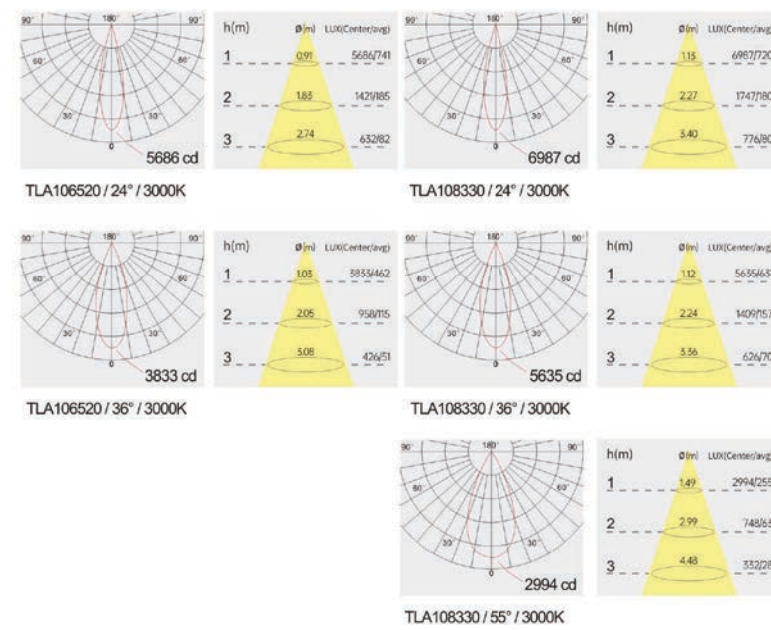

Product close-up



Optical fittings

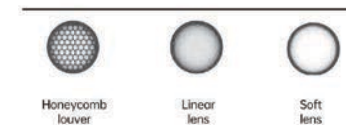


TLA1

Product code	TLA109540	TLA110550
Power (W)	40W	50W
Lumen (Lm)	3400	4200
Size (mm)	Ø95xH175	Ø105xH180
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners









Light distribution curve

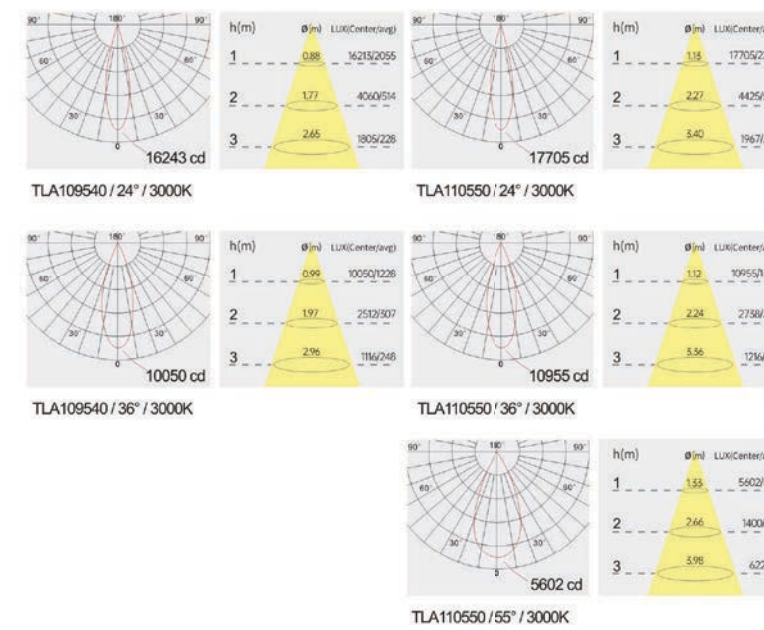

Product close-up



Optical fittings

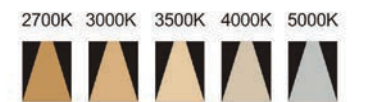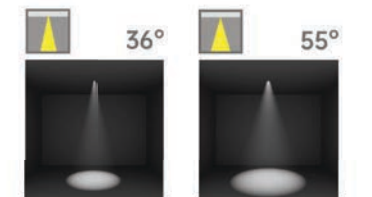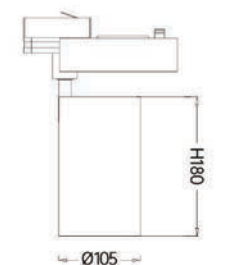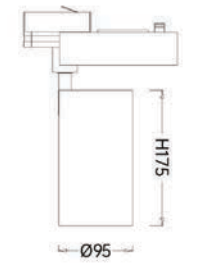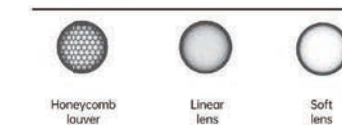




TLA2

Product code	TLA206520	TLA208330
Power (W)	20W	30W
Lumen (Lm)	1700	2500
Size (mm)	Ø65xH150	Ø83xH165
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners






Light distribution curve

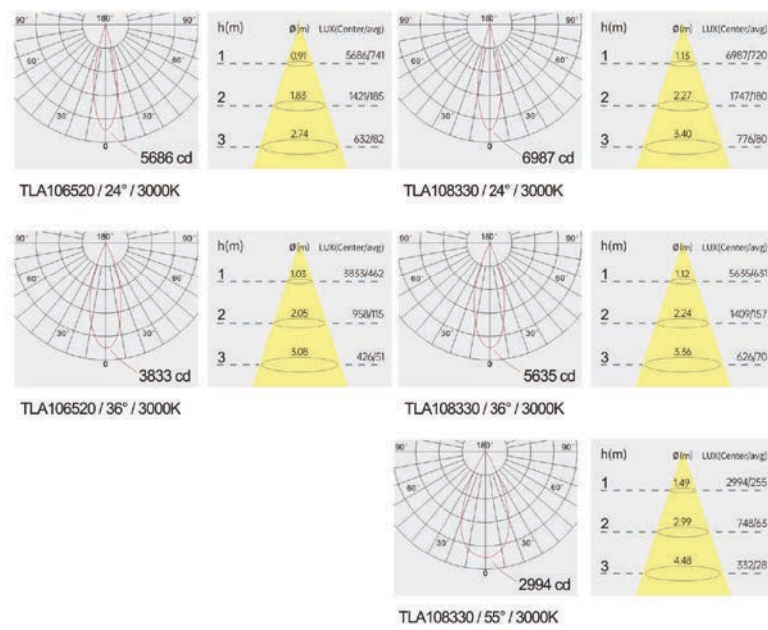

Product close-up



Optical fittings

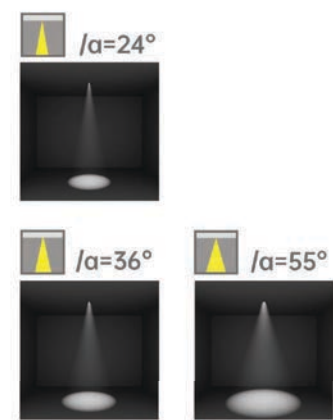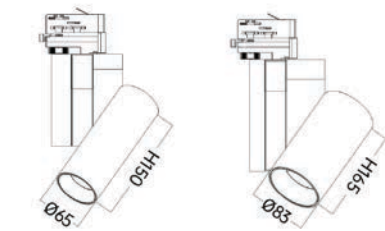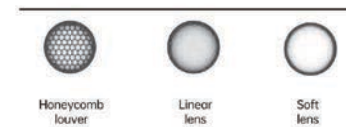


TLA2

Product code	TLA29540	TLA210550
Power (W)	40W	50W
Lumen (Lm)	3400	4200
Size (mm)	Ø95xH175	Ø105xH180
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners







Light distribution curve

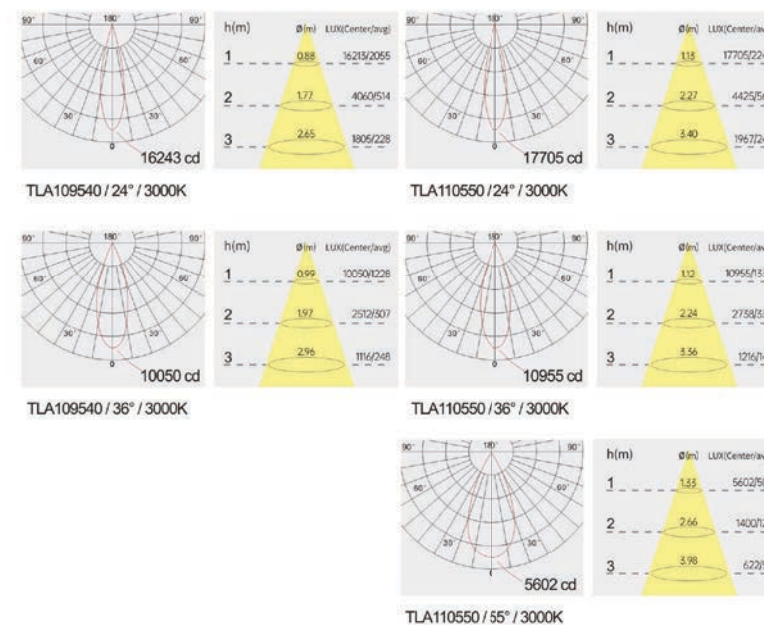

Product close-up



Optical fittings

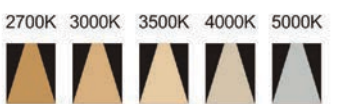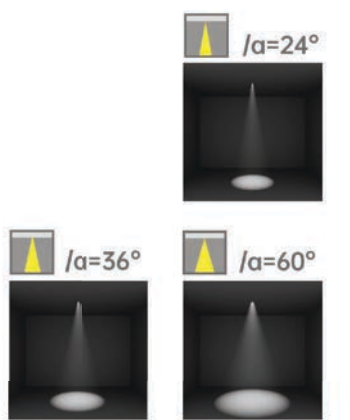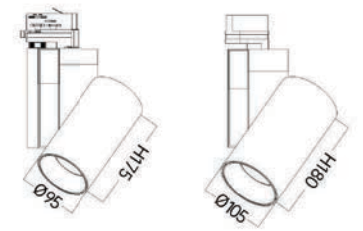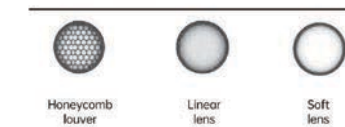




TLA3

Product code	TLA305515	TLA306520
Power (W)	15W	20W
Lumen (Lm)	1000	1600
Size (mm)	Ø55xH169	Ø65xH185
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners




Light distribution curve

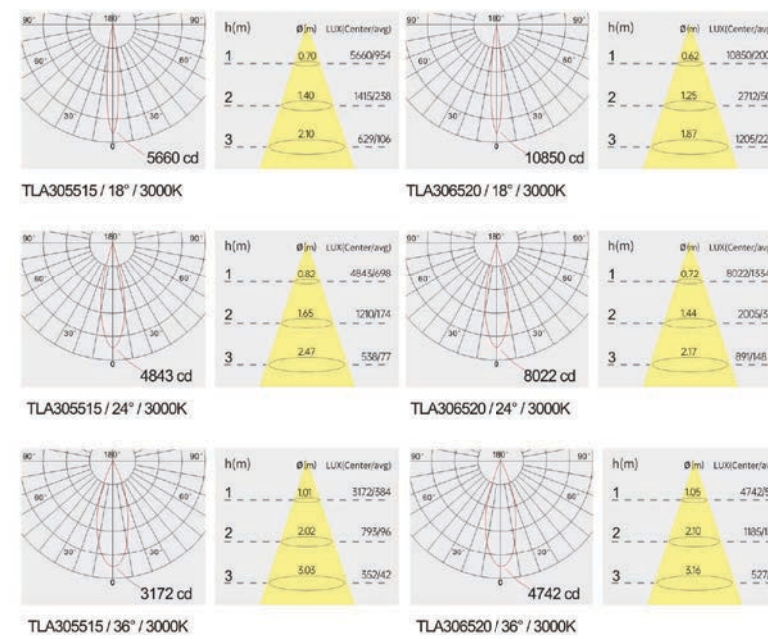

Optical fittings



Product close-up

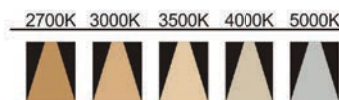


TLA3

Product code	TLA308330	TLA309540
Power (W)	30W	40W
Lumen (Lm)	2500	3600
Size (mm)	Ø83xH215	Ø95xH238
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners






Light distribution curve

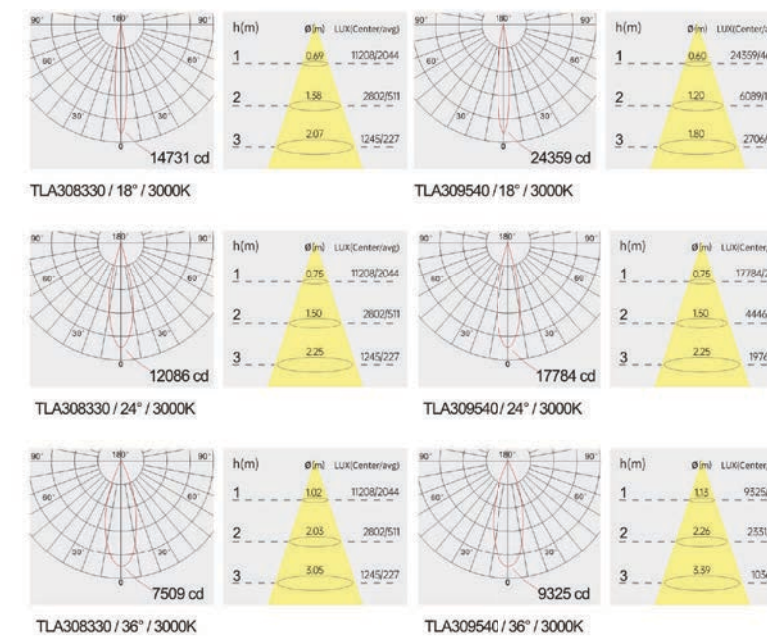

Optical fittings




Product close-up

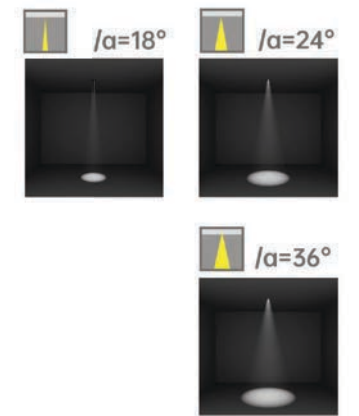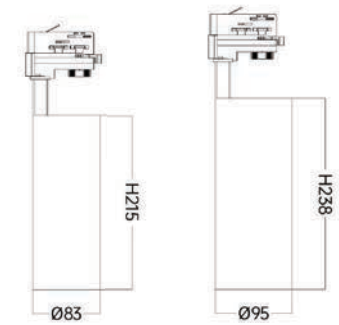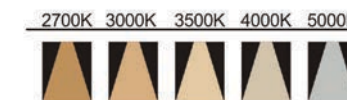

silux

MARS

Zoomable TLD track light, Perfect light form, Smooth experience, Museum first choice

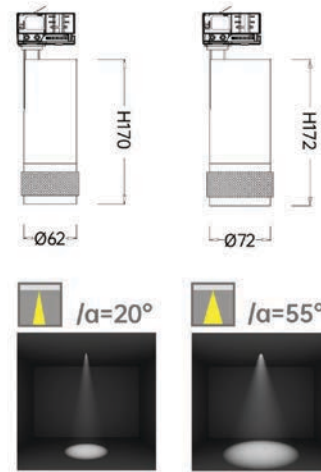


TLD

Product code	TLD06215	TLD07224
Power (W)	15W	24W
Lumen (Lm)	900-1250	1800-2000
Size (mm)	Ø62xH170	Ø72xH172
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners




Light distribution curve

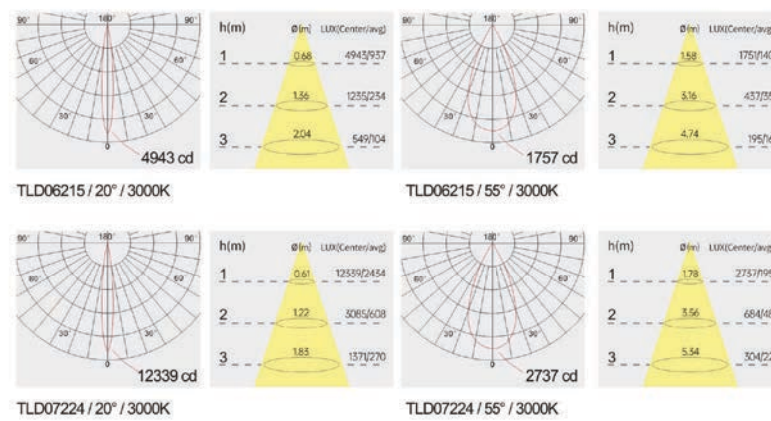

Optical fittings



Product close-up

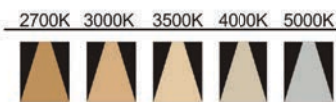


TLD

Product code	TLD08030	TLD09440
Power (W)	30W	40W
Lumen (Lm)	2250-2600	2800-3600
Size (mm)	Ø80xH187	Ø94xH190
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners





Light distribution curve

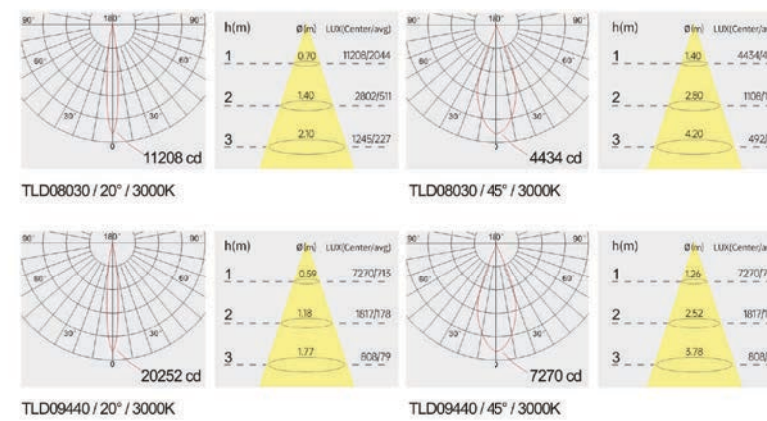


Optical fittings



Product close-up

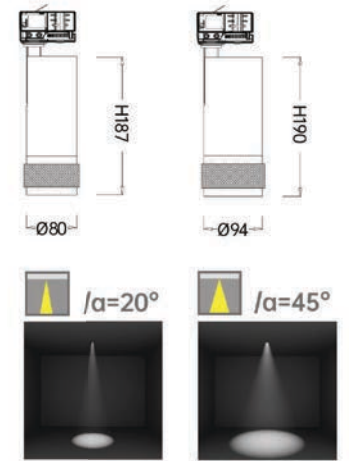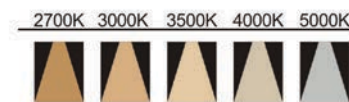

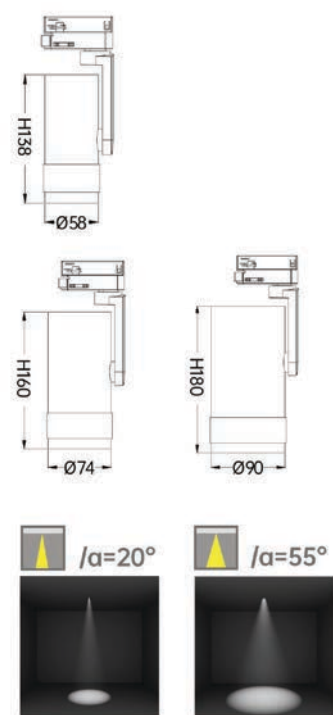


TLDC

Product code	TLDC06015	TLDC07524	TLDC09035
Power (W)	15W	24W	35W
Lumen (Lm)	700-1050	1800-2000	2900-3200
/ Size (mm)	Ø58xH138	Ø74xH160	Ø90xH180
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners




Light distribution curve

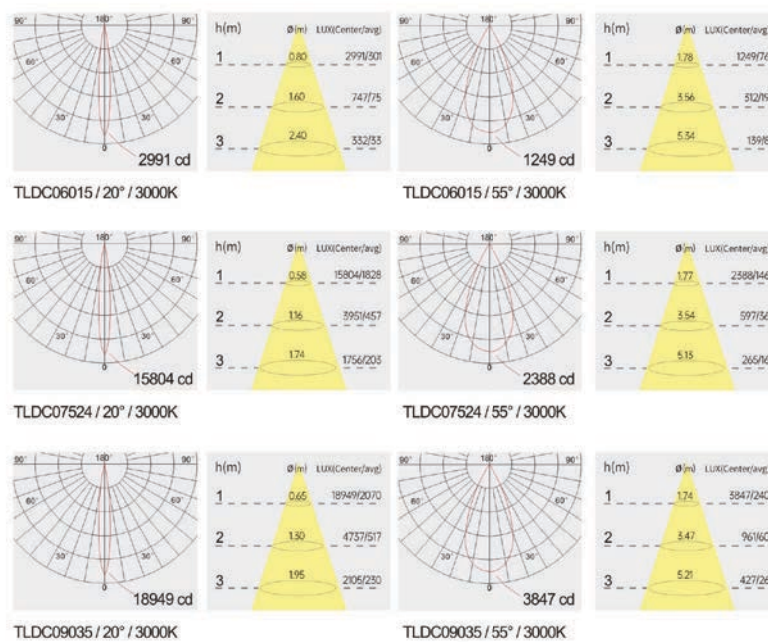

Optical fittings



Product close-up

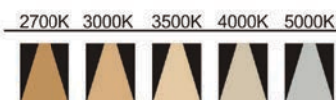


silux

JUPITER

Retro Deign, Elegant,
Fashion, Hidden style adaptor




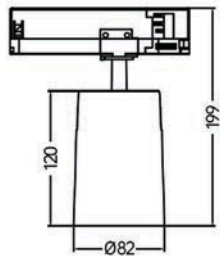




TLE

Product code	TLE030S	TLE030
Power (W)	30W	30W
Lumen (Lm)	3750	3000
Size (mm)	Ø82xH120	
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	F90	83 / 90 / 95 / Thrive
Color	Black / White / Customized	

Strategic partners

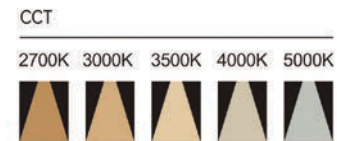



Light distribution curve

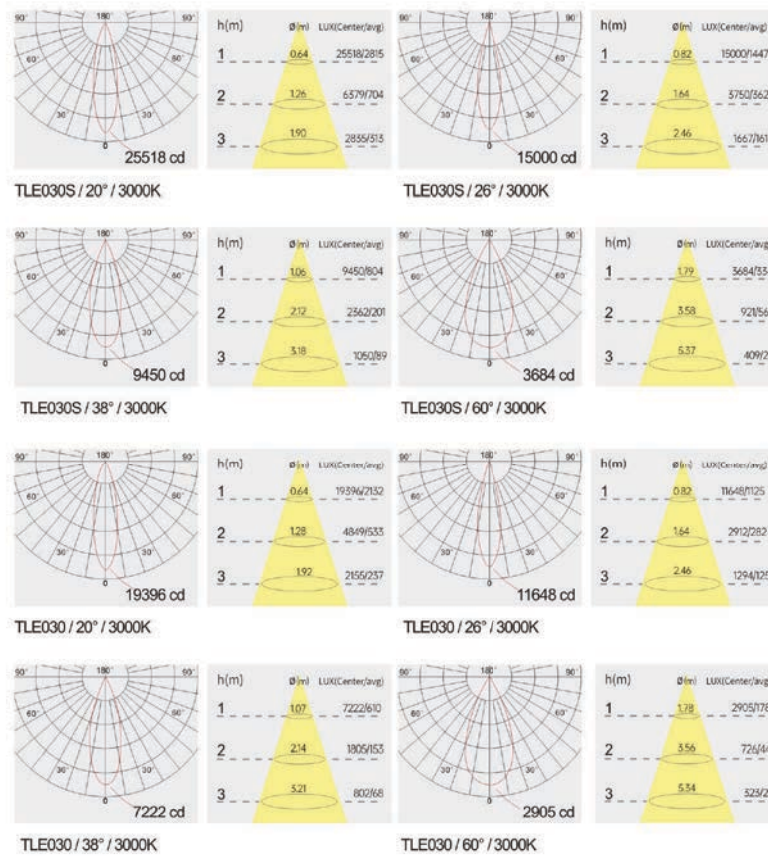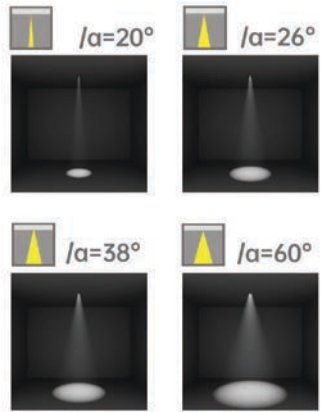





TLI

Product code	TLI108320	TLI109530	TLI110540
Power (W)	20W	30W	40W
Lumen (Lm)	1600	2500	3200
Size (mm)	Ø83xH65	Ø95xH75	Ø105xH80
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners

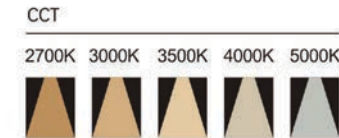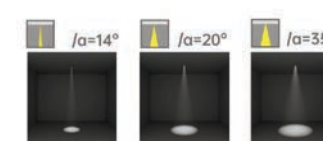

Light distribution curve

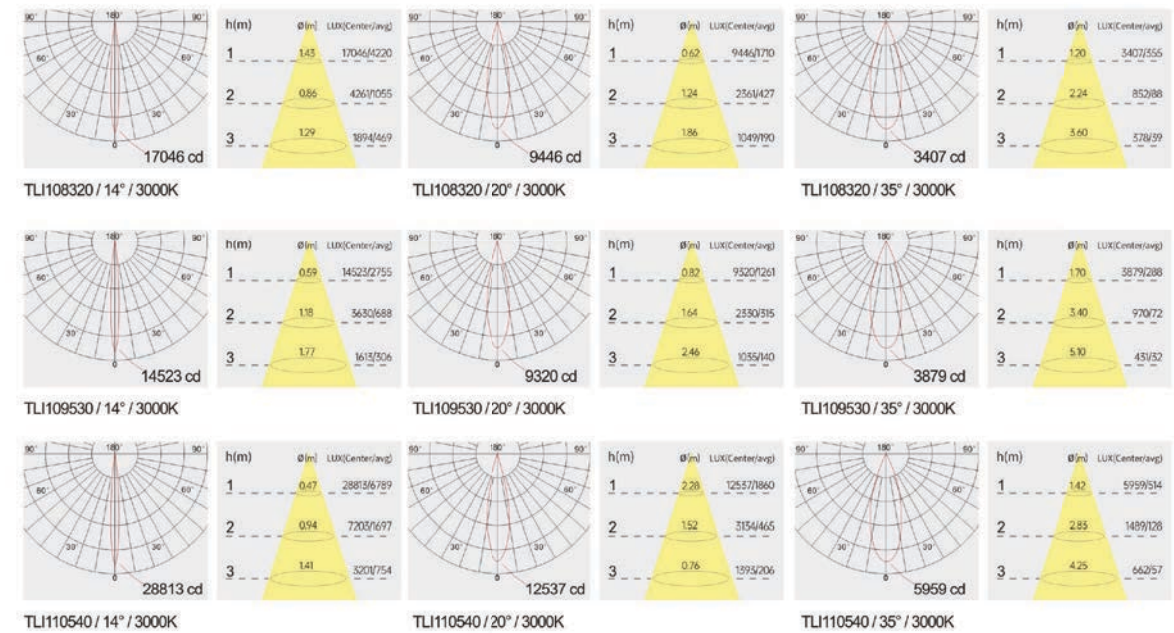







NCTL-4

Product code	NCTL-4-800	NCTL-4-900	NCTL-4-1000
Power (W)	20W	30W	40W
Lumen (Lm)	1850	2600	3800
Size (mm)	Ø78xH167	Ø92xH194	Ø105xH209
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners

LED
 Driver

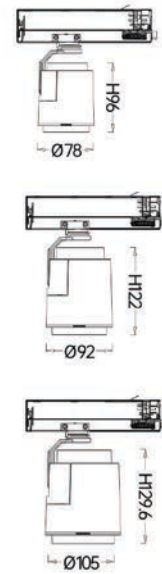

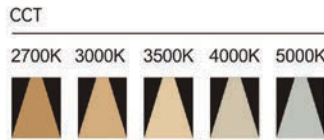
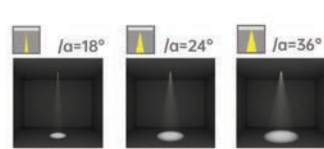


NCTL-3


Product code	NCTL-3-800	NCTL-3-900	NCTL-3-1000
Power (W)	20W	30W	40W
Lumen (Lm)	1850	2600	3800
Size (mm)	Ø78xH167	Ø92xH194	Ø105xH209
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners


LED
 Driver

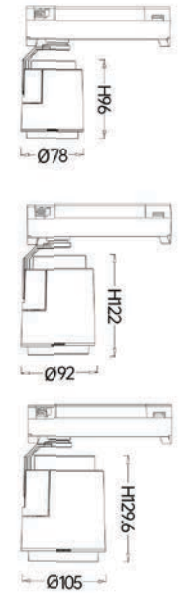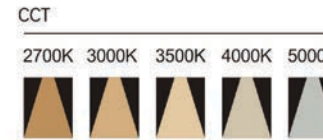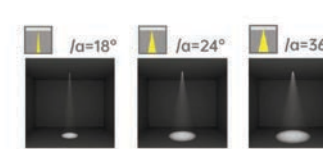

Light distribution curve

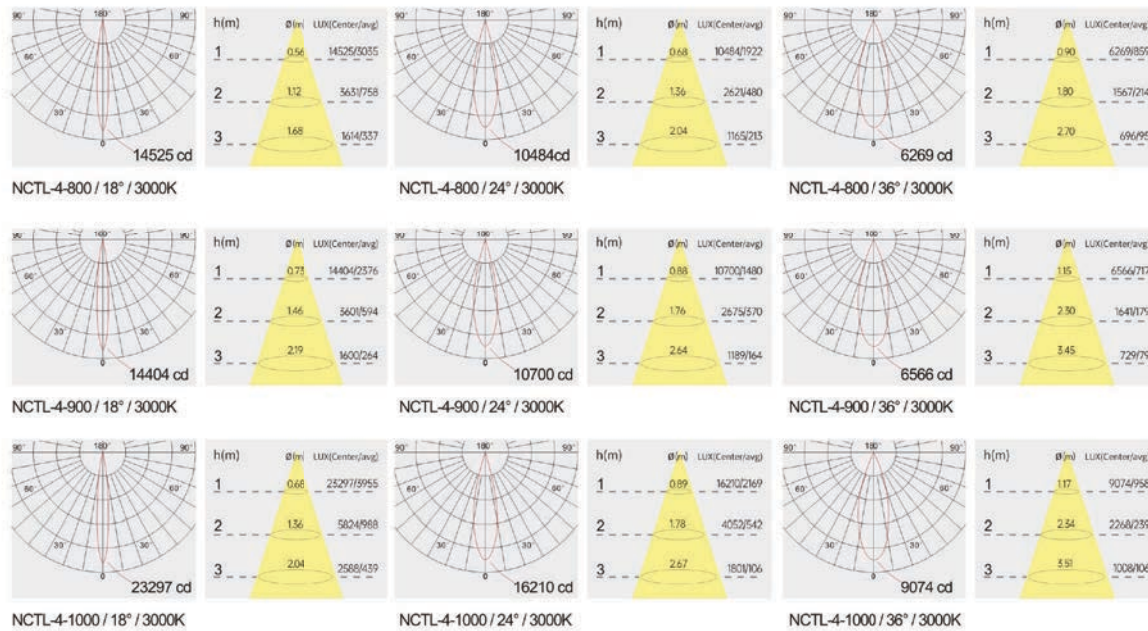

Light distribution curve

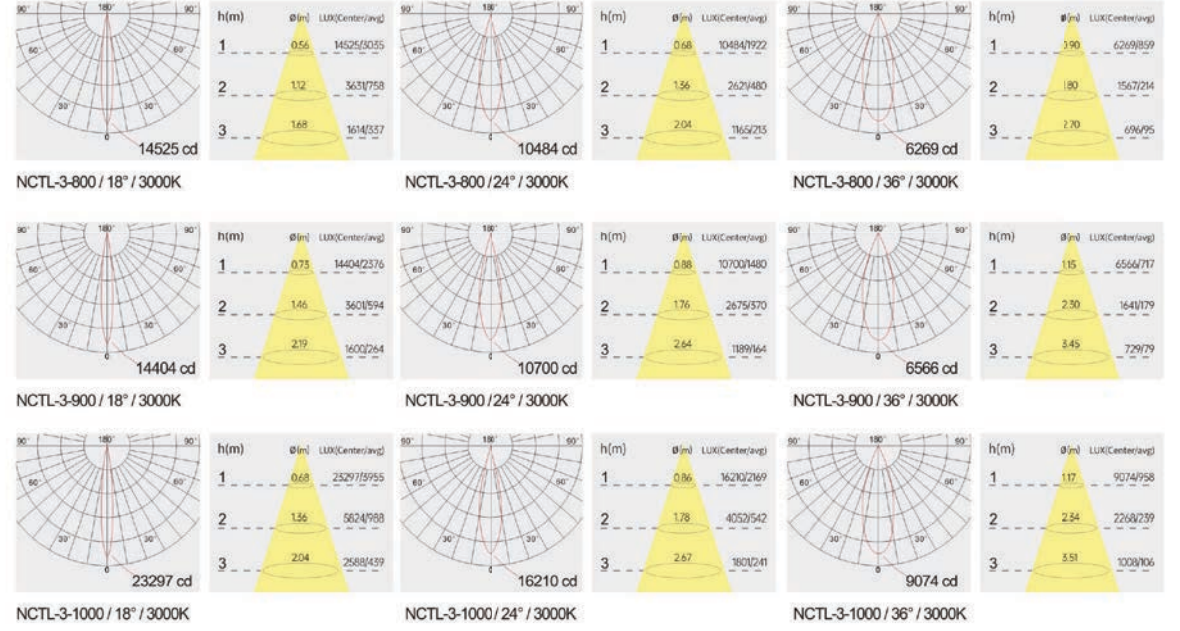

SATURN

Economic & Brief design,
Best-selling in project.



Product code	TLJ06215	TLJ07224
Power (W)	15W	24W
Lumen (Lm)	1250	2300
Size (mm)	Ø62xH140	Ø72xH160
Voltage	220-240V / 100-277V	
PF	>0.5 / >0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Product code	TLJ08030	TLJ09440
Power (W)	30W	40W
Lumen (Lm)	2900	4000
Size (mm)	Ø80xH180	Ø94xH190
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	




Strategic partners



Strategic partners




Light distribution curve

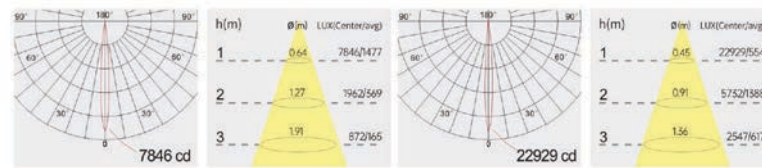


TLJ06215 / 15° / 3000K

TLJ07224 / 15° / 3000K

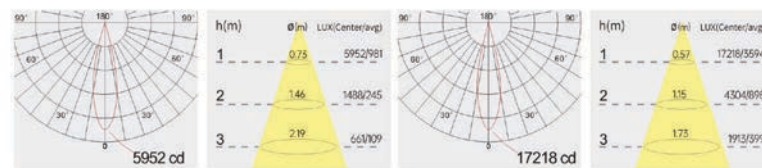

TLJ06215 / 24° / 3000K

TLJ07224 / 24° / 3000K

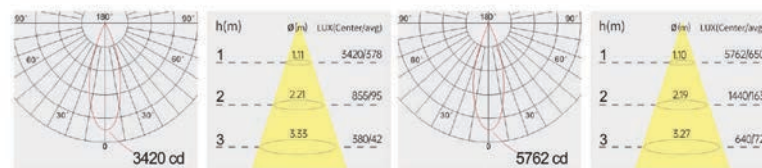


TLJ06215 / 36° / 3000K

TLJ07224 / 36° / 3000K


Optical fittings



Product close-up

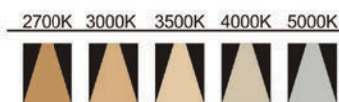


Light distribution curve

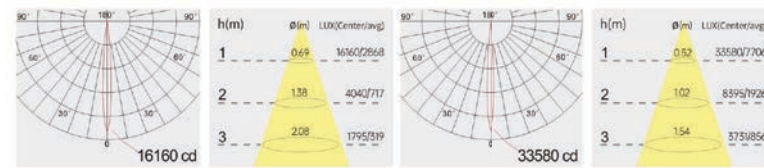


TLJ08030 / 15° / 3000K

TLJ09440 / 15° / 3000K

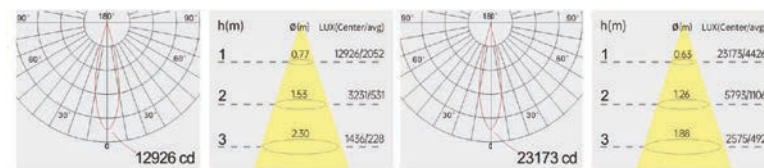

TLJ08030 / 24° / 3000K


TLJ09440 / 24° / 3000K

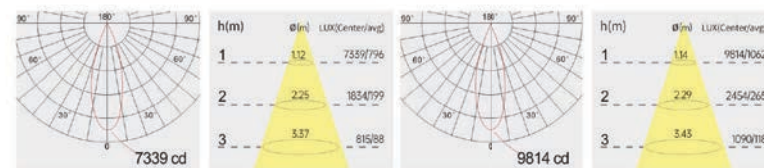


TLJ08030 / 36° / 3000K

TLJ09440 / 36° / 3000K

Optical fittings

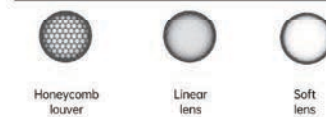

Product close-up

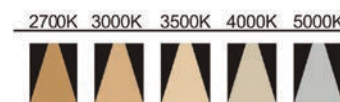




NCH4

Product code	NCH06215-4	NCH07024-4
Power (W)	15W	24W
Lumen (Lm)	1250	2300
Size (mm)	Ø62xH140	Ø70xH140
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners




Light distribution curve

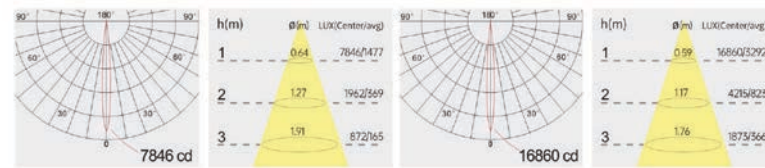


NCH06215-4 / 15° / 3000K

NCH07024-4 / 15° / 3000K

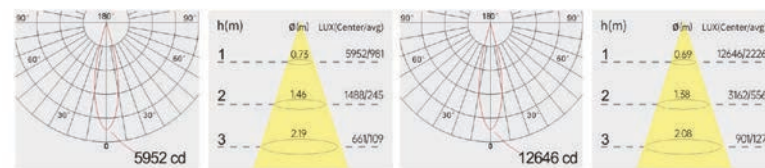

NCH06215-4 / 24° / 3000K


NCH07024-4 / 24° / 3000K

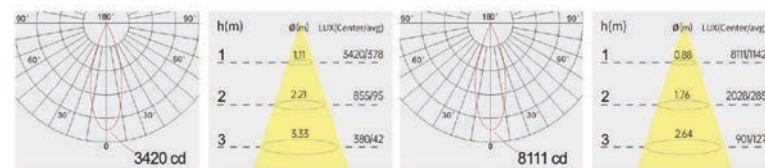


NCH06215-4 / 36° / 3000K

NCH07024-4 / 36° / 3000K

Optical fittings

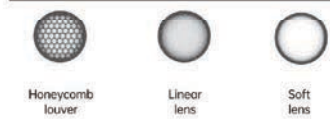

Product close-up

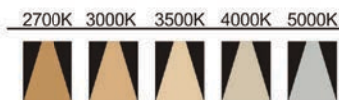


NCH4

Product code	NCH08030-4	NCH09040-4
Power (W)	30W	40W
Lumen (Lm)	2900	4000
Size (mm)	Ø80xH158	Ø90xH158
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners




Light distribution curve

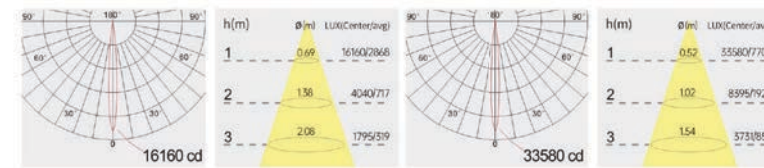


NCH08030-4 / 15° / 3000K

NCH09040-4 / 15° / 3000K

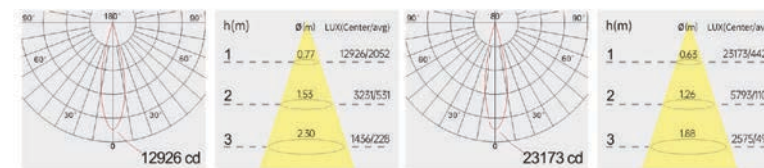

NCH08030-4 / 24° / 3000K


NCH09040-4 / 24° / 3000K

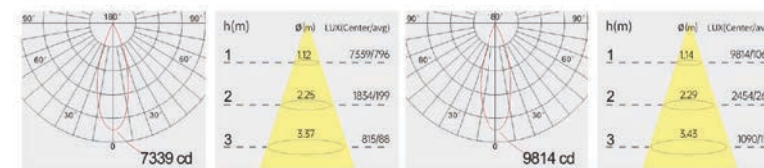


NCH08030-4 / 36° / 3000K

NCH09040-4 / 36° / 3000K

Optical fittings

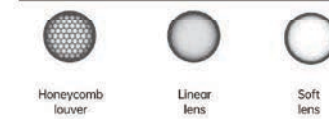

Product close-up

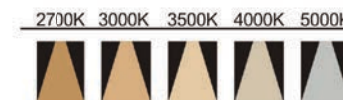





NCH3

Product code	NCH06215-4	NCH07024-4
Power (W)	15W	24W
Lumen (Lm)	1250	2300
Size (mm)	Ø62xH140	Ø70xH140
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	



Strategic partners

LED
 Driver



Light distribution curve

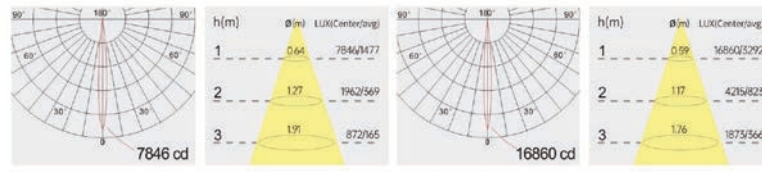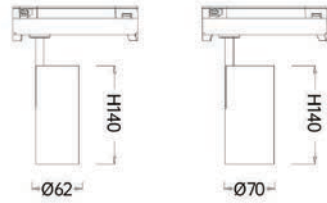

NCH06215-3 / 15° / 3000K TNCH07024-3 / 15° / 3000K

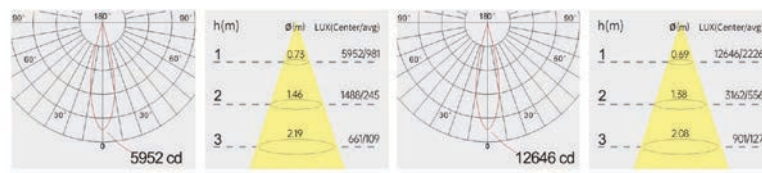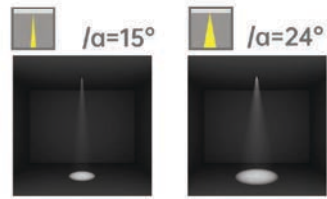


NCH06215-3 / 24° / 3000K TNCH07024-3 / 24° / 3000K

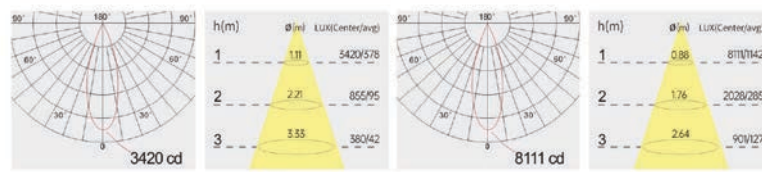


NCH06215-3 / 36° / 3000K TNCH07024-3 / 36° / 3000K

Optical fittings

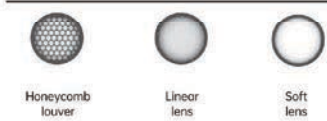

Product close-up

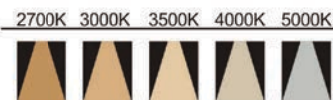



NCH3

Product code	NCH08030-4	NCH09040-4
Power (W)	30W	40W
Lumen (Lm)	2900	4000
Size (mm)	Ø80xH158	Ø90xH158
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	



Strategic partners

LED
 Driver



Light distribution curve

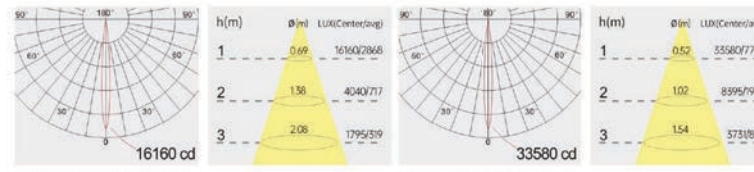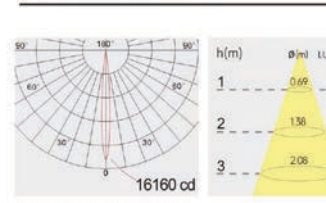

NCH08030-3 / 15° / 3000K NCH09040-3 / 15° / 3000K

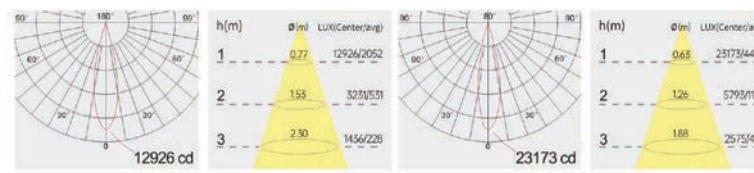
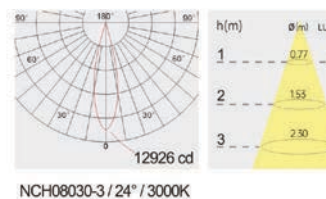


NCH08030-3 / 24° / 3000K NCH09040-3 / 24° / 3000K

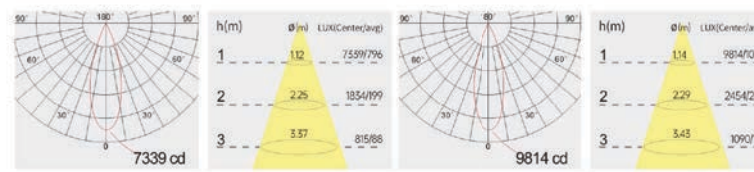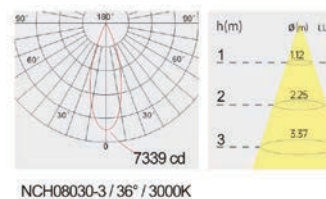


NCH08030-3 / 36° / 3000K NCH09040-3 / 36° / 3000K

Optical fittings

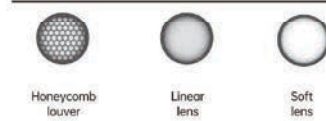

Product close-up

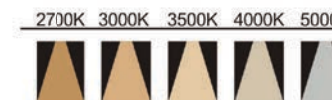

URANUS

Unique shape, High recognition,
Segmented fields application








ENFT

Product code	ENFT8528	ENFT9335
Power (W)	28W	35W
Lumen (Lm)	2800	3500
Size (mm)	Ø85xH153	Ø93xH173
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners




Light distribution curve

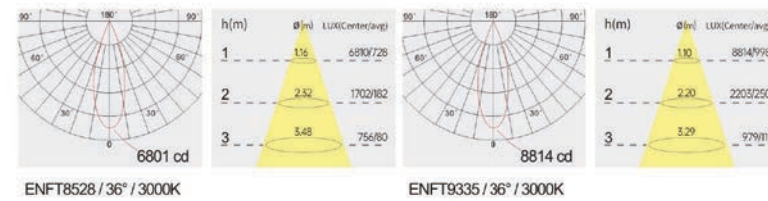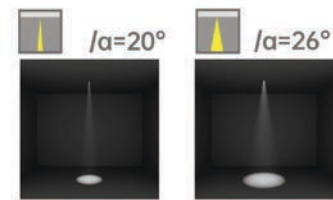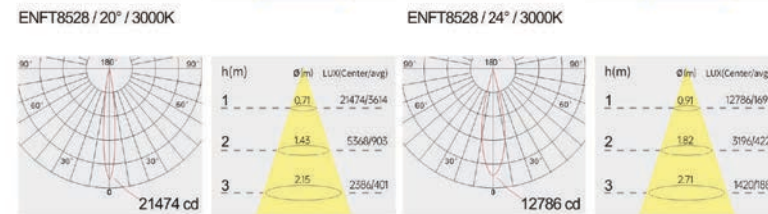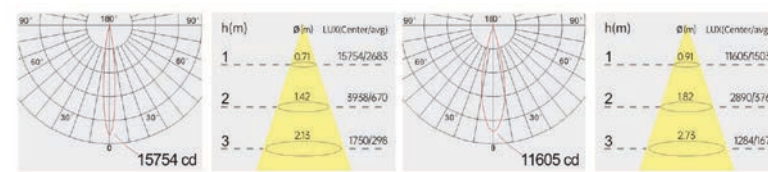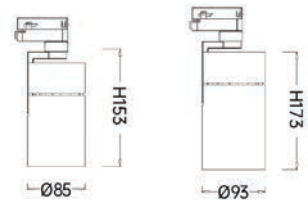

Optical fittings

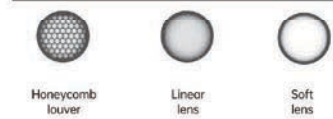



Product close-up

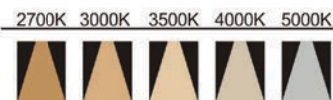




TLCB


Product code	TLCB06015	TLCB07524	TLCB09035
Power (W)	15W	24W	35W
Lumen (Lm)	1150	2200	3200
Size (mm)	Ø58xH138	Ø74xH160	Ø90xH180
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners

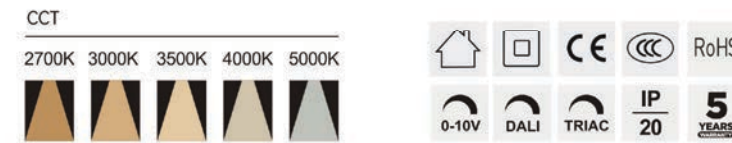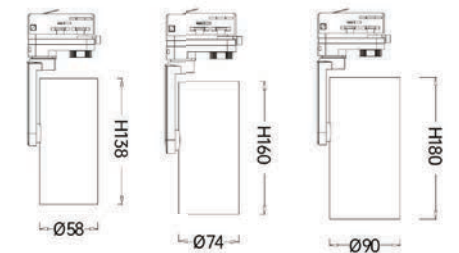

Light distribution curve

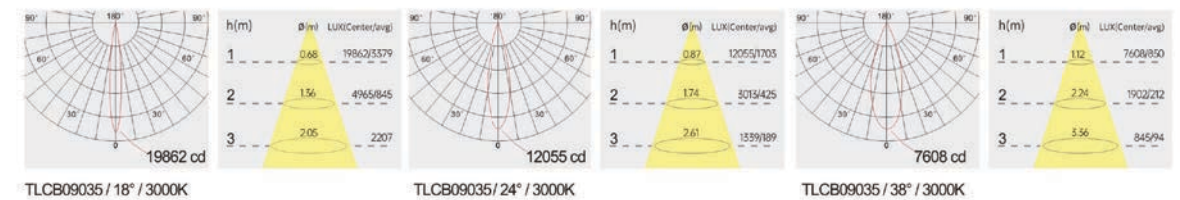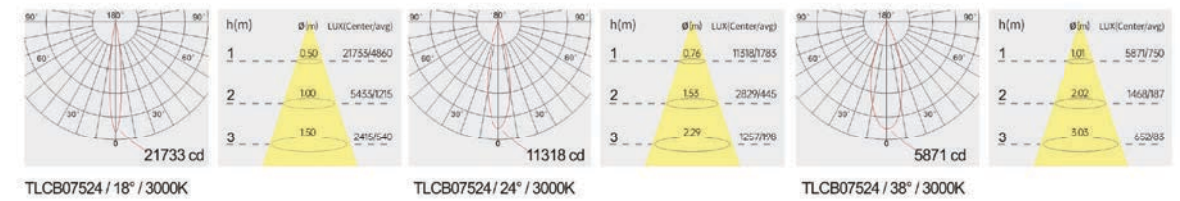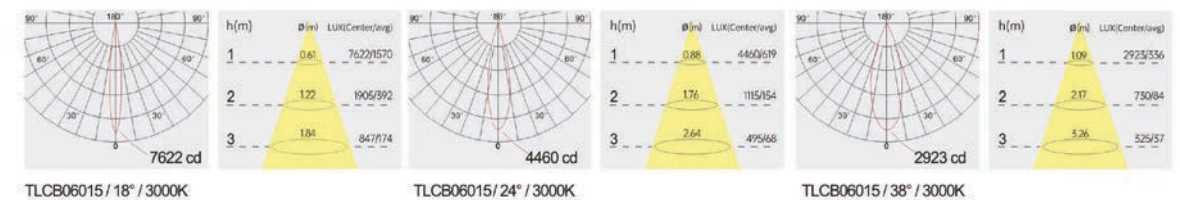

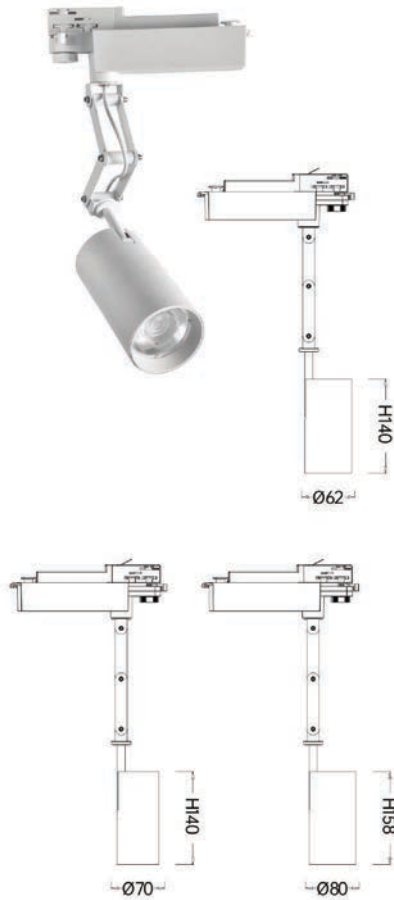

Product code	SLDB6215	SLDB7024	SLDB8035
Power (W)	15W	24W	35W
Lumen (Lm)	1250	2300	3400
Size (mm)	Ø62xH140	Ø70xH140	Ø80xH158
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		



Strategic partners




产品特写 / Product close-up




CCT

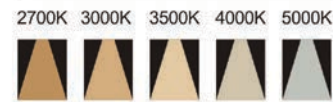


Light distribution curve

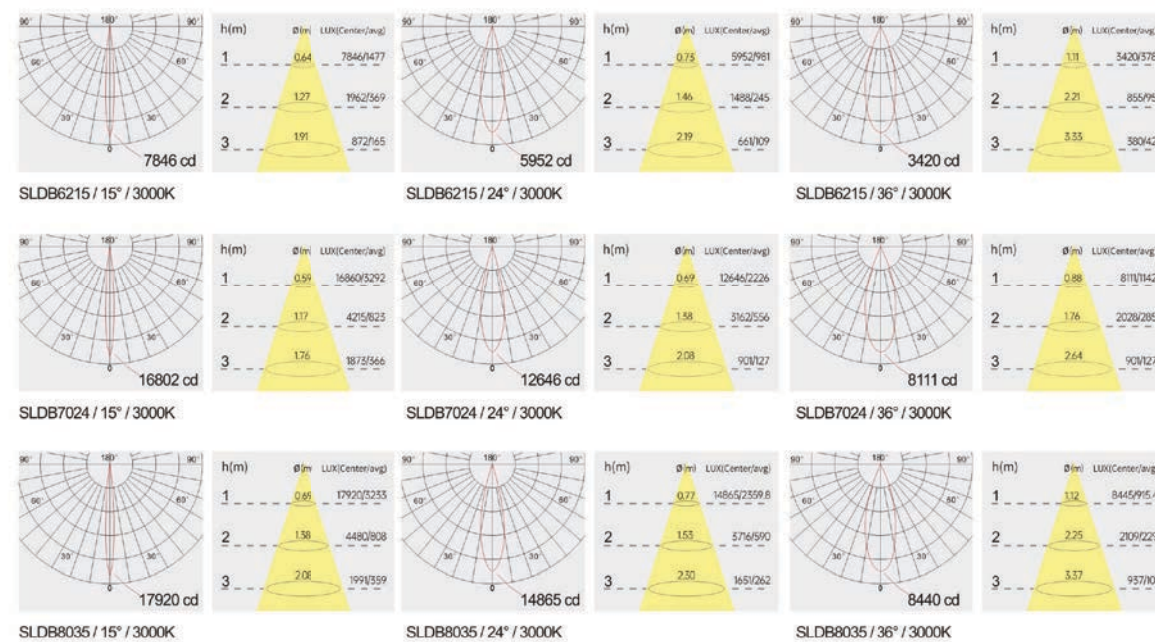

3 wires 1 phase track rail fitting
3线轨道固定件

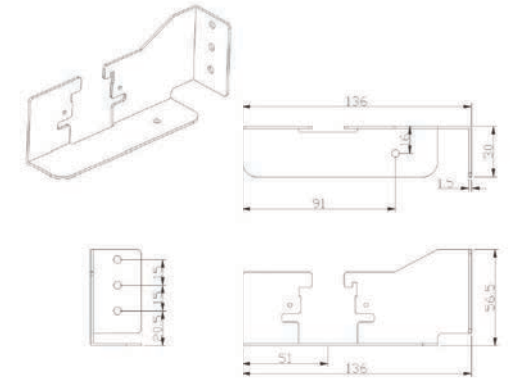

4 wires 3 phase track rail fitting
4线轨道固定件

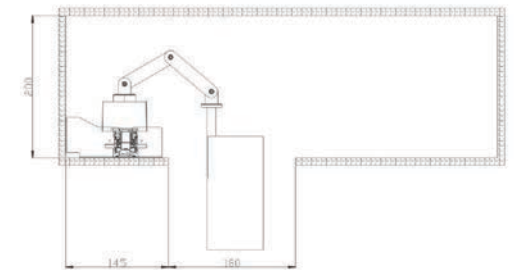

silux

NEPTUNE

Grille optic TLK track light,
Flexible beam angle, Decorous


TLKB

Product code	TLKB030
Power (W)	30W
Lumen (Lm)	2500
Size (mm)	Ø240x45x160
Voltage	220-240V / 100-277V
PF	>0.9
CRI	83 / 90 / 95 / Thrive
Color	Black / White / Customized





Strategic partners



Light distribution curve

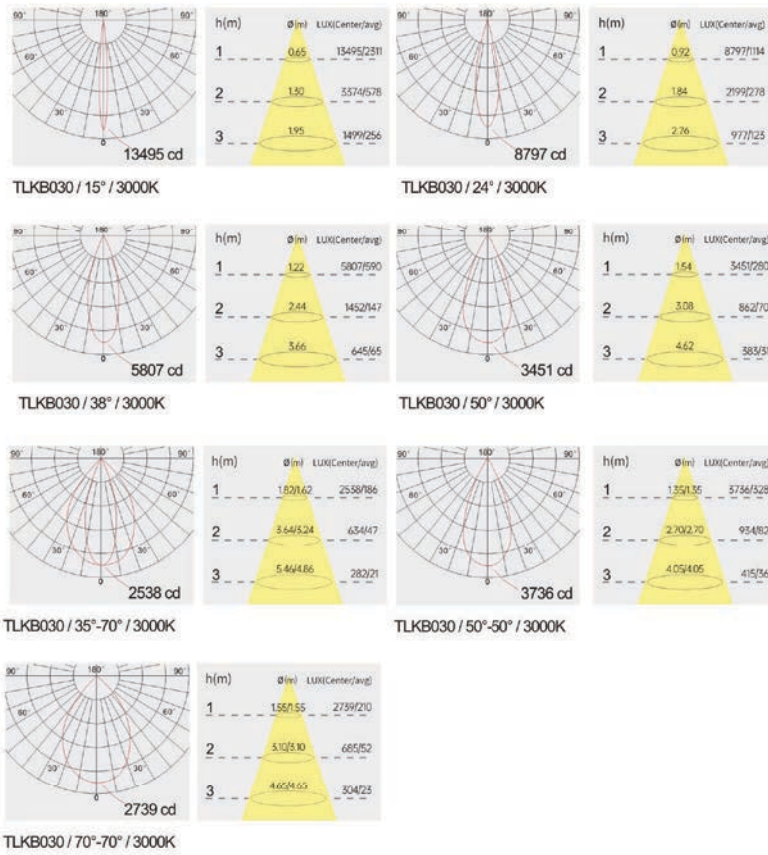

Product close-up

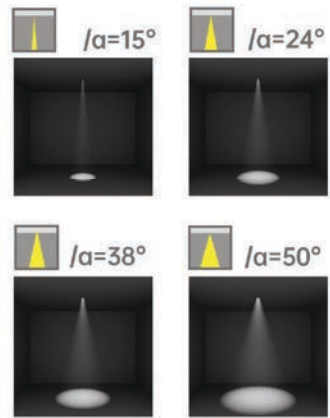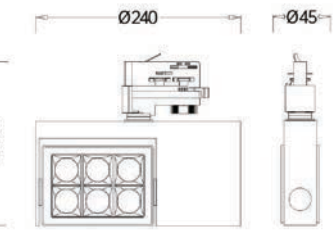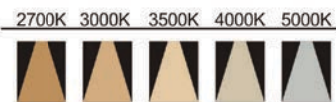


TLKC

Product code	TLKC060
Power (W)	30W*2
Lumen (Lm)	2500*2
Size (mm)	Ø405x45x160
Voltage	220-240V / 100-277V
PF	>0.9
CRI	83 / 90 / 95 / Thrive
Color	Black / White / Customized





Strategic partners



Light distribution curve

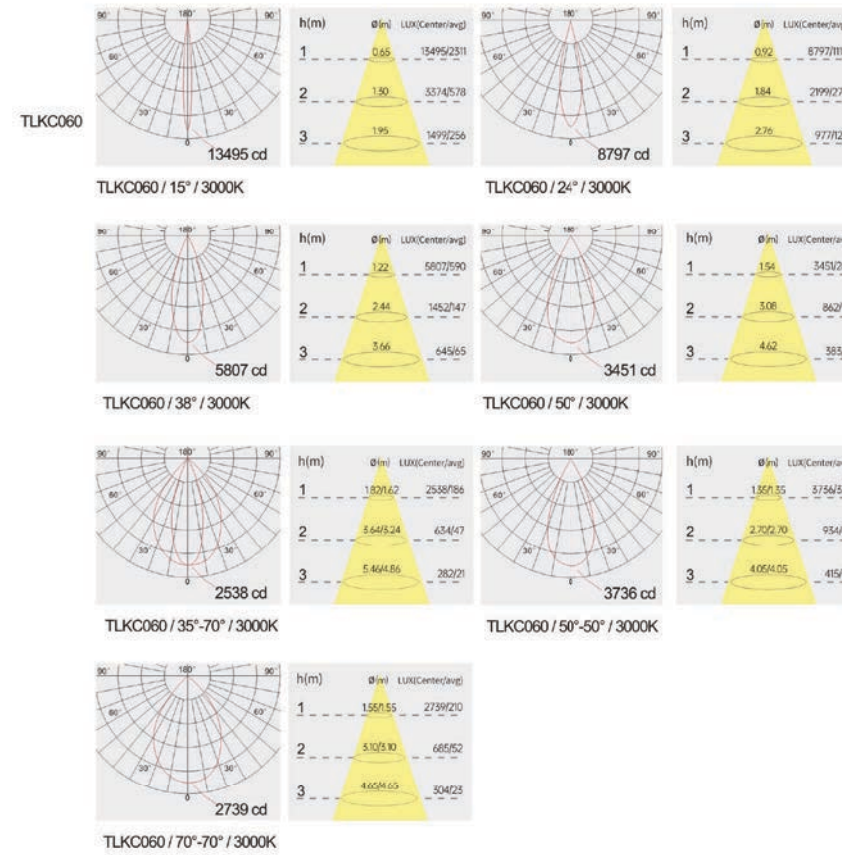

Product close-up

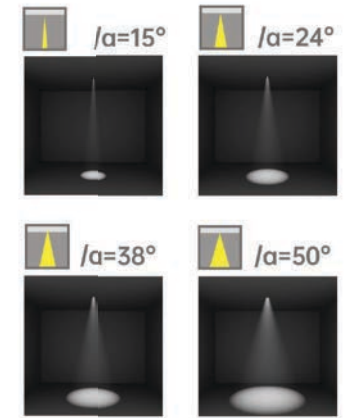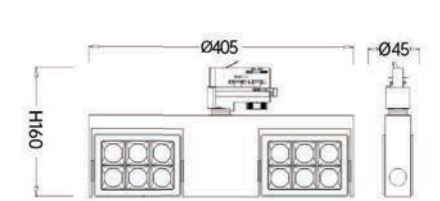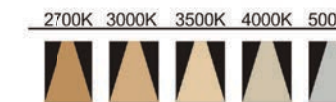



SATELLITE

P049-062



STKR STKT STKP STKS STKM

LAVENDER

P063-092



MSL CB RMI SLN

SMART

P093-096

ARK

P097-104

Violet

P105-118



SLT SLK SLV NMP

Lancer

P119-138



SLS SLW SLU SLFS SLF

Journey

P139-144

Gallery

P145-162



SLEL MSE SLOB SMX SMJ

Avenger

P163-174



SLJG SLSA SLWF SLKE SLE


Morgan

P175-182



MSC1 MSC1 MSD


silux

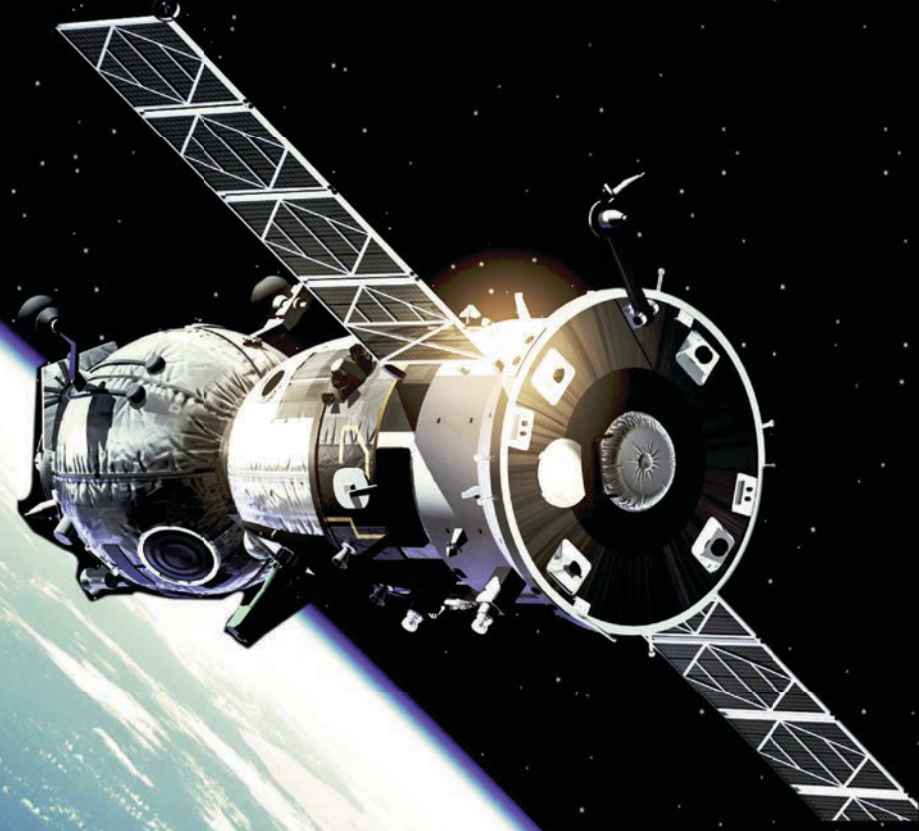

SATELLITE

Unique Satellite design, modular
flexible transfer and application

SATELLITE

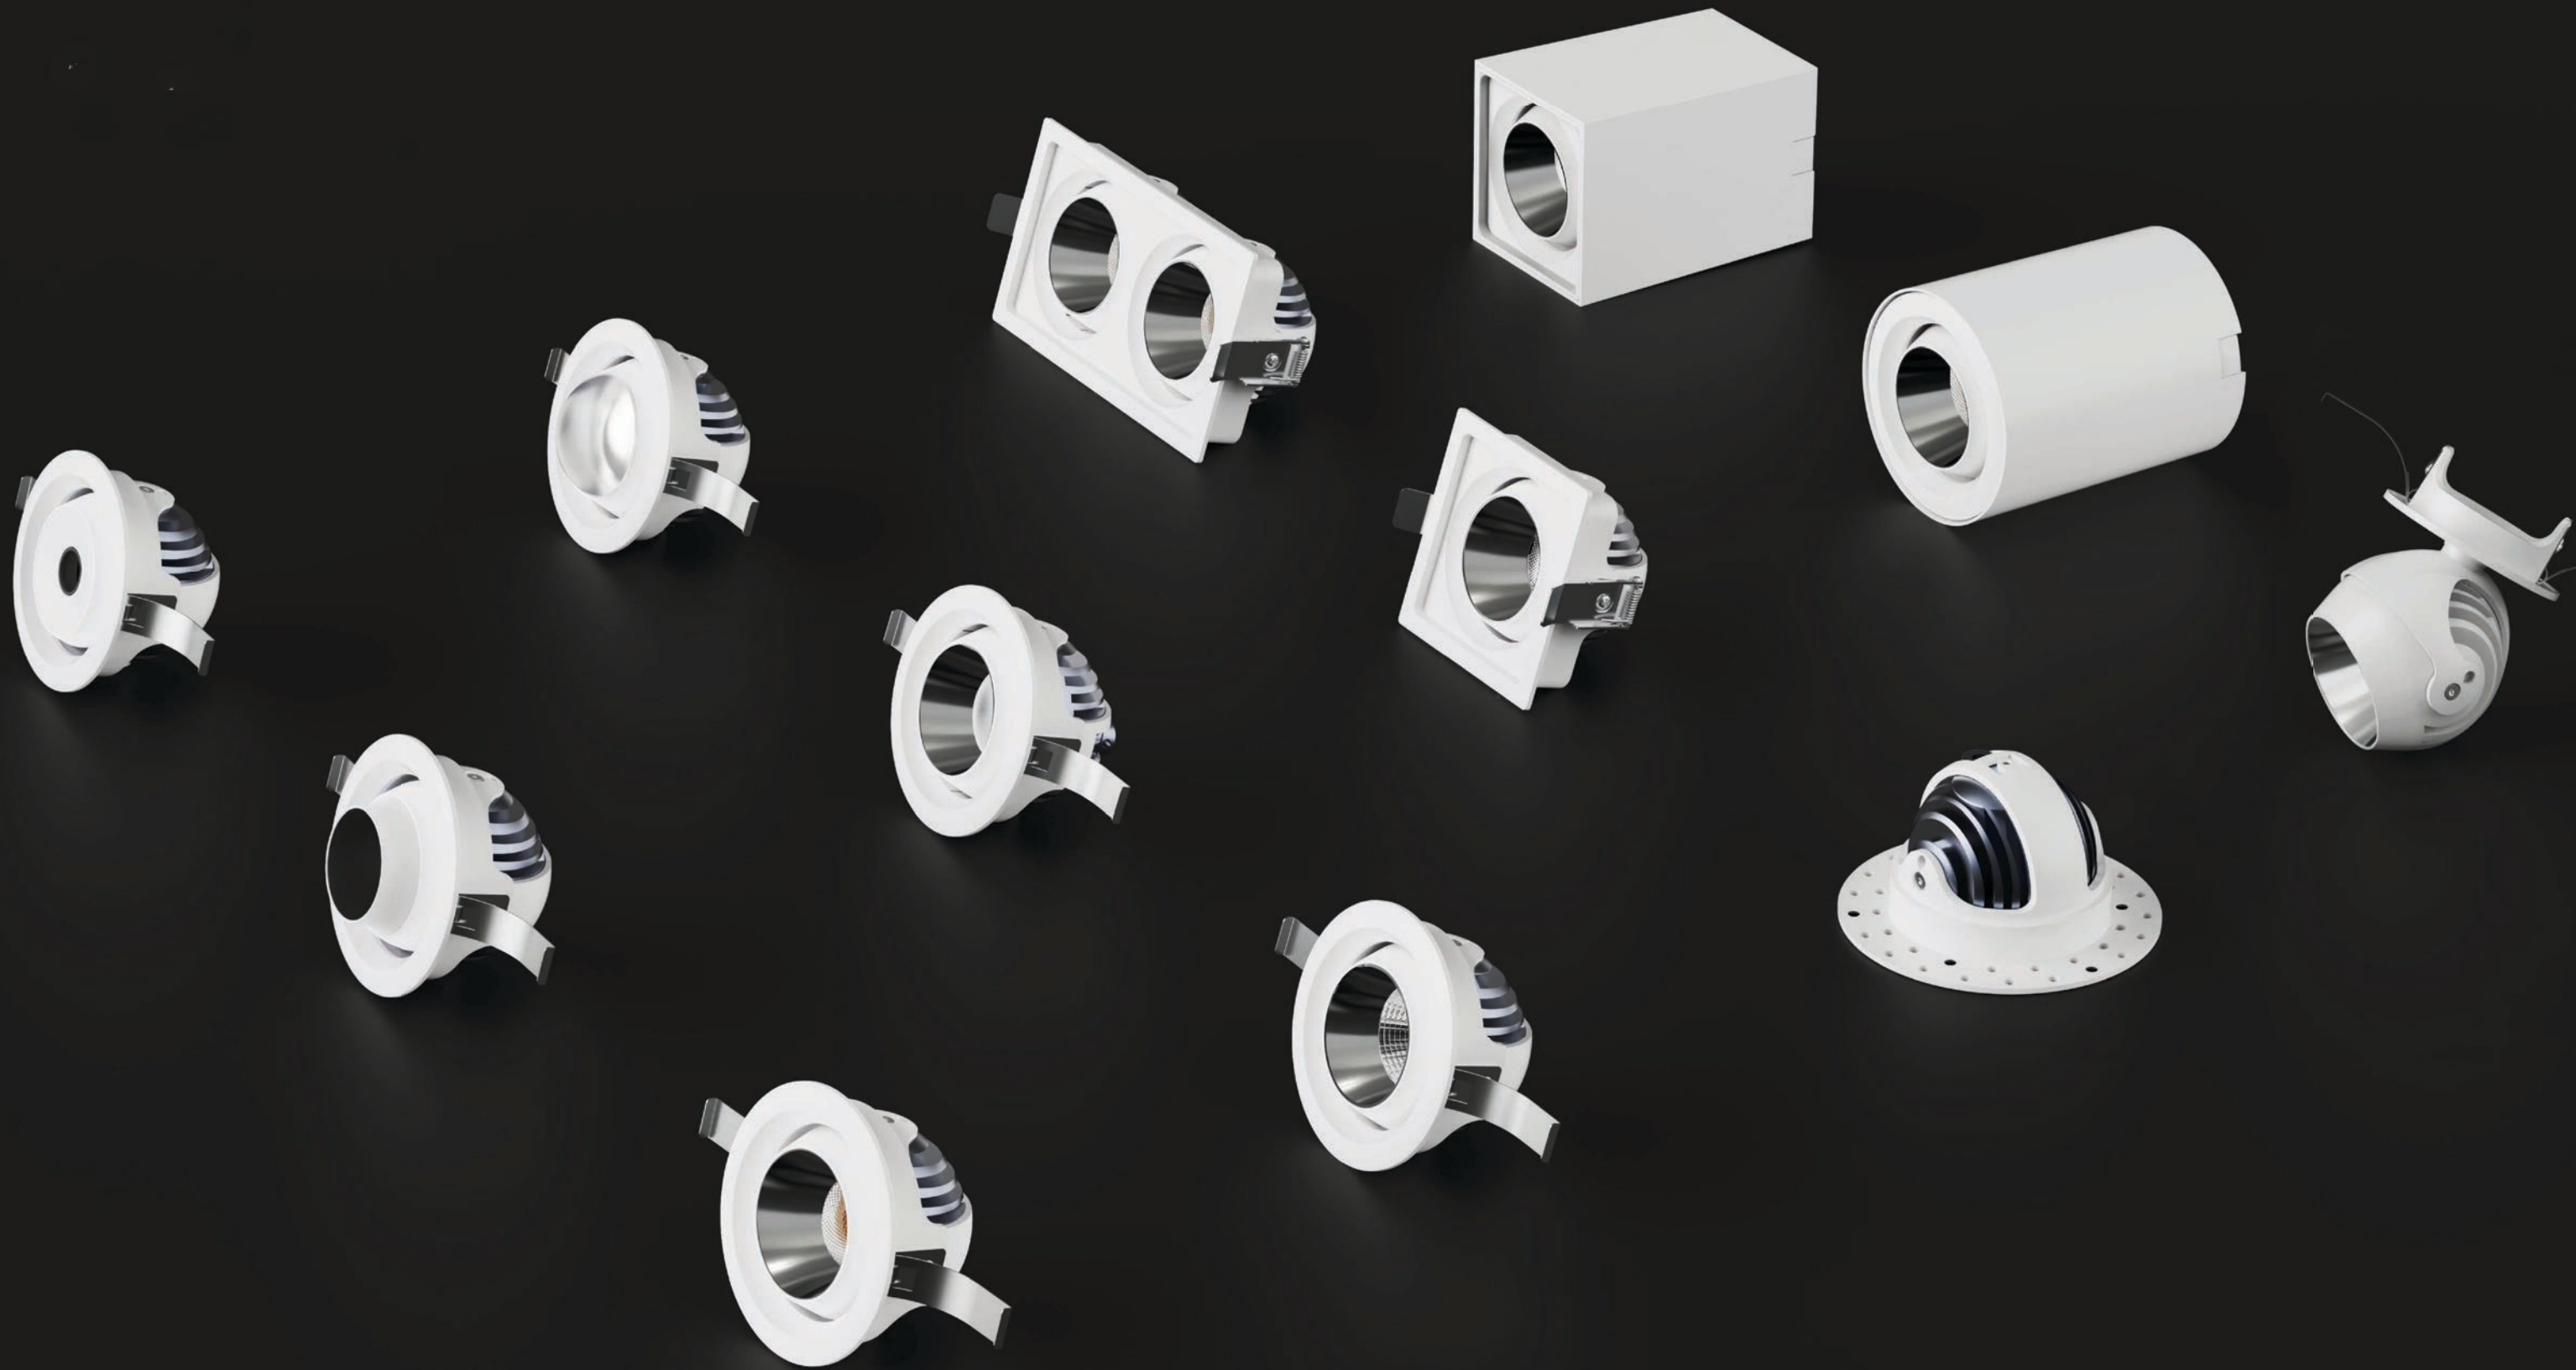






Product code	STKRA12	STKRB12	STKRC12	STKRD12
Power (W)	12W	12W	12W	12W
Lumen (Lm)	800	600	700	900
Size (mm)	Ø85xH57	Ø85xH57	Ø85xH57	Ø85xH57
Cut-off (mm)	Ø75	Ø75	Ø75	Ø75
Voltage	220-240V / 100-277V			
PF	>0.5			
CRI	83 / 90 / 95 / Thrive			
Color	Black / White / Customized			


Strategic partners



Light distribution curve

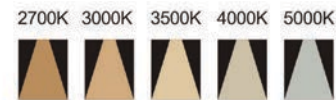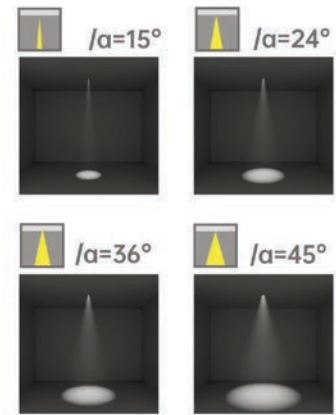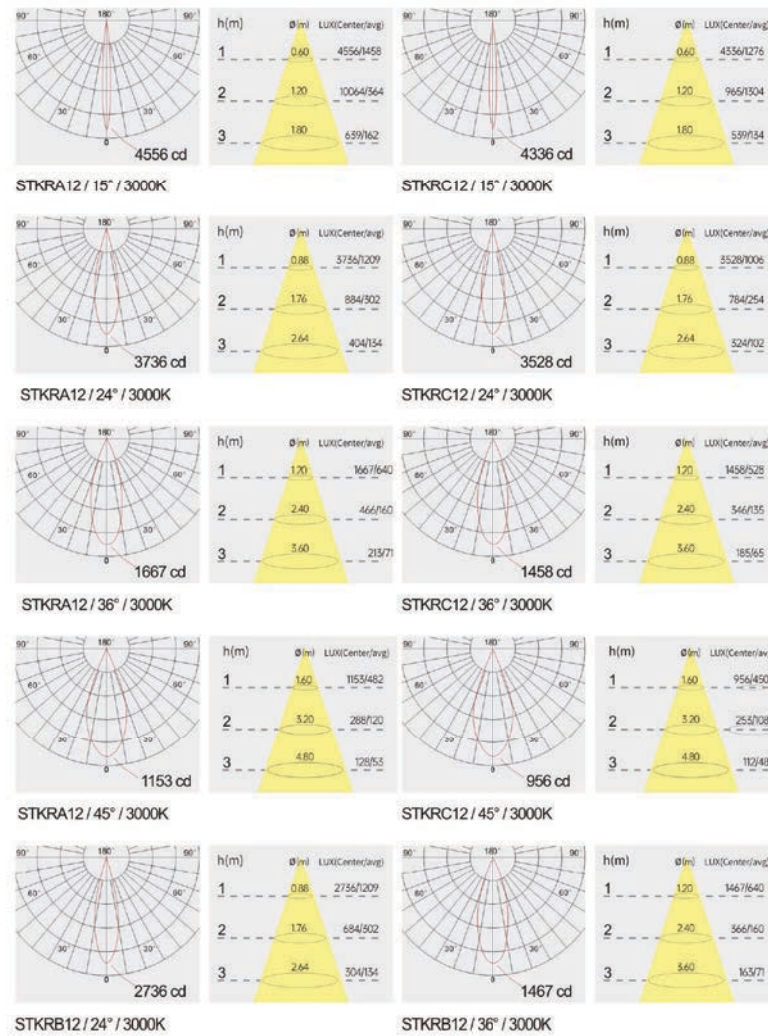

Optical fittings




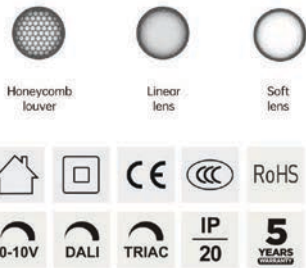


Product code	STKTA12	STKTB12	STKTC12	STKTD12
Power (W)	12W	12W	12W	12W
Lumen (Lm)	800	600	700	900
Size (mm)	Ø85xH57	Ø85xH57	Ø85xH57	Ø85xH57
Cut-off (mm)	Ø75	Ø75	Ø75	Ø75
Voltage	220-240V / 100-277V			
PF	>0.5			
CRI	83 / 90 / 95 / Thrive			
Color	Black / White / Customized			


Strategic partners



Light distribution curve

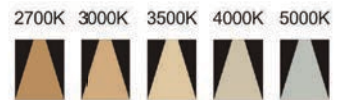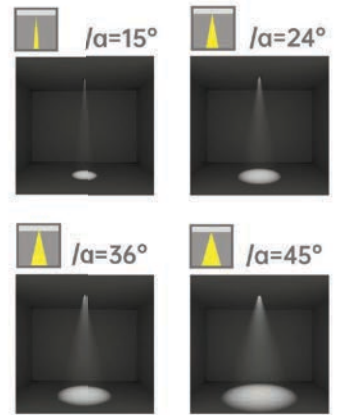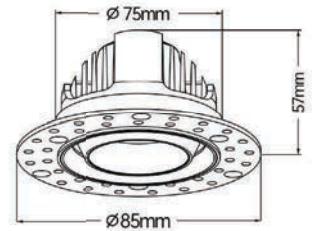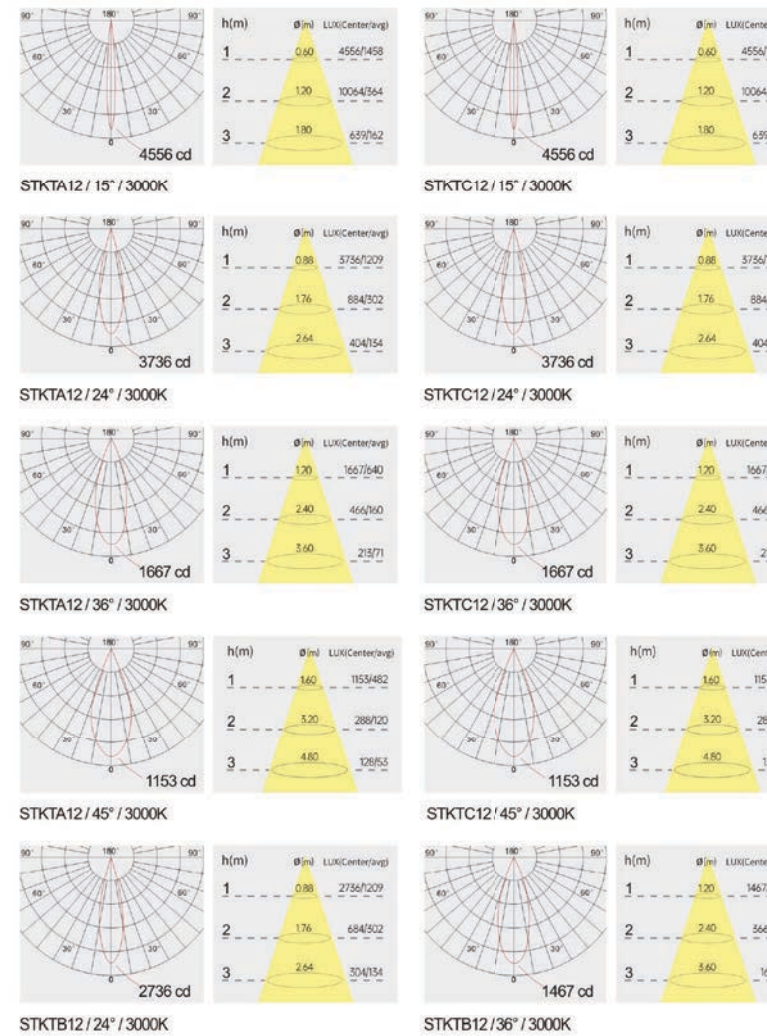

Optical fittings

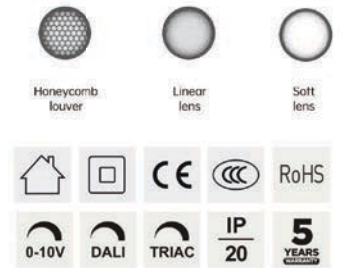

OPTICS








STKP

Product code	STKPA12	STKPB12	STKPC12	STKPD12
Power (W)	12W	12W	12W	12W
Lumen (Lm)	800	600	700	900
Size (mm)	Ø65xH95	Ø65xH95	Ø65xH95	Ø65xH95
Cut-off (mm)	Ø55	Ø55	Ø55	Ø55
Voltage	220-240V / 100-277V			
PF	>0.5			
CRI	83 / 90 / 95 / Thrive			
Color	Black / White / Customized			


Strategic partners



Light distribution curve

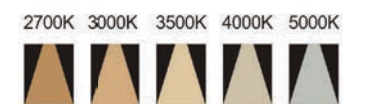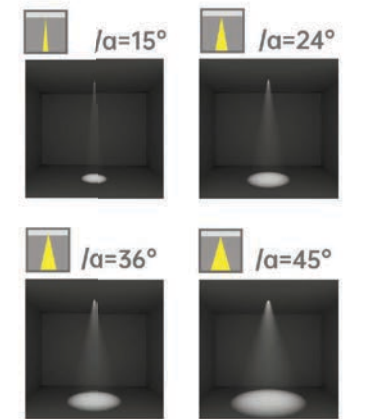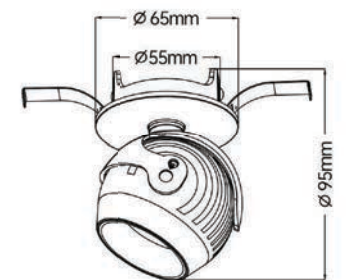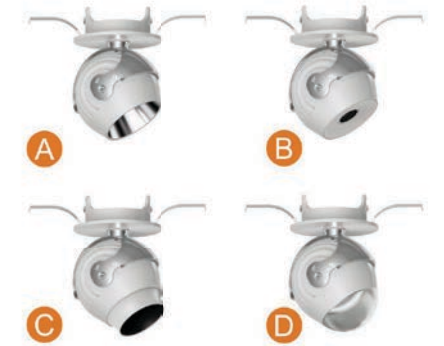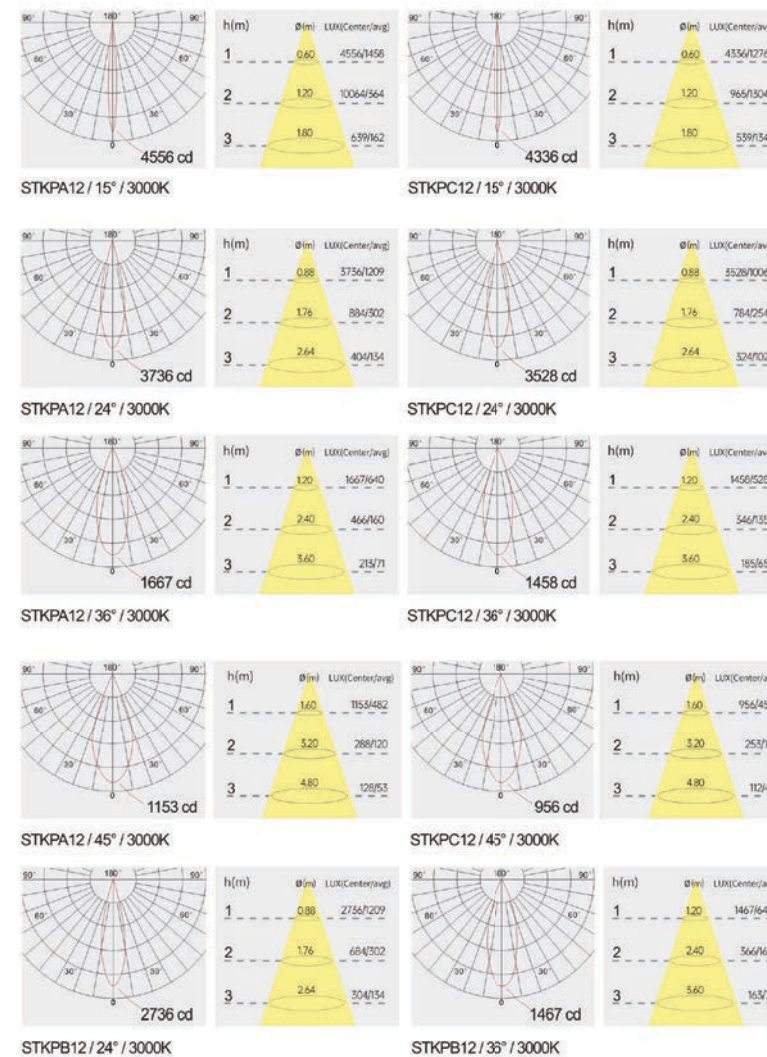

Optical fittings

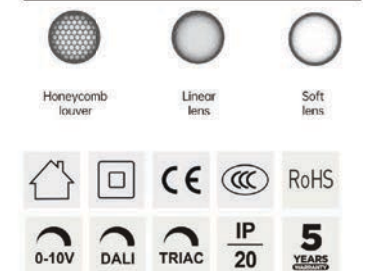

CHANGE, SO EASY

Easy to disassemble and install, according to different lighting needs, replace the light source module. In the same space, the corresponding light source module can be replaced without re-opening according to the lighting needs to meet the lighting efficiency requirements.







STKS1

Product code	STKS1A12	STKS1B12	STKS1C12	STKS1D12
Power (W)	12W	12W	12W	12W
Lumen (Lm)	800	600	700	900
Size (mm)	85x85xH60	85x85xH60	85x85xH60	85x85xH60
Cut-off (mm)	Ø75*75	Ø75*75	Ø75*75	Ø75*75
Voltage	220-240V / 100-277V			
PF	>0.5			
CRI	83 / 90 / 95 / Thrive			
Color	Black / White / Customized			


Strategic partners



Light distribution curve

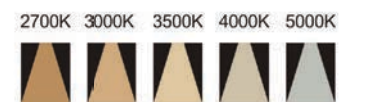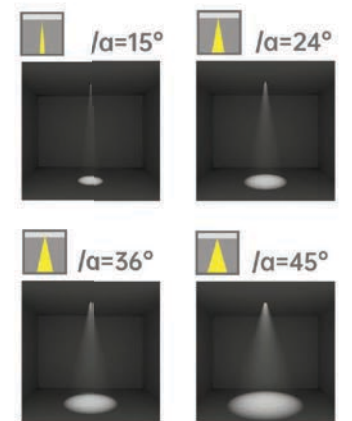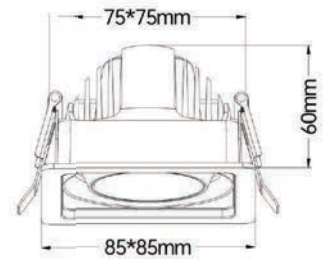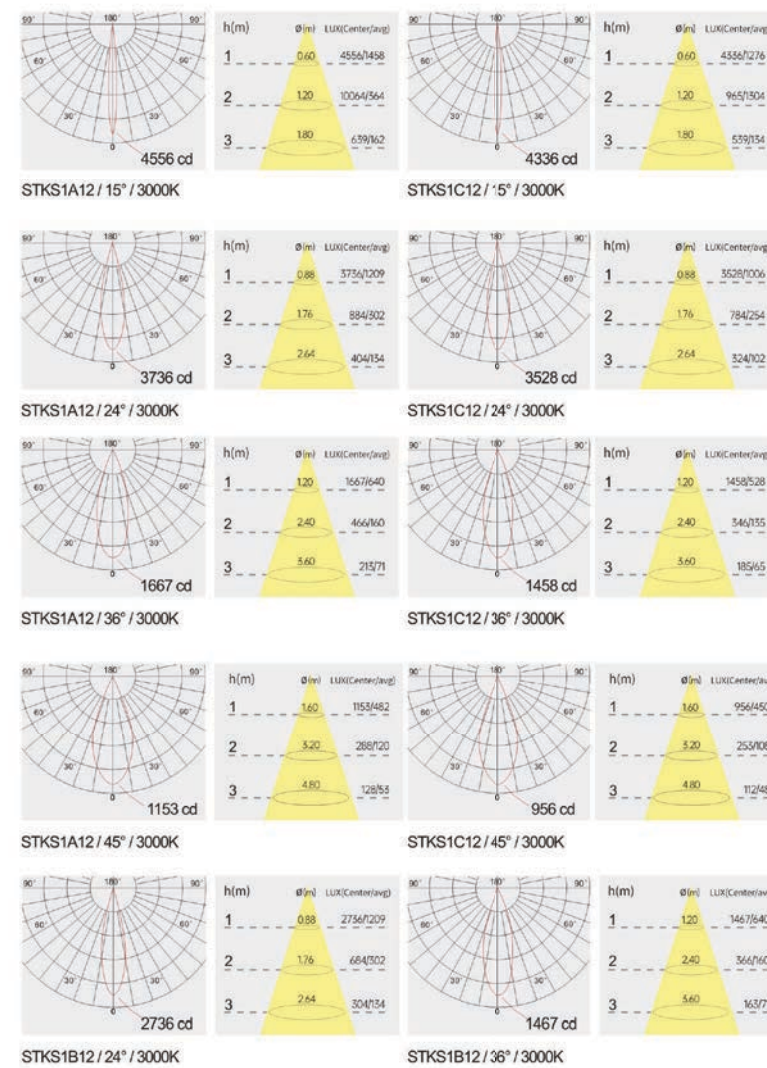

Optical fittings


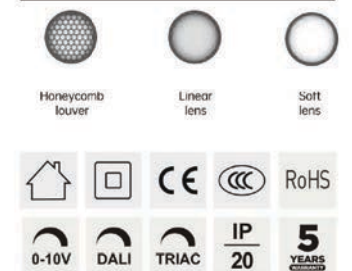




A



B

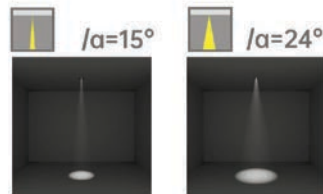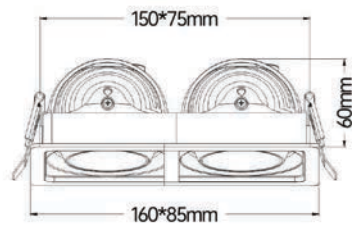


STKS2

Product code	STKS2A12	STKS2B12
Power (W)	12W*2	12W*2
Lumen (Lm)	800*2	600*2
Size (mm)	160x85xH60	160x85xH60
Cut-off (mm)	150*75	150*75
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners



Light distribution curve

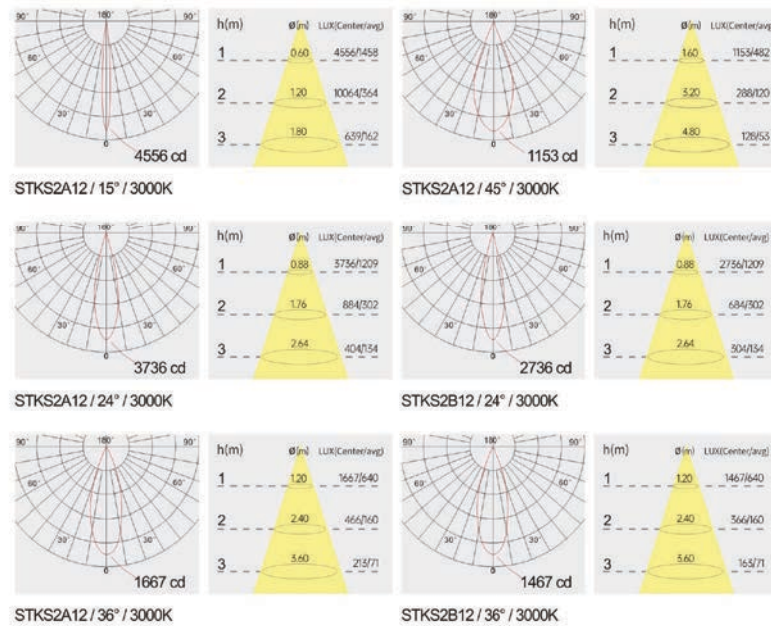


Optical fittings

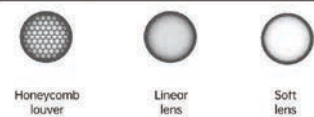

Product close-up



CCT

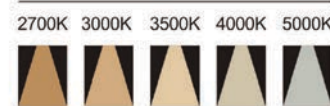


STKS2

Product code	STKS2C12	STKS2D12
Power (W)	12W*2	12W*2
Lumen (Lm)	700*2	900*2
Size (mm)	160x85xH60	160x85xH60
Cut-off (mm)	150*75	150*75
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners



Light distribution curve

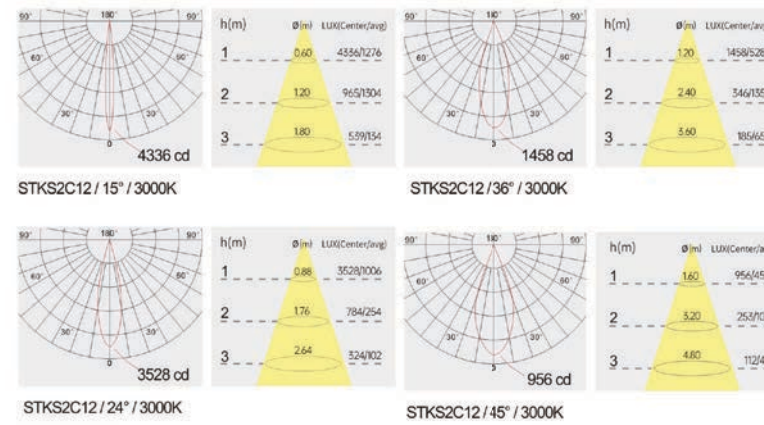


Optical fittings

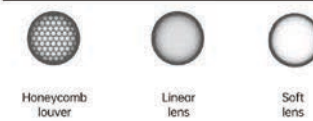

Product close-up






CCT


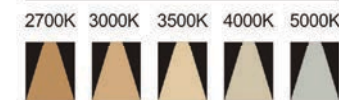


C



D

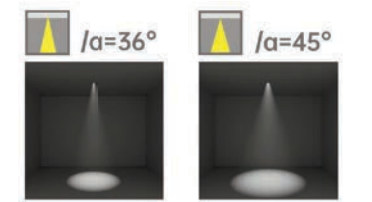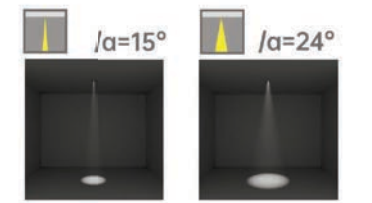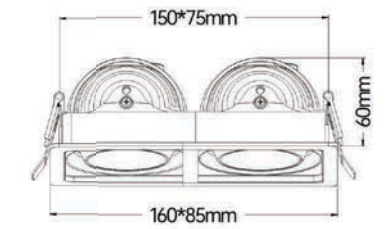

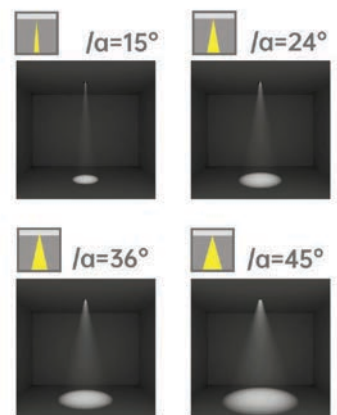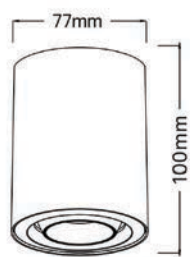

Optical fittings




Product code	STKMRA12	STKMRB12	STKMRC12	STKMRA12
Power (W)	12W	12W	12W	12W
Lumen (Lm)	800	600	700	900
Size (mm)	Ø77xH100	Ø77xH100	Ø77xH100	Ø77xH100
Voltage	220-240V / 100-277V			
PF	>0.5			
CRI	83 / 90 / 95 / Thrive			
Color	Black / White / Customized			

Strategic partners



Light distribution curve





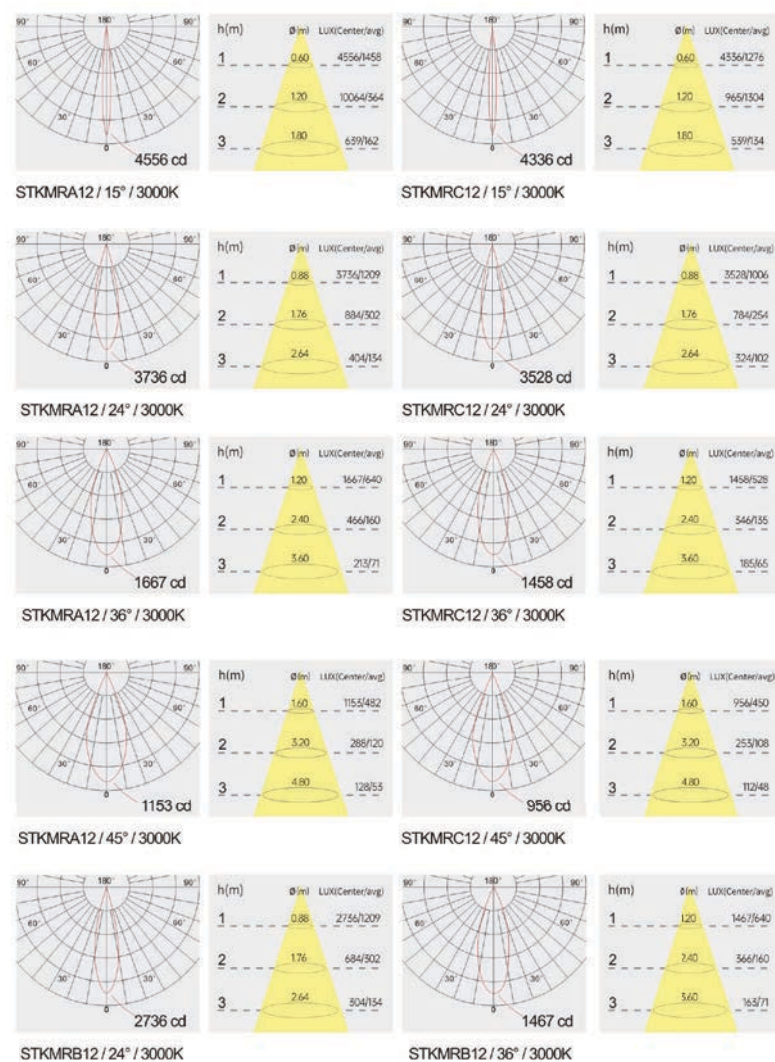


Product code	STKMSA12	STKMSB12	STKMSC12	STKMSD12
Power (W)	12W	12W	12W	12W
Lumen (Lm)	800	600	700	900
Size (mm)	Ø77x77xH100	Ø77x77xH100	Ø77x77xH100	Ø77x77xH100
Voltage	220-240V / 100-277V			
PF	>0.5			
CRI	83 / 90 / 95 / Thrive			
Color	Black / White / Customized			


Strategic partners



Light distribution curve

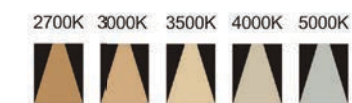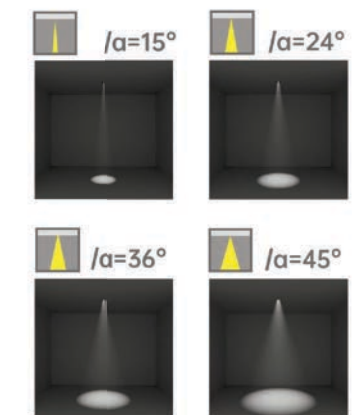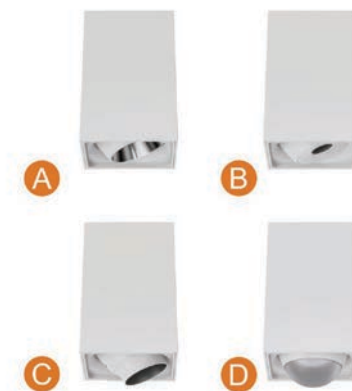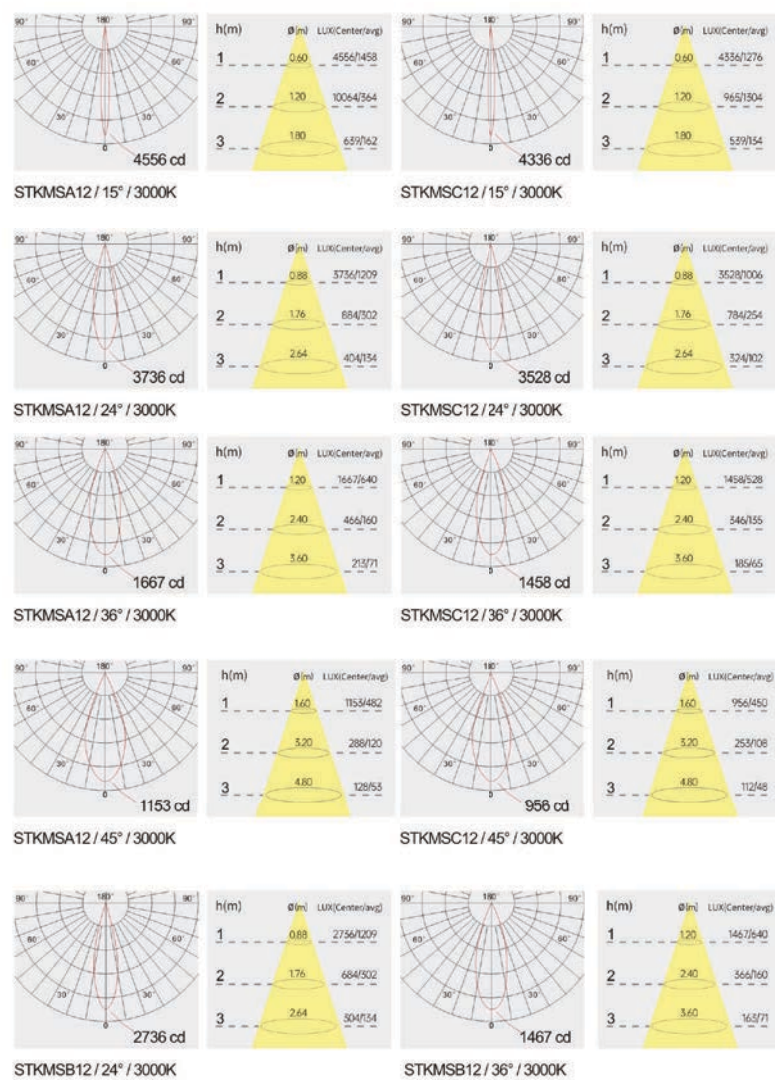

Optical fittings

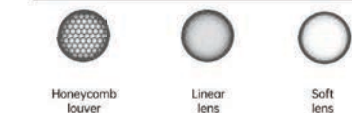





LAVENDER

Hotel & Home spot light, Deep anti-glare, multiple installation choose



Product code	MSL05506	MSL07510
Power (W)	6W	10W
Lumen (Lm)	480	800
Size (mm)	Ø65xH85	Ø85xH90
Cut-off (mm)	Ø55	Ø75
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners

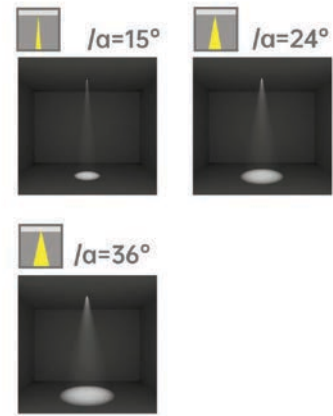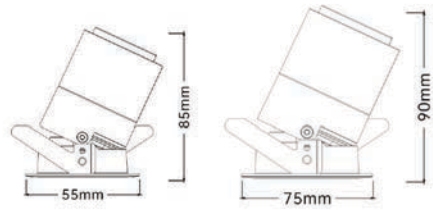



Optical fittings




Product close-up



CCT



Light distribution curve

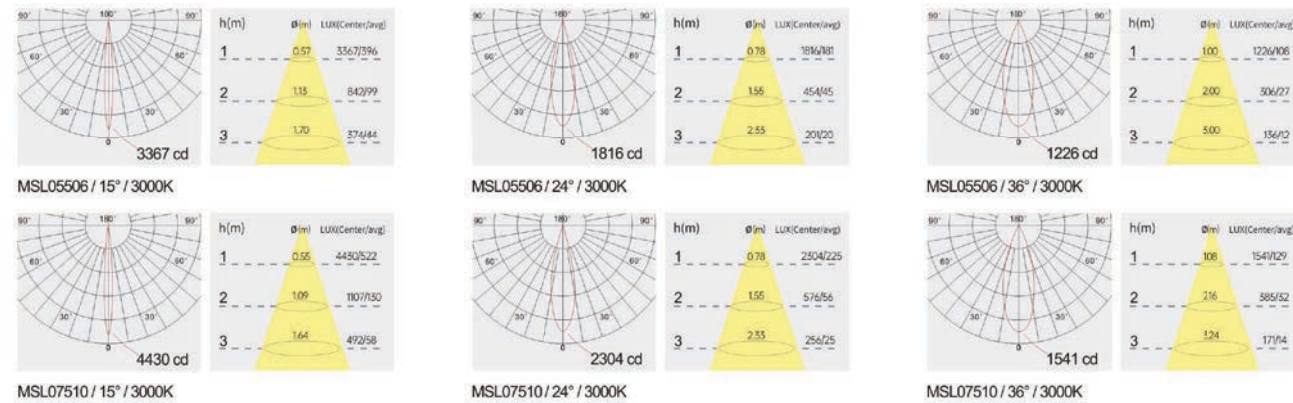




55A-N

75A-N





Product code	CB5506	CB7512
Power (W)	6W	12W
Size (mm)	Ø65xH49	Ø85xH64
Cut-off (mm)	Ø55	Ø75
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

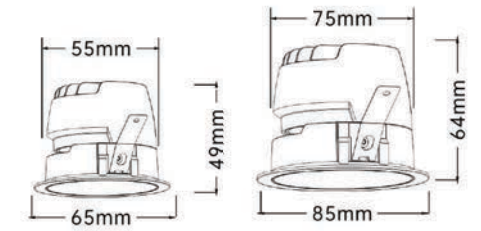


Strategic partners



Light distribution curve

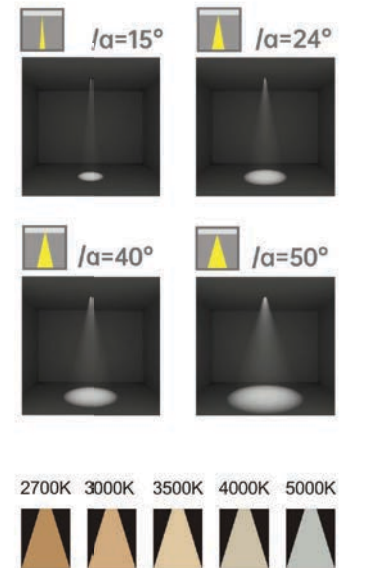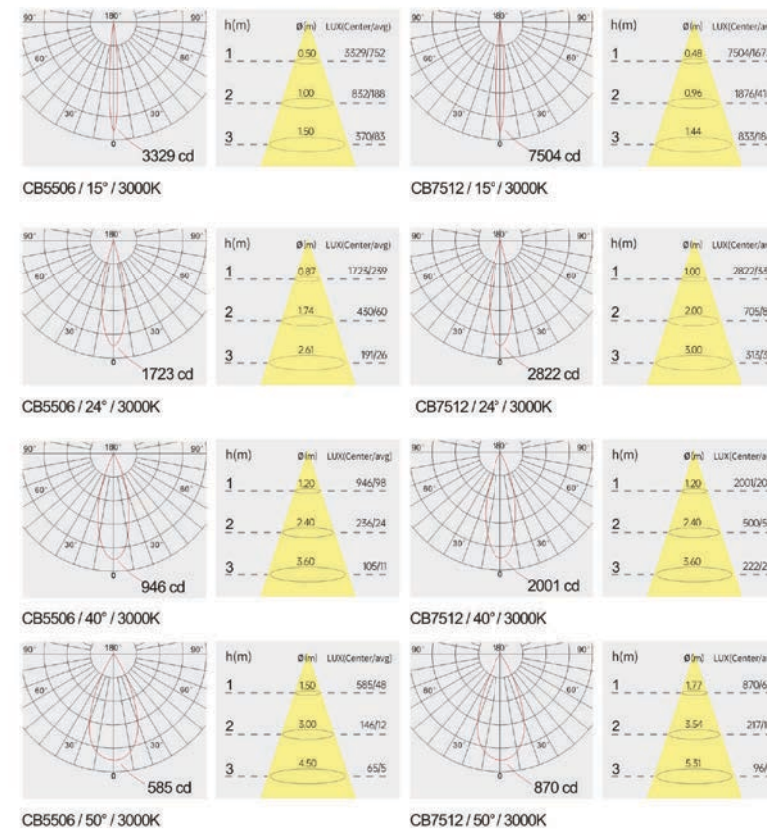

Optical fittings

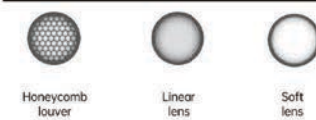

Product close-up





Product code	RMI-55	RMI-75	RMI-95
Power (W)	6W	12W	18W
Size (mm)	Ø65xH82	Ø85xH96	Ø105xH118
Cut-off (mm)	Ø55	Ø75	Ø95
Voltage	220-240V / 100-277V		
PF	>0.5 / >0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners


LED

Driver




Optical fittings




Product close-up

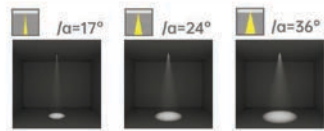

CCT

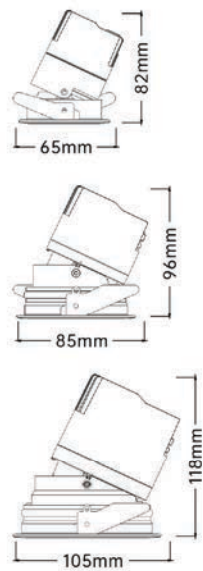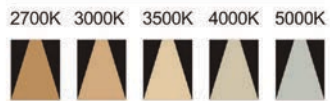

Light distribution curve

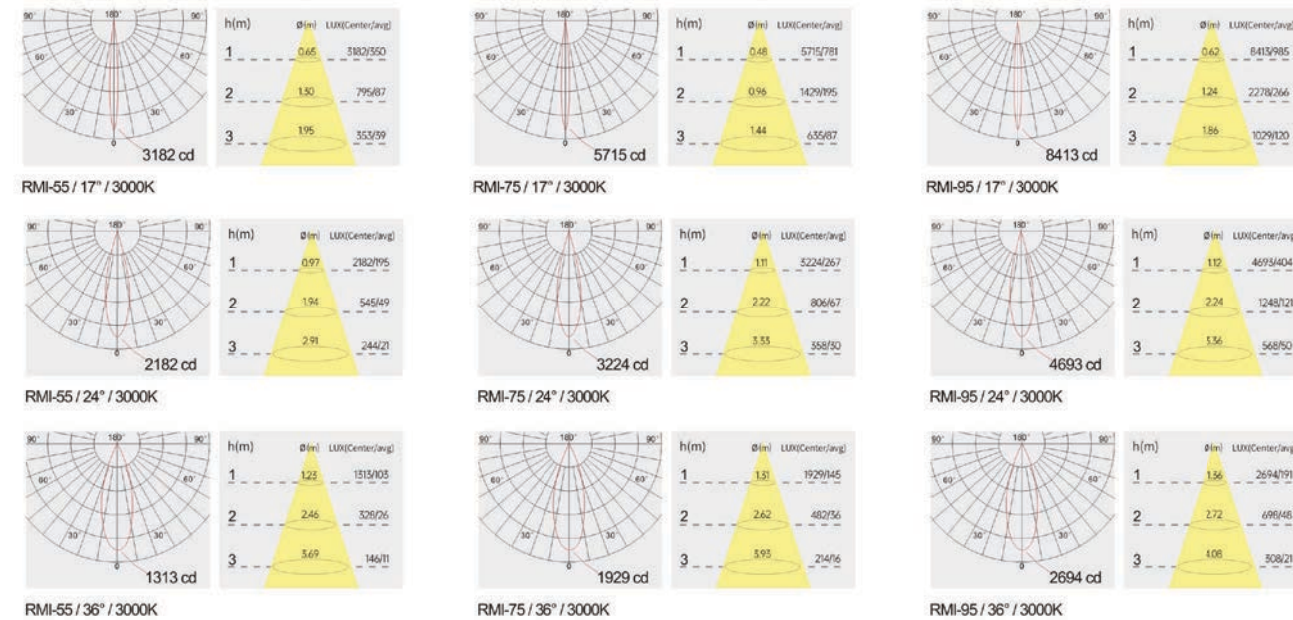

CHANGE, SO EASY

It is easy to disassemble and assemble, and can be changed the light source module according to different lighting needs.

In the same space, it can also meet the needs of lighting efficiency by replacing the corresponding light source module without re-opening the hole.






Product code	RMI-125	RMI-150
Power (W)	24W	35W
Size (mm)	Ø135xH148	Ø160xH176
Cut-off (mm)	Ø125	Ø150
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners



Light distribution curve

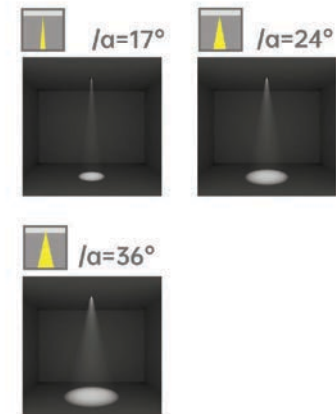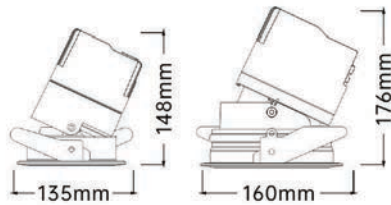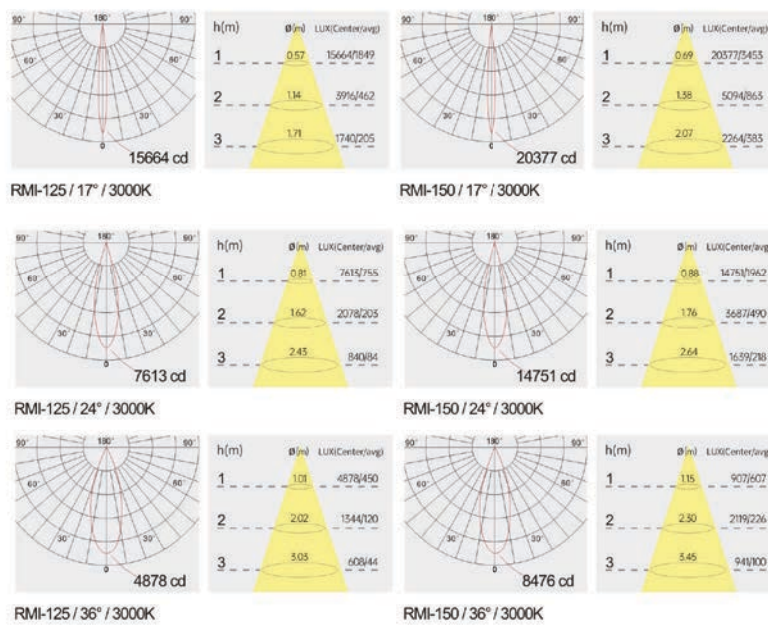

Optical fittings

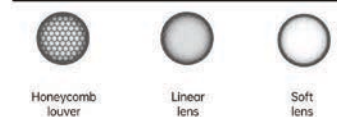

Product close-up



SYSTEM HEAT DISSIPATION

High thermal conductivity material, open style heat sink, to speed up the air convection, Successfully combine with a good heat dissipation.





Product code	SLN50R06A	SLN55R06A	SLN75R12A
Power (W)	6W	6W	12W
Lumen (Lm)	350	450	800
Size (mm)	Ø60*H78	Ø63*H78	Ø86*H99
Cut-off (mm)	Ø50	Ø55	Ø75
Voltage	220-240V / 100-277V		
PF	>0.5		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		


Strategic partners






Optical fittings




Product close-up



CCT

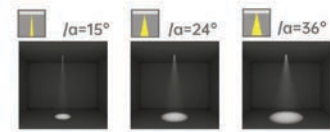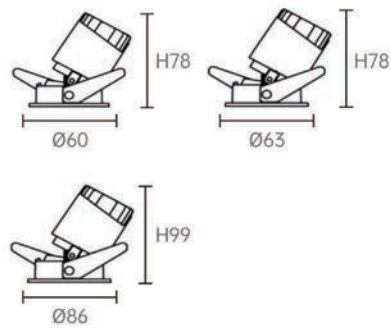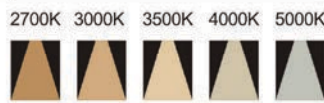

Light distribution curve

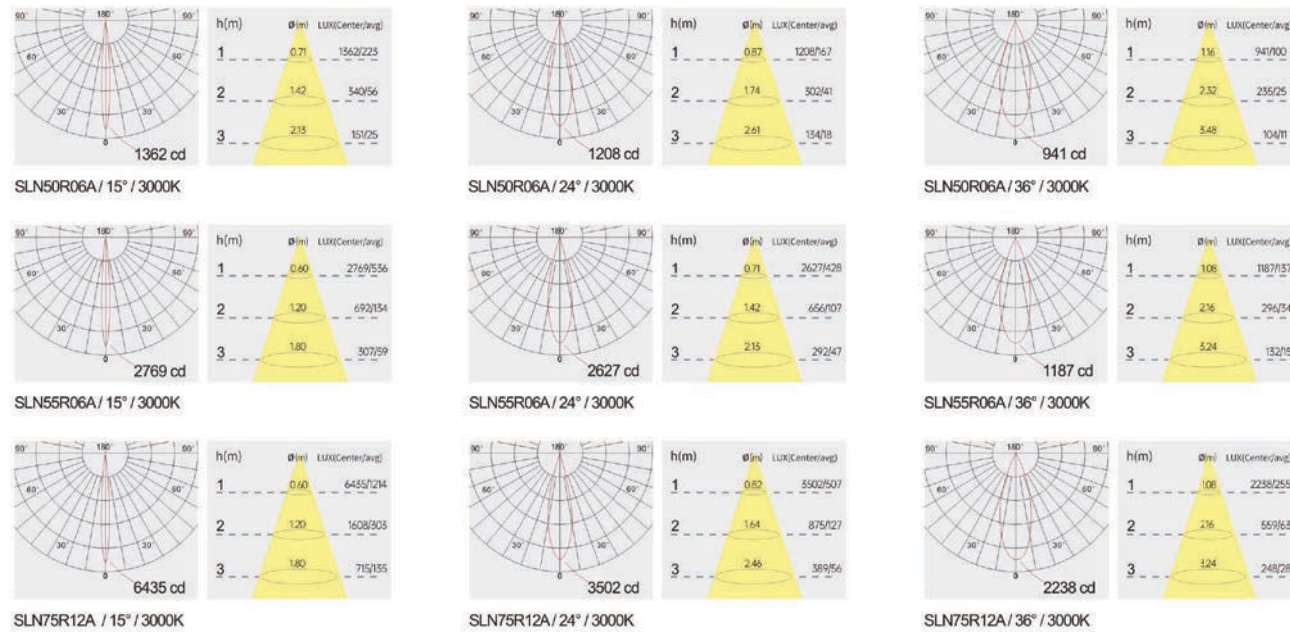


Product code	SLN95R20A	SLN120R30A
Power (W)	20W	30W
Lumen (Lm)	1800	2600
Size (mm)	Ø106*H125	Ø106*H149
Cut-off (mm)	Ø95	Ø120
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners






Optical fittings




Product close-up



CCT

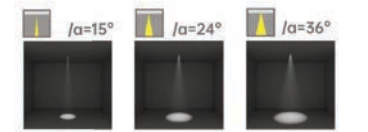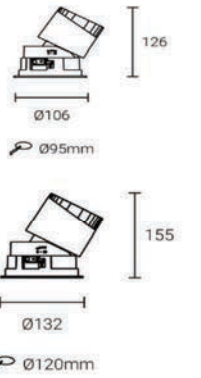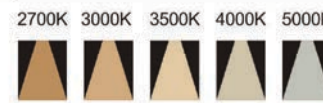

Light distribution curve



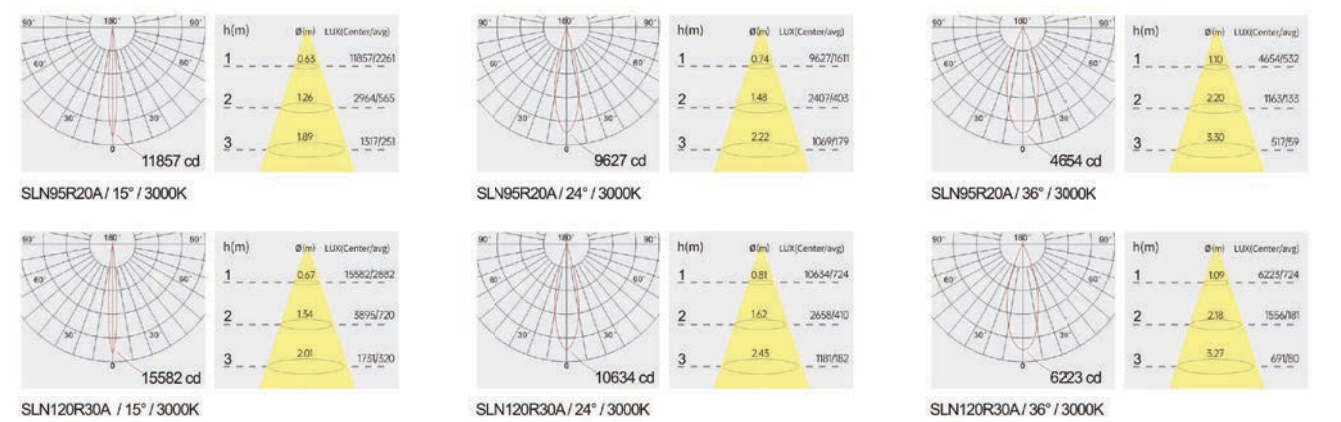


SLN




Product code	SLN52R06TA	SLN75R12TA
Power (W)	6W	12W
Lumen (Lm)	450	800
Size (mm)	Ø107*H78	Ø134*H99
Cut-off (mm)	Ø52	Ø75
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners

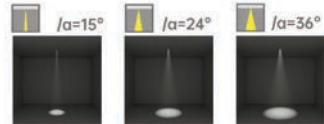


Optical fittings

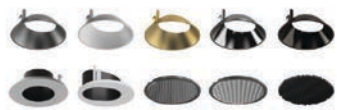


Product close-up



CCT

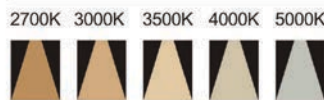

Light distribution curve


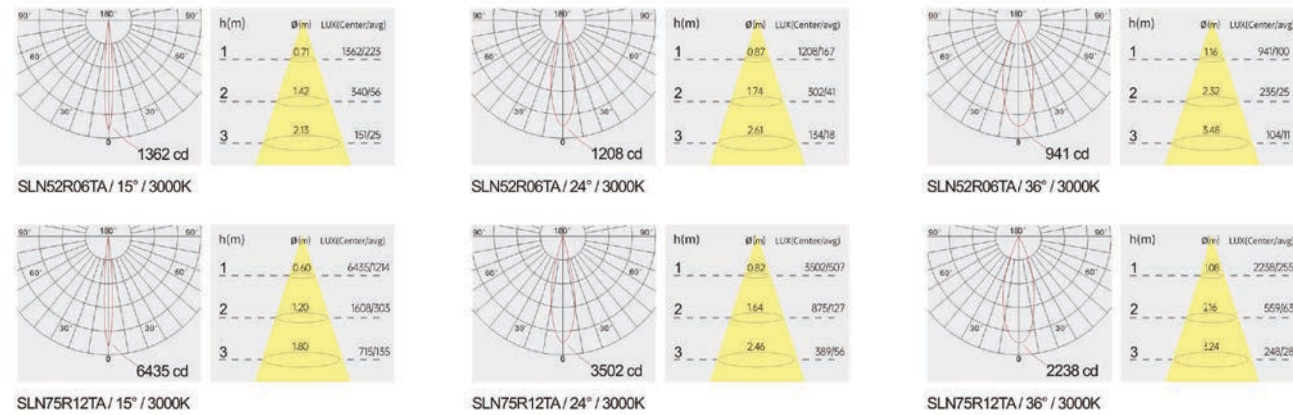


SLN



Product code	SLN95R20TA	SLN120R30TA
Power (W)	20W	30W
Lumen (Lm)	1800	2600
Size (mm)	Ø162*H125	Ø185*H140
Cut-off (mm)	Ø95	Ø120
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners

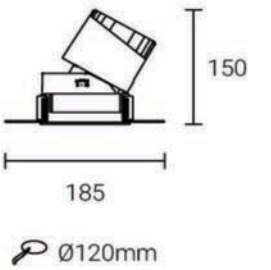


Optical fittings




Product close-up




CCT

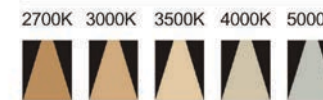




Light distribution curve

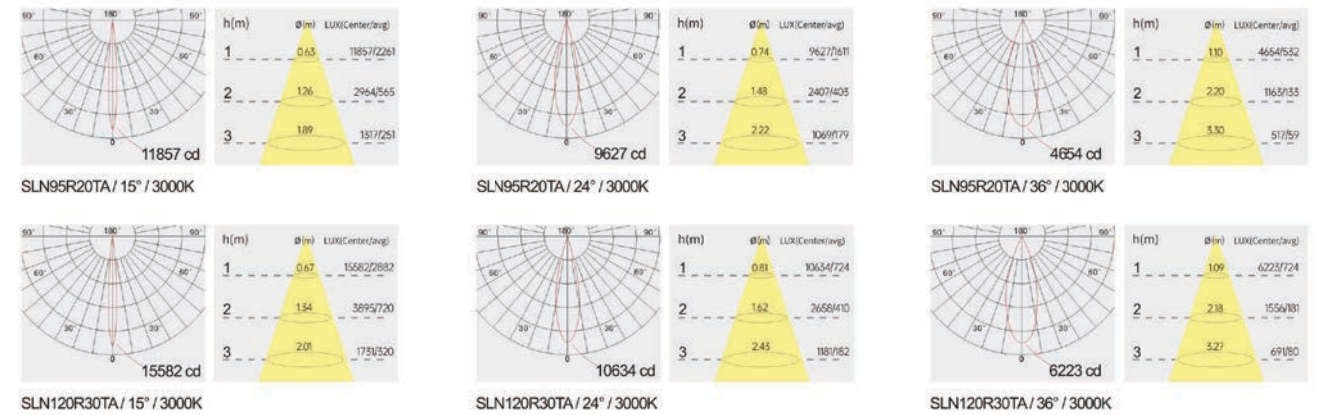



EVERYTHING

SLN

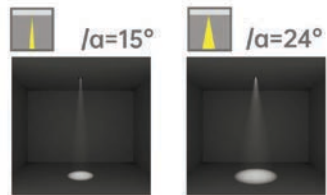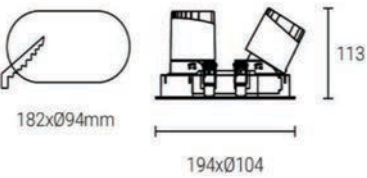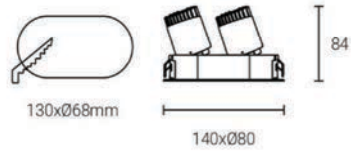


Product code	SLN55R206A	SLN75R212A
Power (W)	6W*2	12W*2
Lumen (Lm)	450*2	800*2
Size (mm)	Ø140*80*H84	Ø194*104*H108
Cut-off (mm)	Ø130*70	Ø182*92
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners




Optical fittings

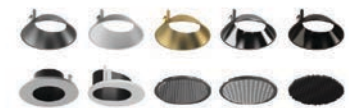


Product close-up



CCT

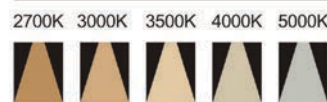

Light distribution curve

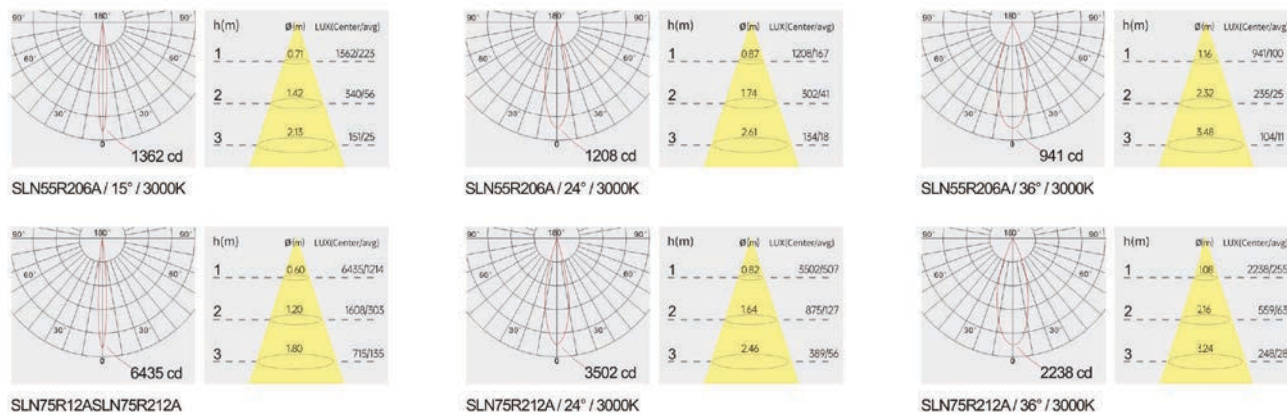


SLN

Product code	SLN95R220A	SLN120R230A
Power (W)	20W*2	30W*2
Lumen (Lm)	1800*2	2600*2
Size (mm)	Ø240*126*H130	Ø298*153*H161
Cut-off (mm)	Ø226*113	Ø282*138
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners



Optical fittings

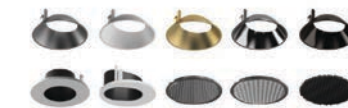


Product close-up




CCT



Light distribution curve

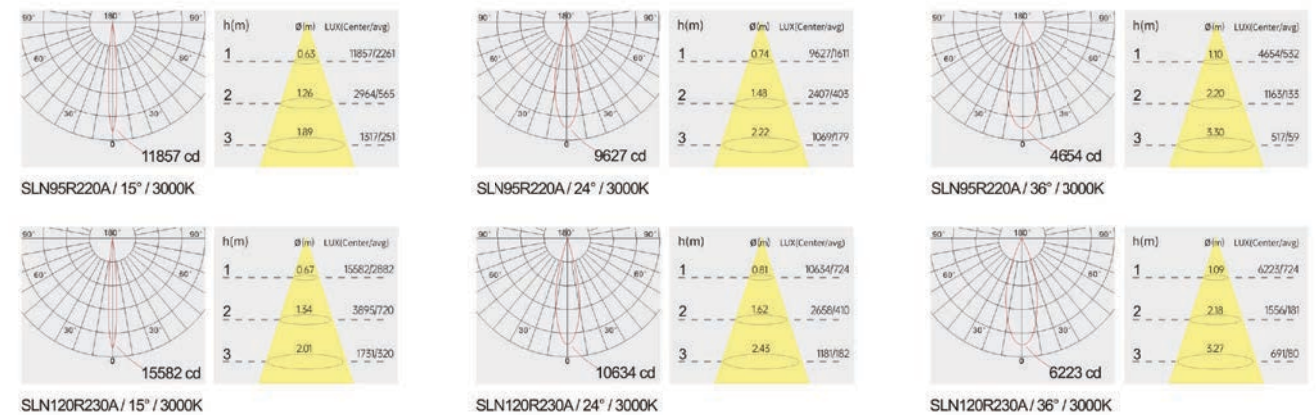

SLN

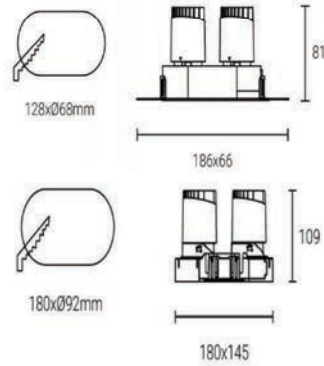


Product code	SLN55R206TA	SLN75R212TA
Power (W)	6W*2	12W*2
Lumen (Lm)	450*2	800*2
Size (mm)	Ø174*70*H84	Ø246*89*H113
Cut-off (mm)	Ø130*70	Ø182*92
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners





Optical fittings

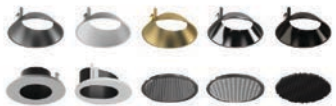


Product close-up




CCT

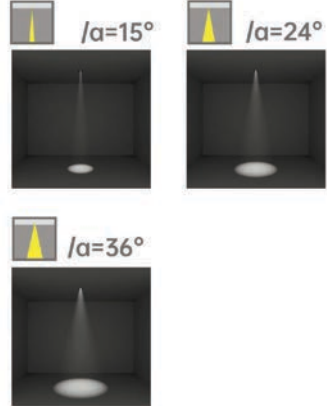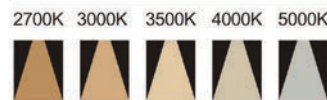

Light distribution curve

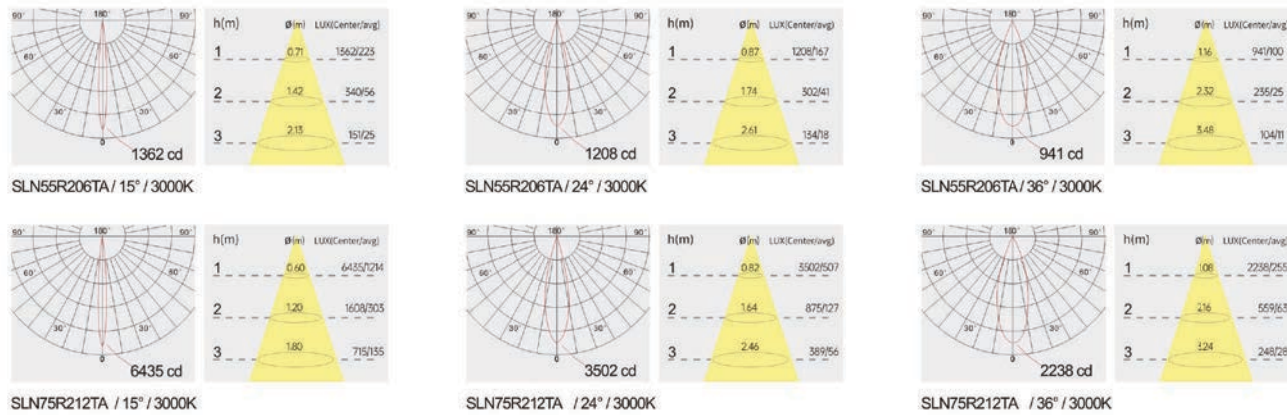

SLN

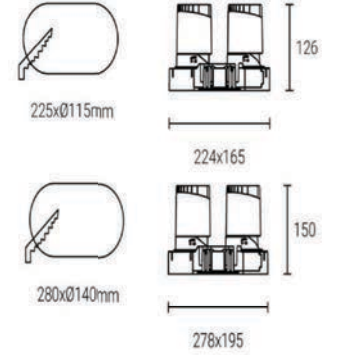


Product code	SLN95R220TA	SLN120R230TA
Power (W)	20W*2	30W*2
Lumen (Lm)	1800*2	2600*2
Size (mm)	Ø293*108*H131	Ø351*133*H161
Cut-off (mm)	Ø226*113	Ø282*138
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners




Optical fittings

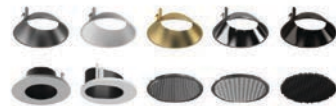


Product close-up






CCT

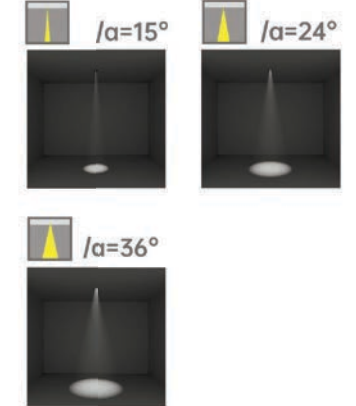

Light distribution curve

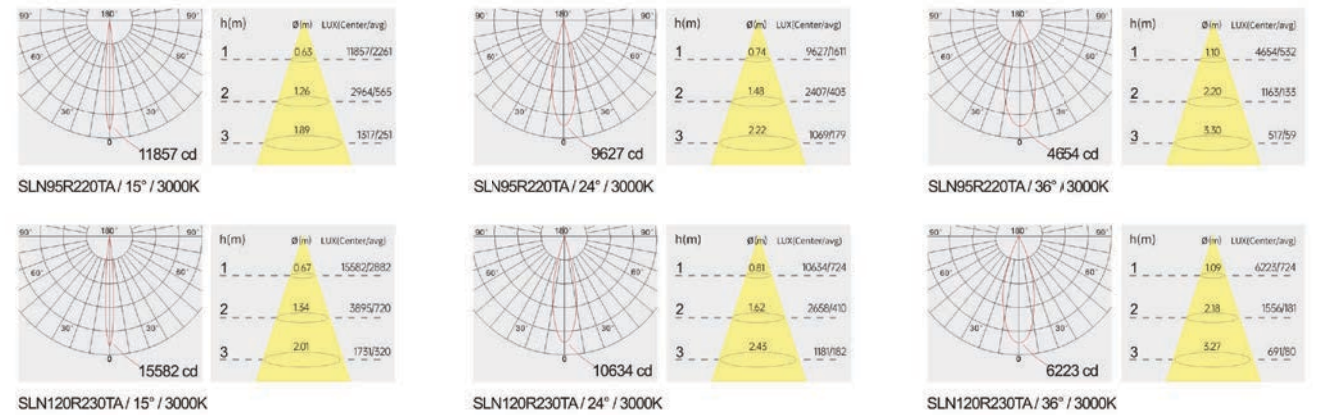

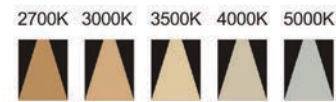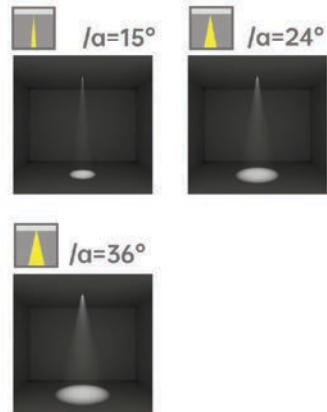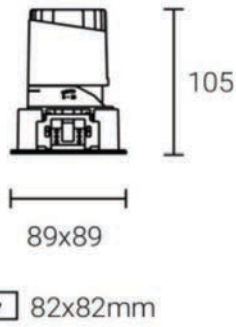


SLN

Product code	SLN82S12A	SLN82S12TA
Power (W)	12W	12W
Lumen (Lm)	800	800
Size (mm)	89*89*H105	131*78*H110
Cut-off (mm)	82*82	82*82
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners




Light distribution curve

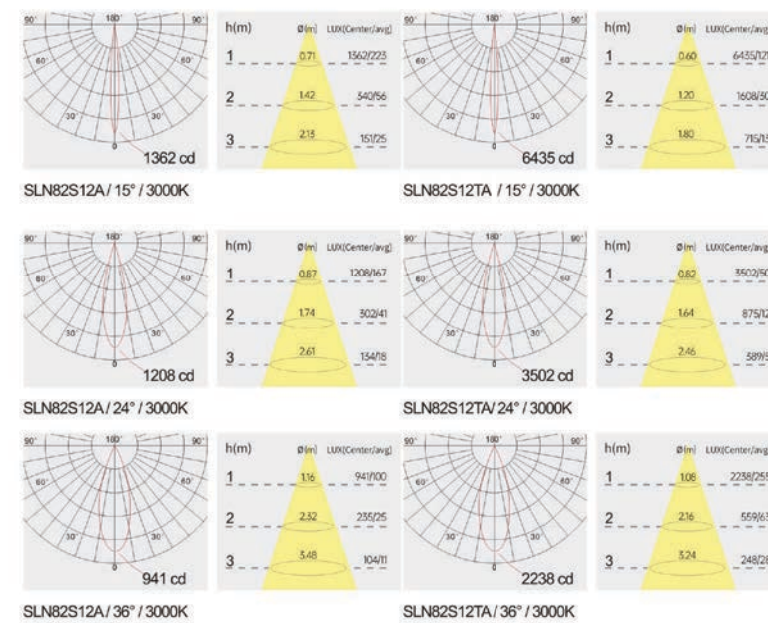

Optical fittings



Product close-up




SLN

Product code	SLN82S212A	SLN82S212TA
Power (W)	12W*2	12W*2
Lumen (Lm)	800*2	800*2
Size (mm)	165*85*H80	153*82*H110
Cut-off (mm)	154*82.5	154*82.5
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners








Light distribution curve

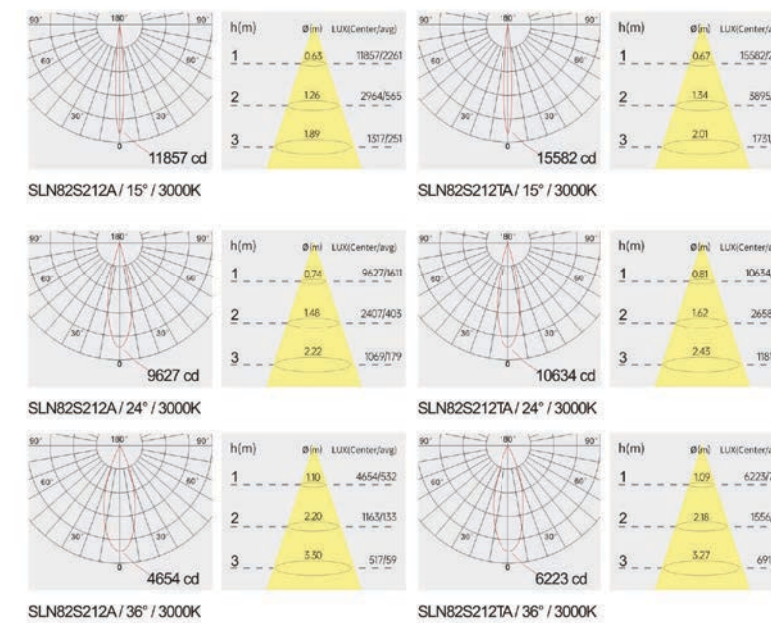


Optical fittings



Product close-up

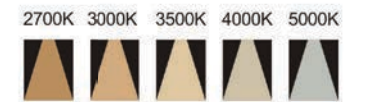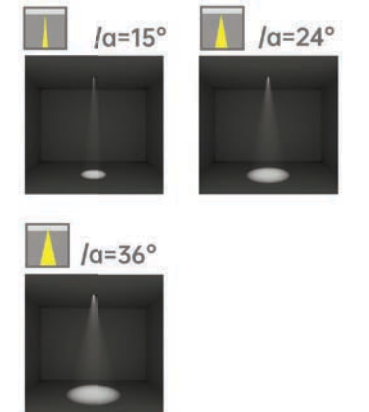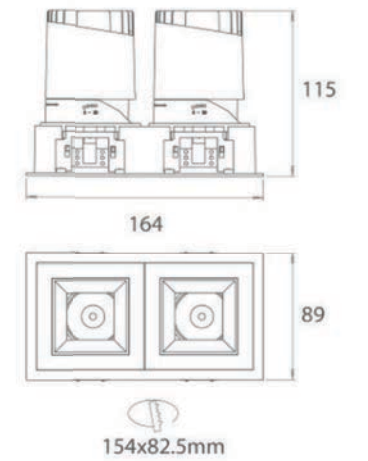

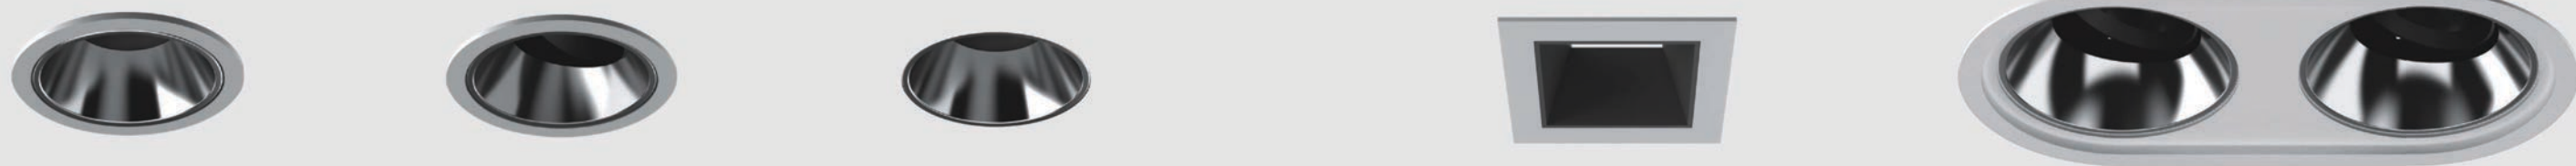

MOUNTING STRUCTURE






MR16-S1A




MR16-S1B



MR16-S2A




MR16-S2B



MR16-S1AT




MR16-S1BT



MR16-S2AT



MR16-S2BT



GENIE




SL-091



SL-092

hot w

silux

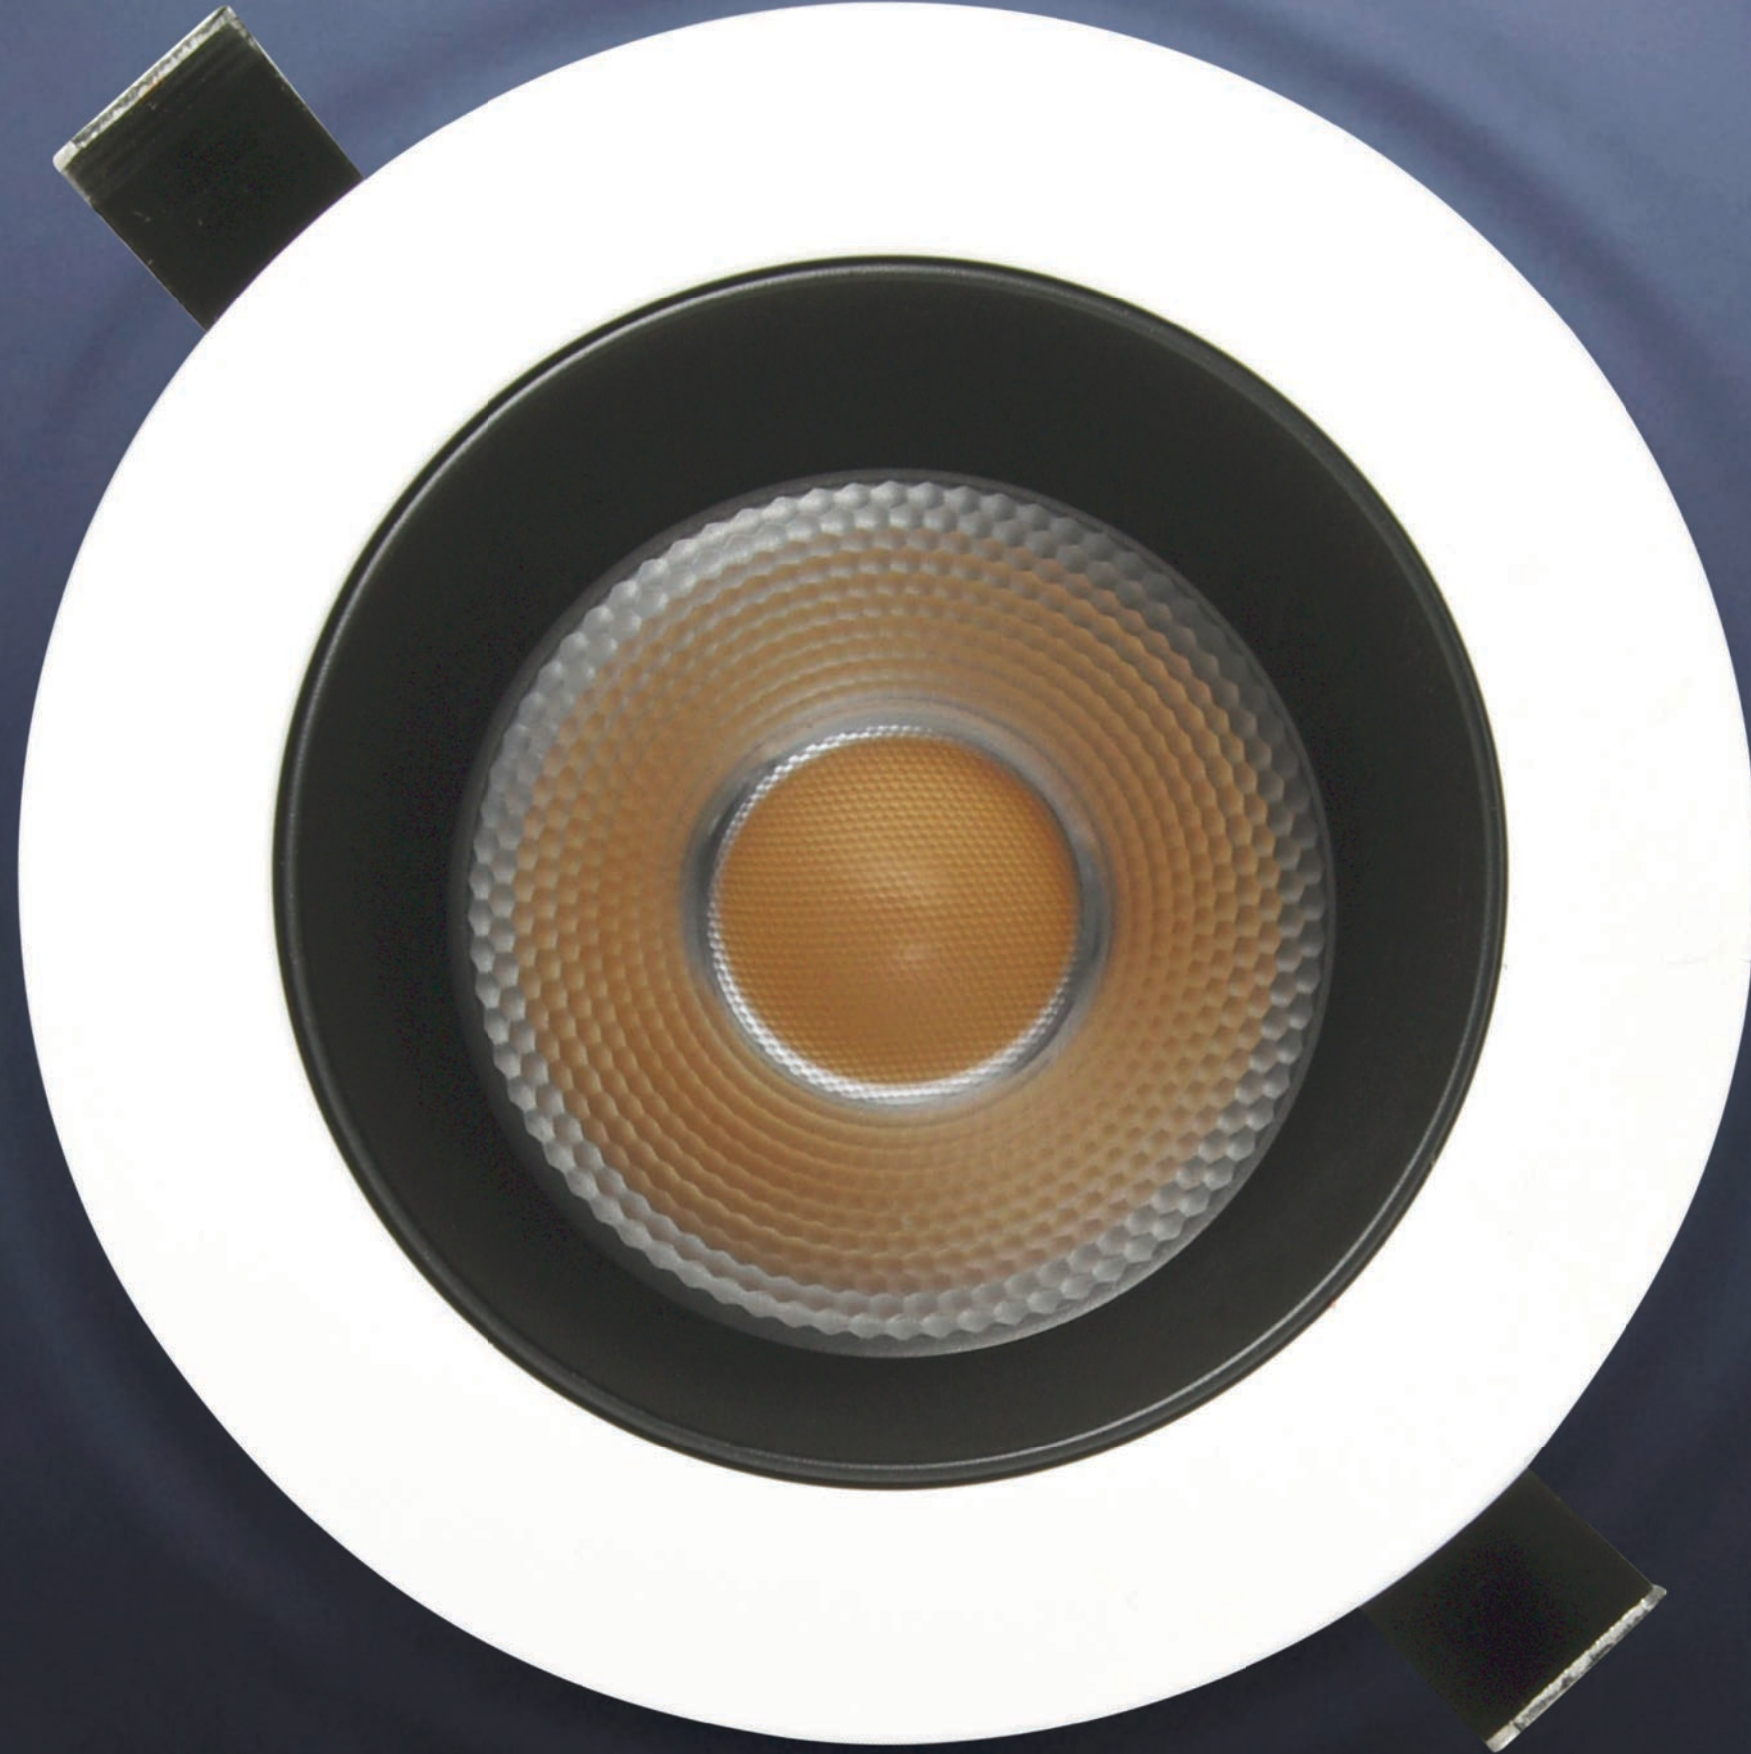

SMART

Pinhole STL spot light,
cabinet application
Smart and exquisite


SLT

Product code	SLT25	SLT30
Power (W)	2W	3W
Lumen (Lm)	60	150
Size (mm)	Ø32xH50	Ø38xH39
Cut-off (mm)	Ø27	Ø30
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners






Light distribution curve

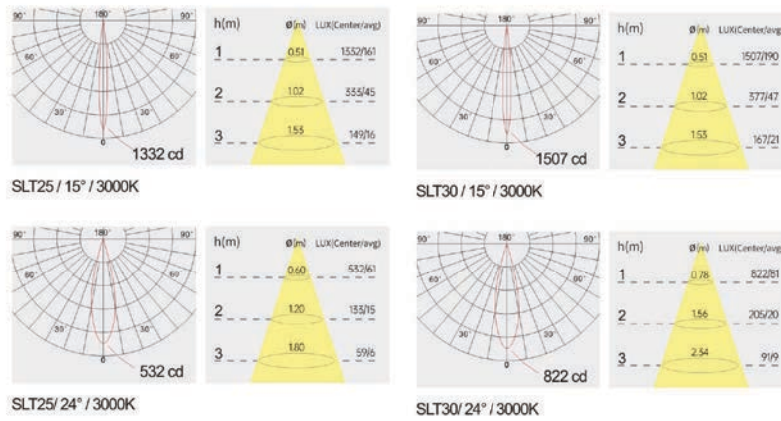

Optical fittings



Product close-up

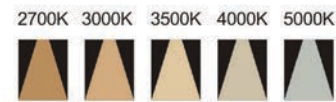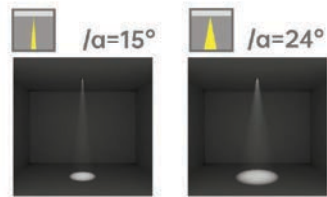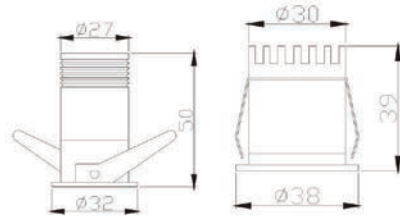

SLT

Product code	SLT40	SLT50	SLT60
Power (W)	5W	7W	9W
Lumen (Lm)	280	400	500
Size (mm)	Ø45xH51	Ø57xH67	Ø70xH79
Cut-off (mm)	Ø40	Ø50	Ø60
Voltage	220-240V / 100-277V		
PF	>0.5		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners



Optical fittings




Product close-up



CCT





Light distribution curve

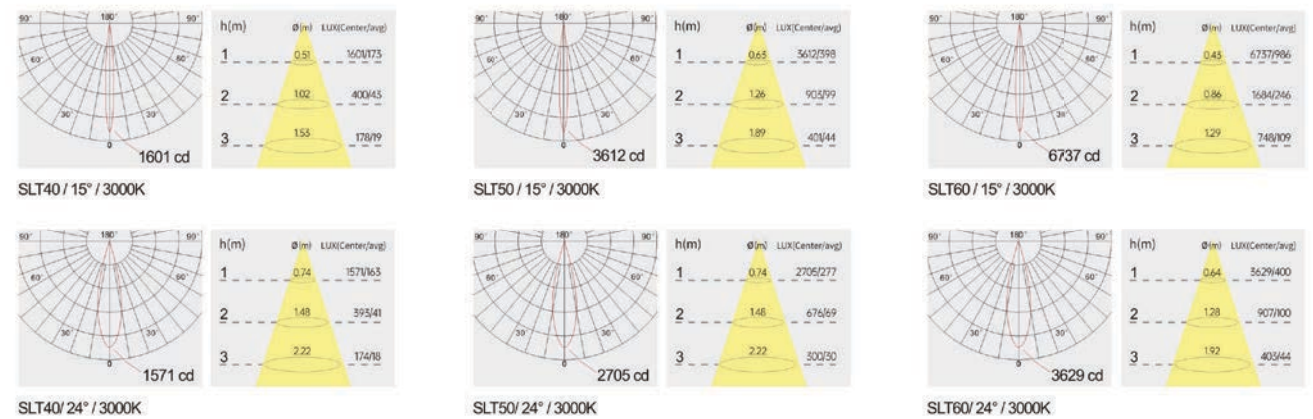

Optical fittings







Product close-up

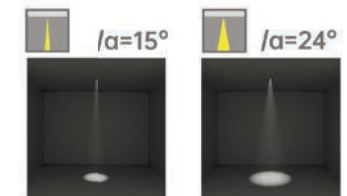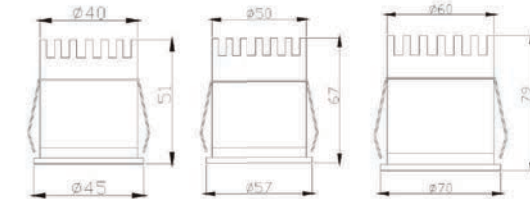

ARK

Ark SLK surface mounted elegant spot light,
Home & Hotel application



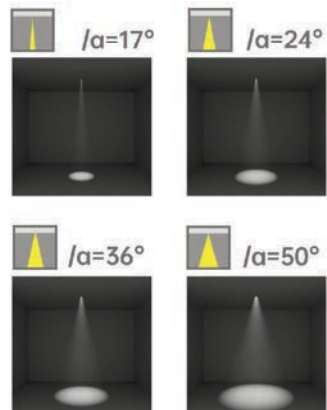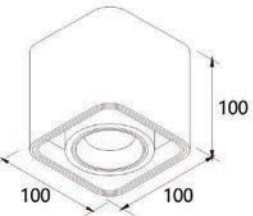


SLK

Product code	SLKS106	SLKS112
Power (W)	6W	12W
Lumen (Lm)	500	950
Size (mm)	75x75x70	100x100x100
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customizec	

Strategic partners



Light distribution curve

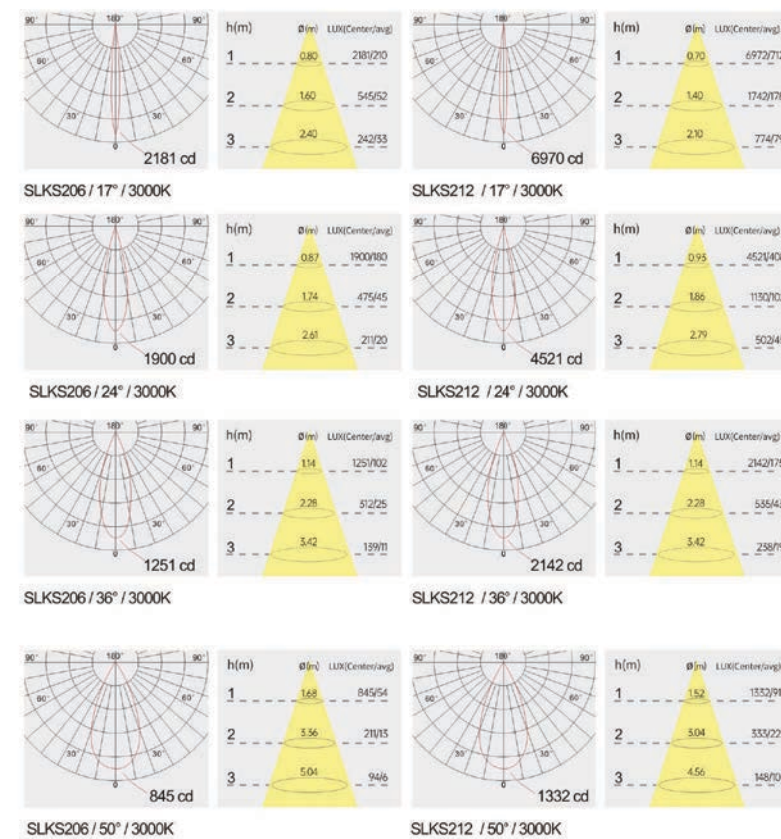

Optical fittings



Product close-up




SLK

Product code	SLKS206	SLKS212
Power (W)	6W*2	12W*2
Lumen (Lm)	500*2	950*2
Size (mm)	145x75x70	195x100x100
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners








Light distribution curve




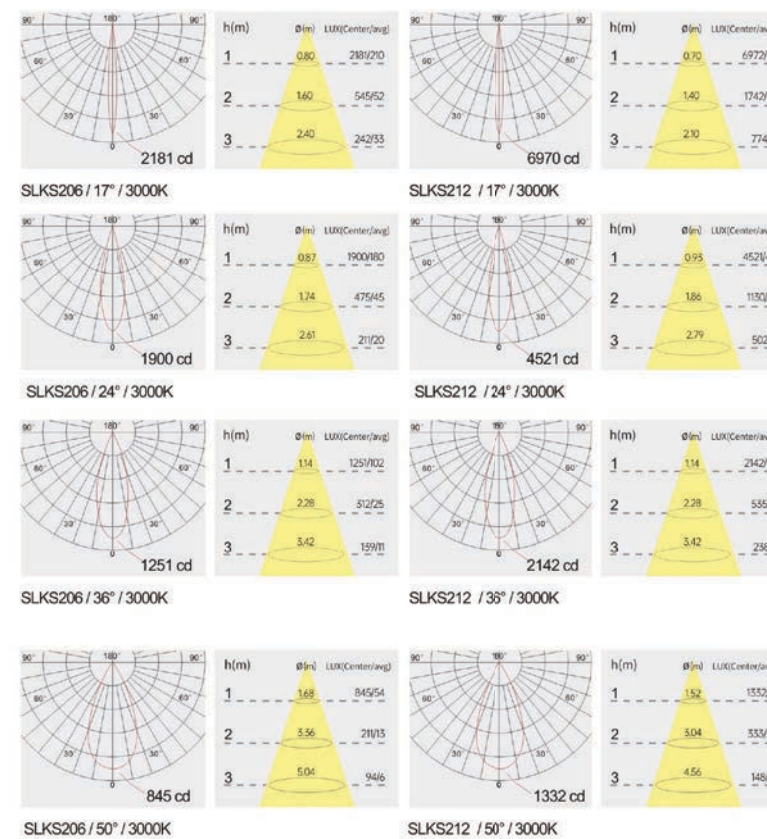


Optical fittings



Product close-up

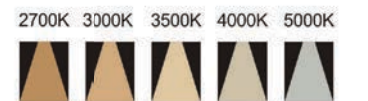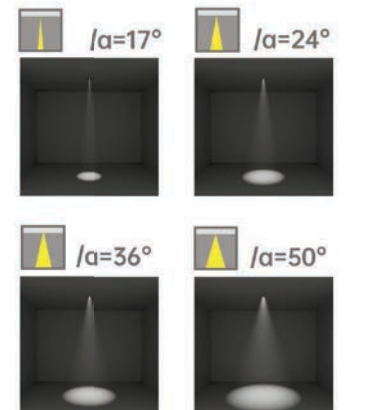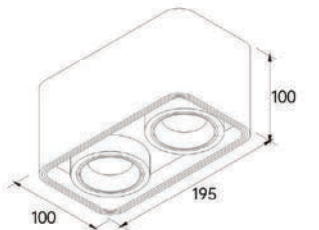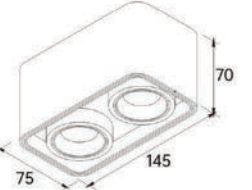

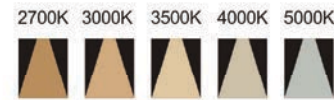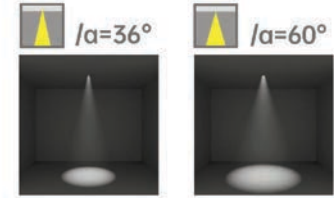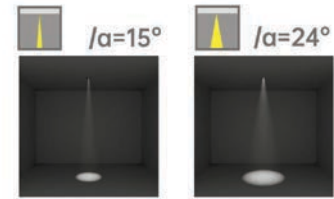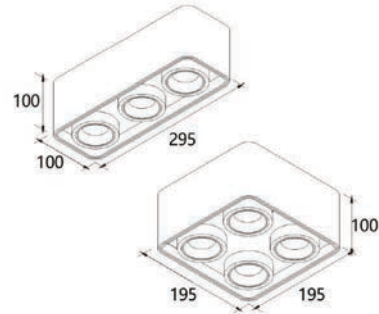


SLK

Product code	SLKS312	SLKS412
Power (W)	12W*3	12W*4
Lumen (Lm)	950*3	950*4
Size (mm)	295x100x100	195x195x120
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners



Light distribution curve

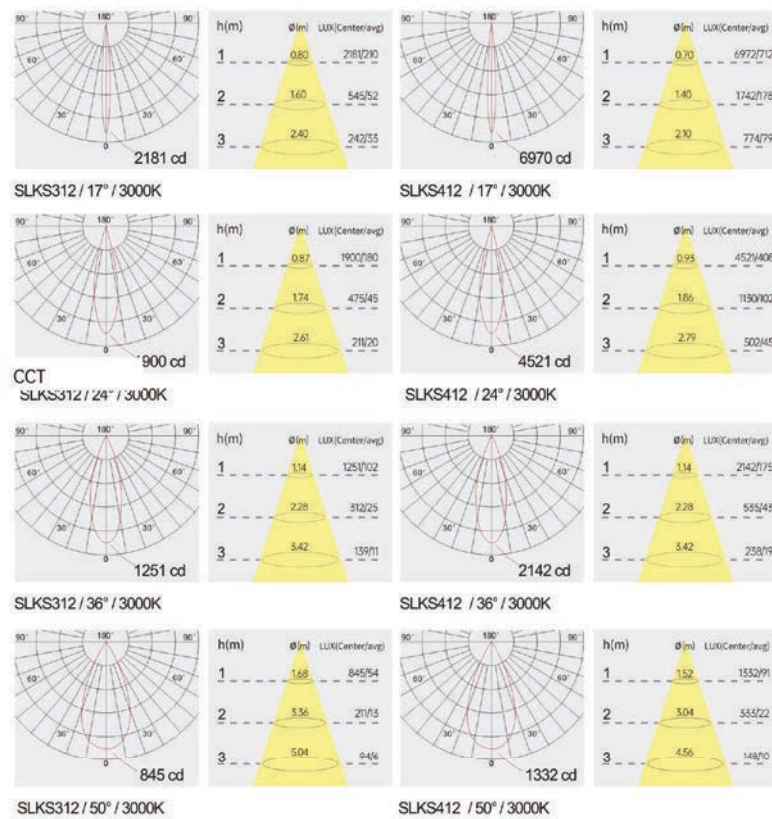

Optical fittings



Product close-up




SLK

Product code	SLKR106	SLKR112
Power (W)	6W	12W
Lumen (Lm)	500	950
Size (mm)	Ø70x70	Ø100x100
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners







Light distribution curve

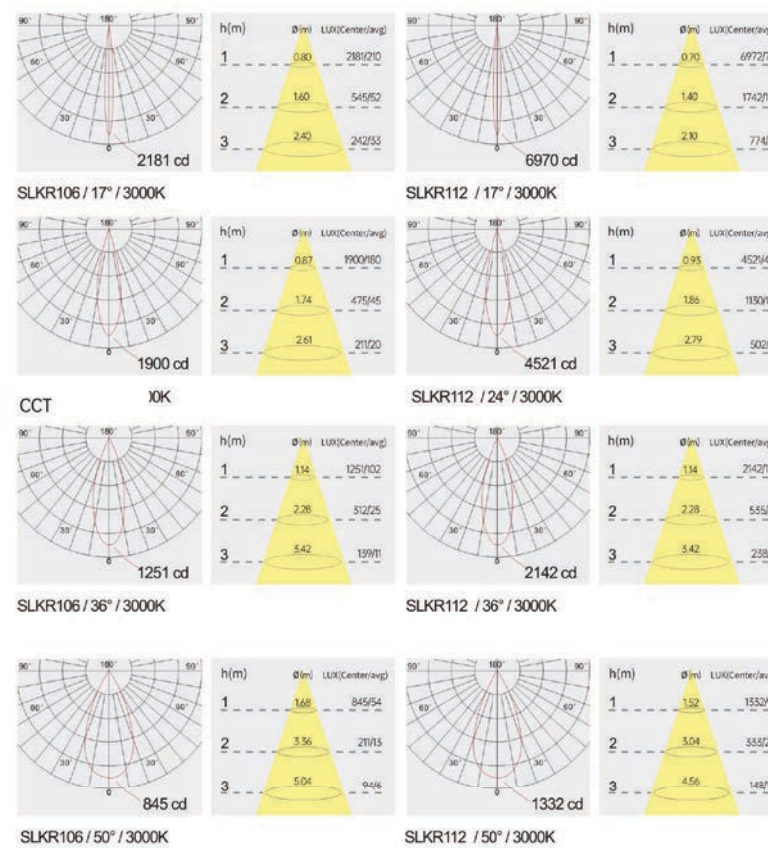

Optical fittings



Product close-up

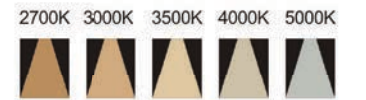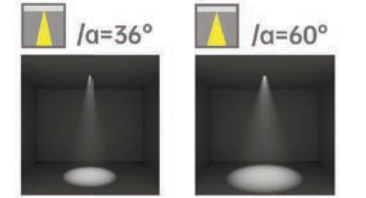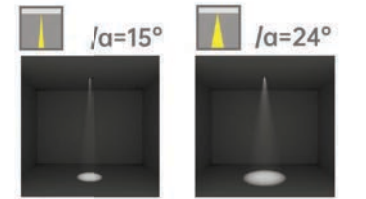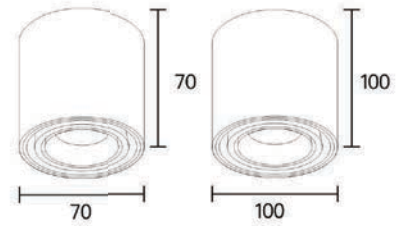





FOUR POINTS
BY SHERATON

FOUR POINTS
BY SHERATON

silux


VIOLET

Stretchable spotlight,
Flexible application, Smooth pull feeling

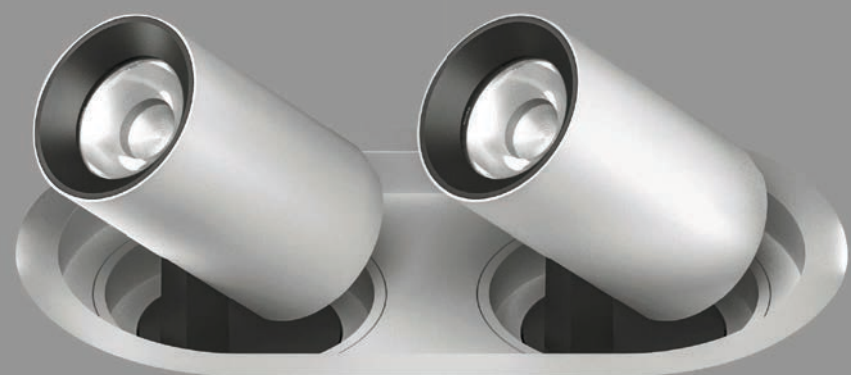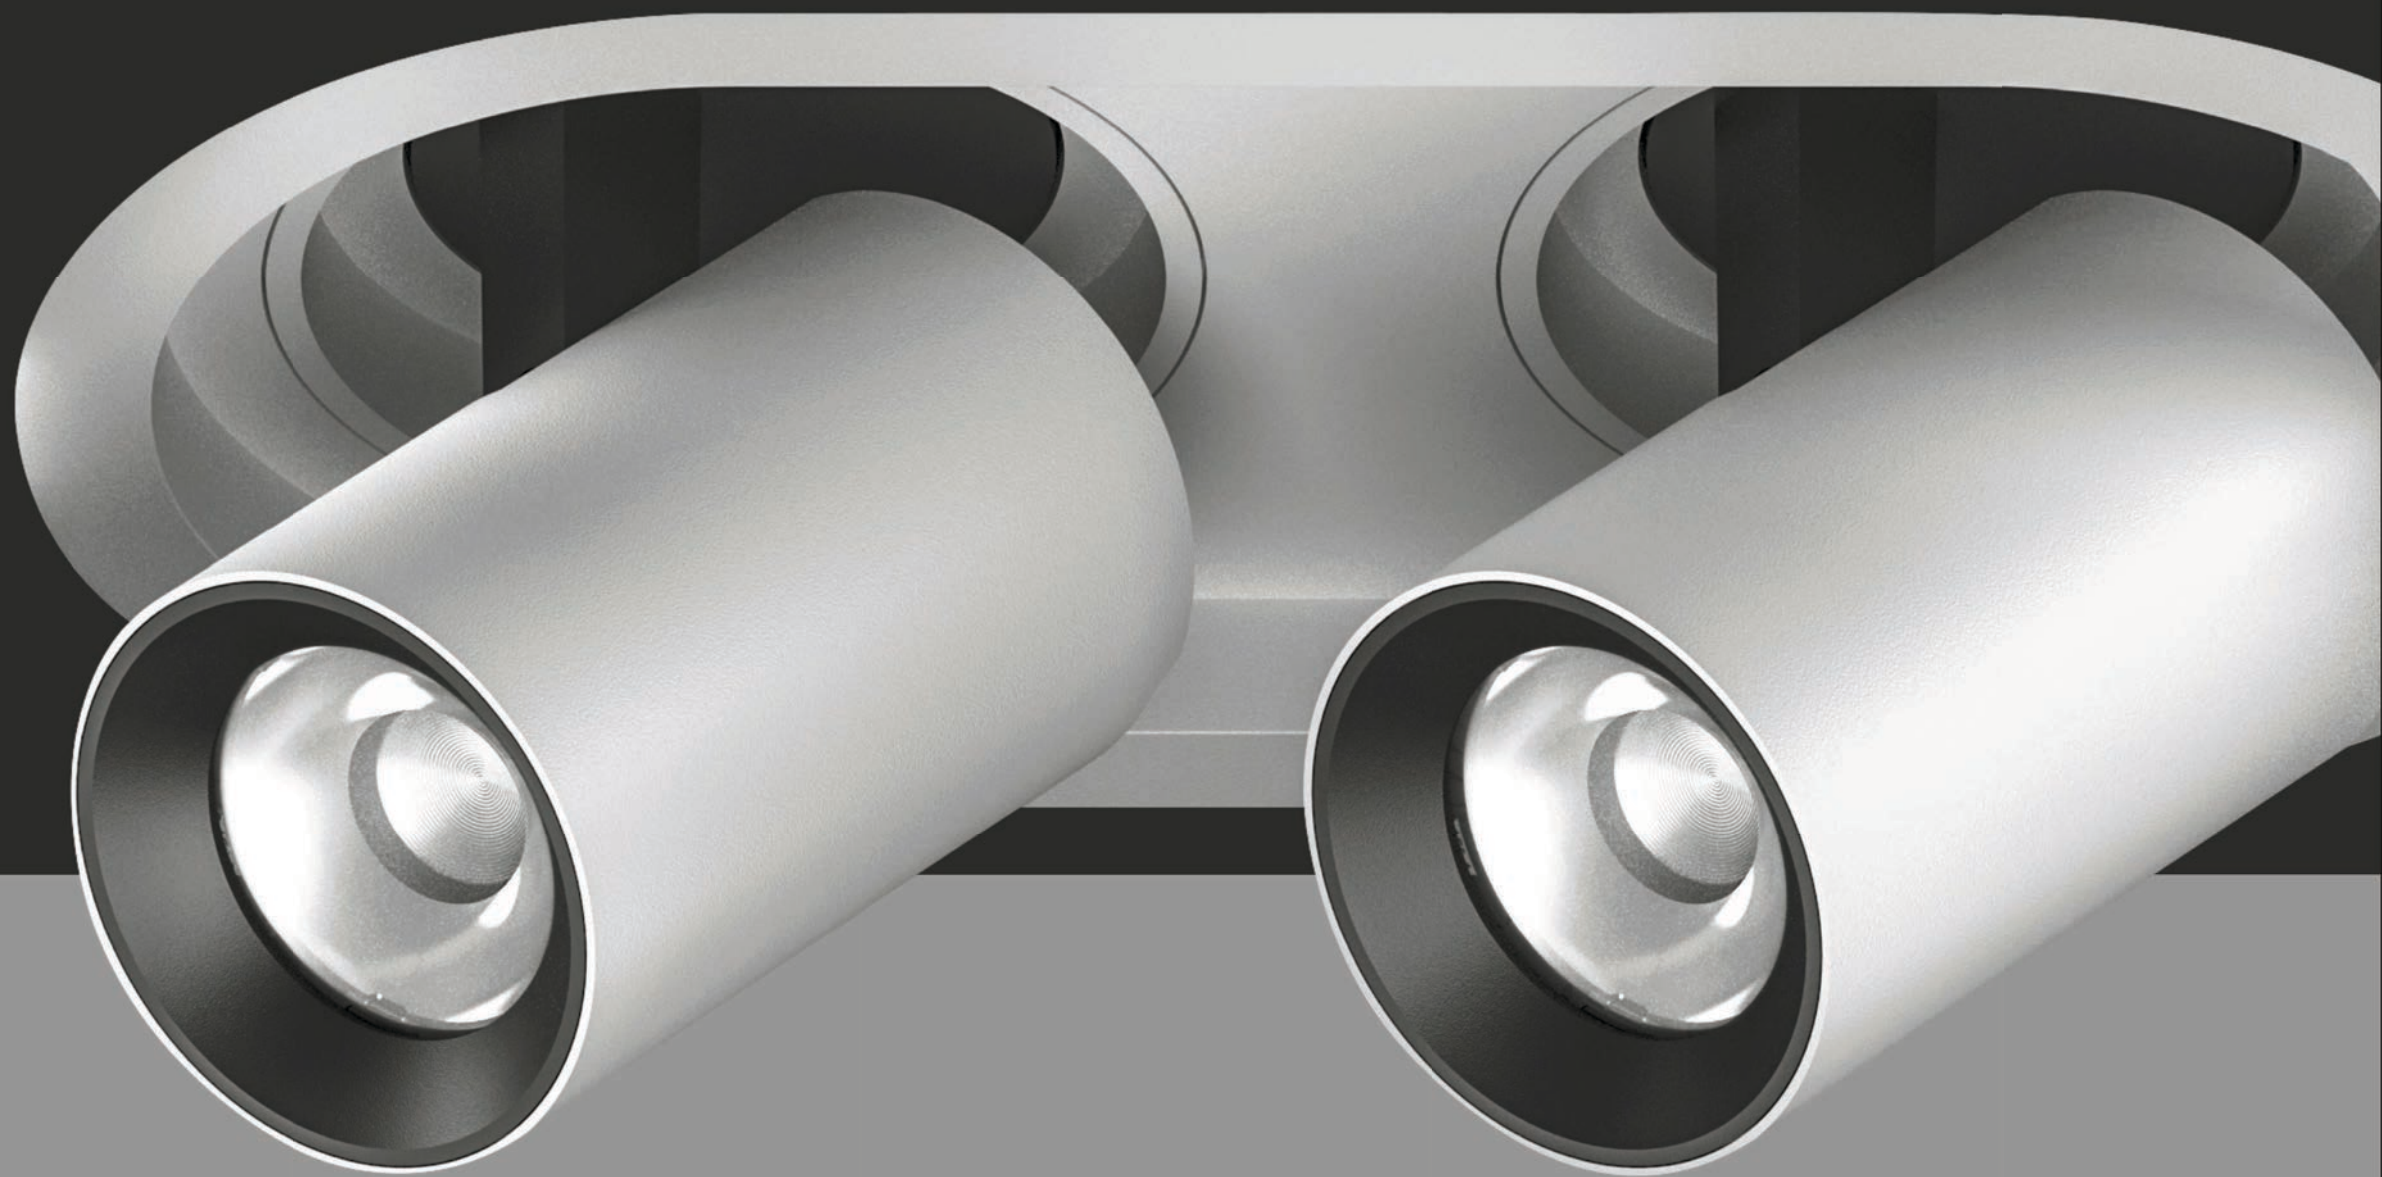

SL-105

SL-106

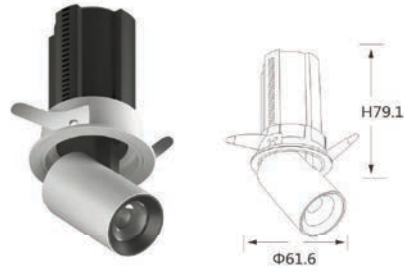

Product code	SLV-55R1	SLV-75R1	SLV-95R1
Power (W)	7W	12W	20W
Lumen (Lm)	450	850	1850
Size (mm)	Ø62x86	Ø84x104	Ø110x127
Cut-off (mm)	Ø55	Ø75	Ø95
Voltage	220-240V / 100-277V		
PF	>0.5 / >0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners






Optical fittings





Product close-up



CCT

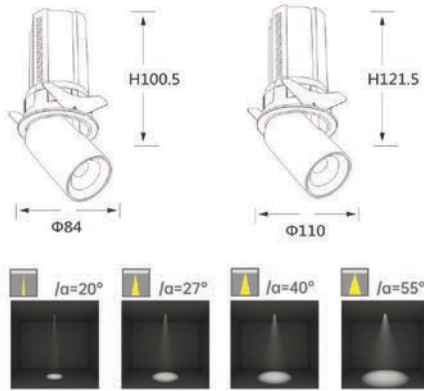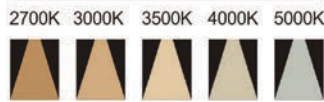

Light distribution curve

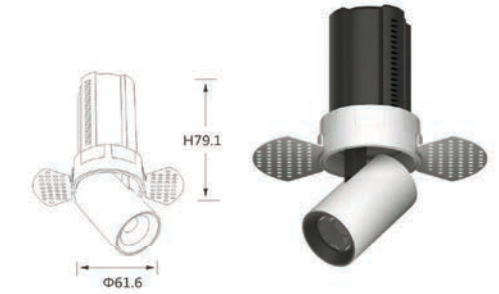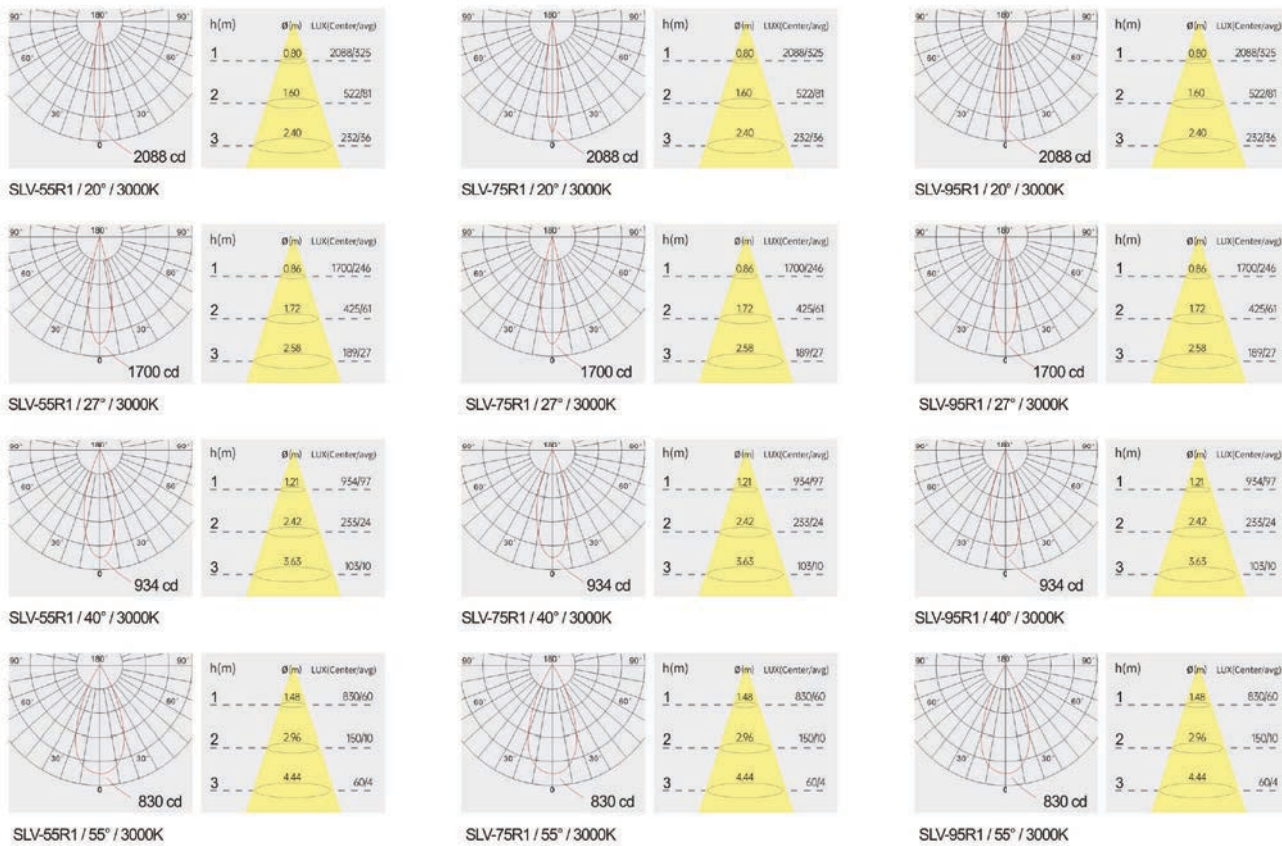

Product code	SLV-55R1T	SLV-75R1T	SLV-95R1T
Power (W)	7W	12W	20W
Lumen (Lm)	450	850	1850
Size (mm)	Ø53x85	Ø74x104	Ø92x127
Cut-off (mm)	Ø58	Ø77	Ø97
Voltage	220-240V / 100-277V		
PF	>0.5 / >0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners





Optical fittings




Product close-up






CCT

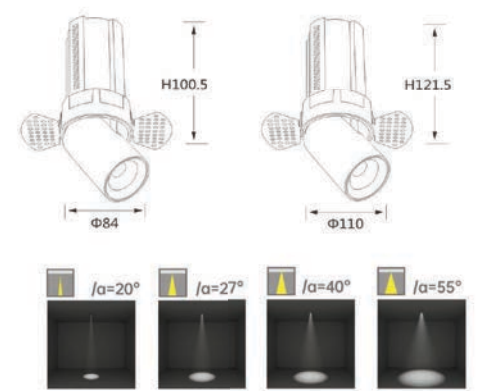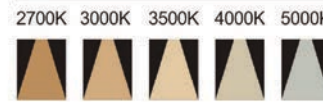

Light distribution curve

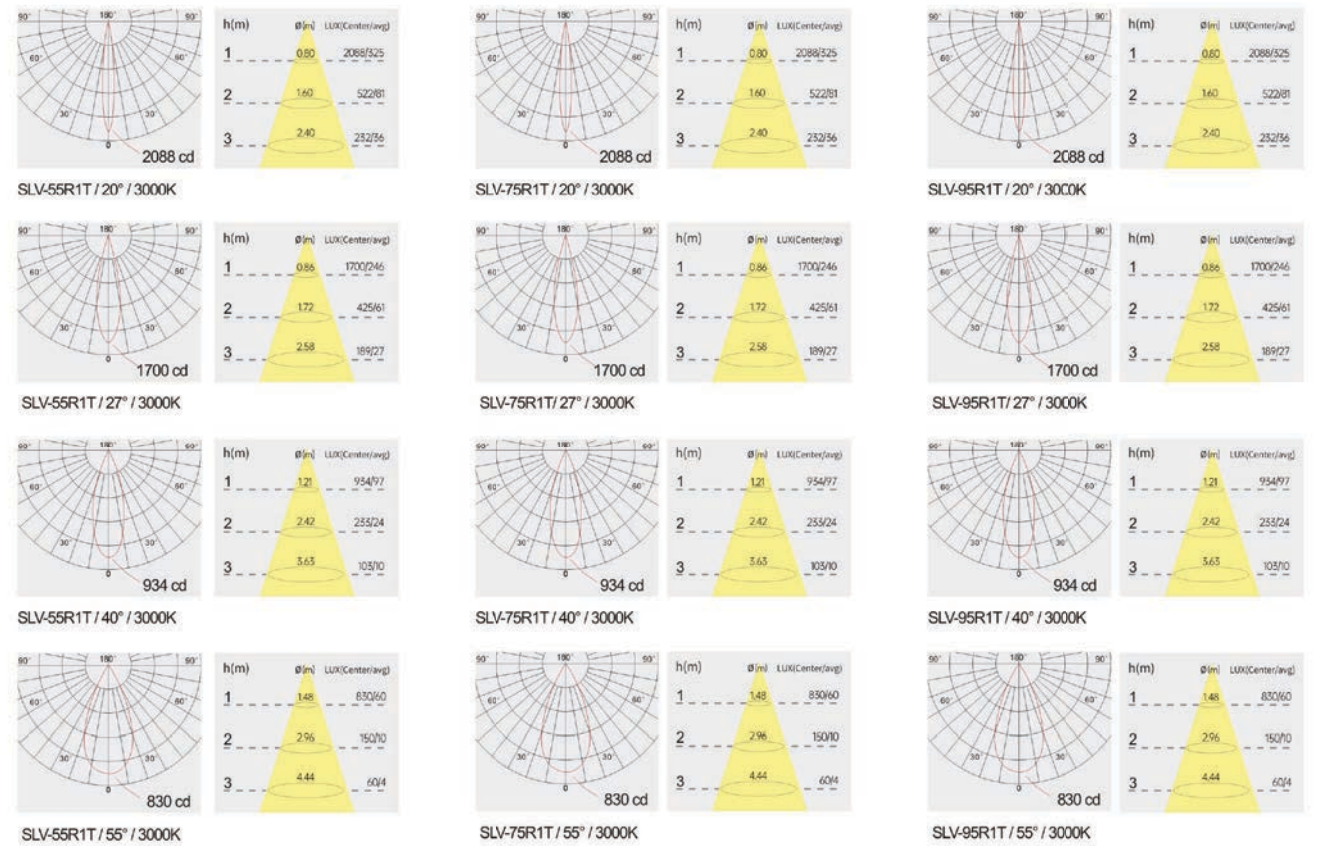

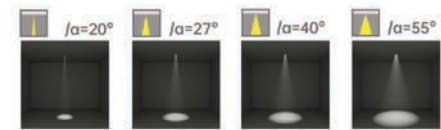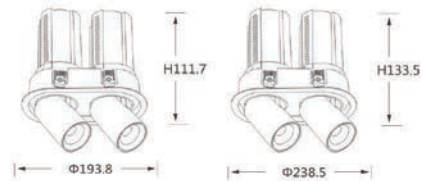

Product code	SLV-55R2	SLV-75R2	SLV-95R2
Power (W)	7W*2	12W*2	20W*2
Lumen (Lm)	450*2	850*2	1850*2
Size (mm)	Ø140xH79	Ø194xH104	Ø239xH125
Cut-off (mm)	Ø126xH65	Ø178xH88	Ø223xH109
Voltage	220-240V / 100-277V		
PF	>0.5 / >0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners




Optical fittings




Product close-up



CCT

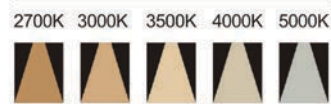

Light distribution curve

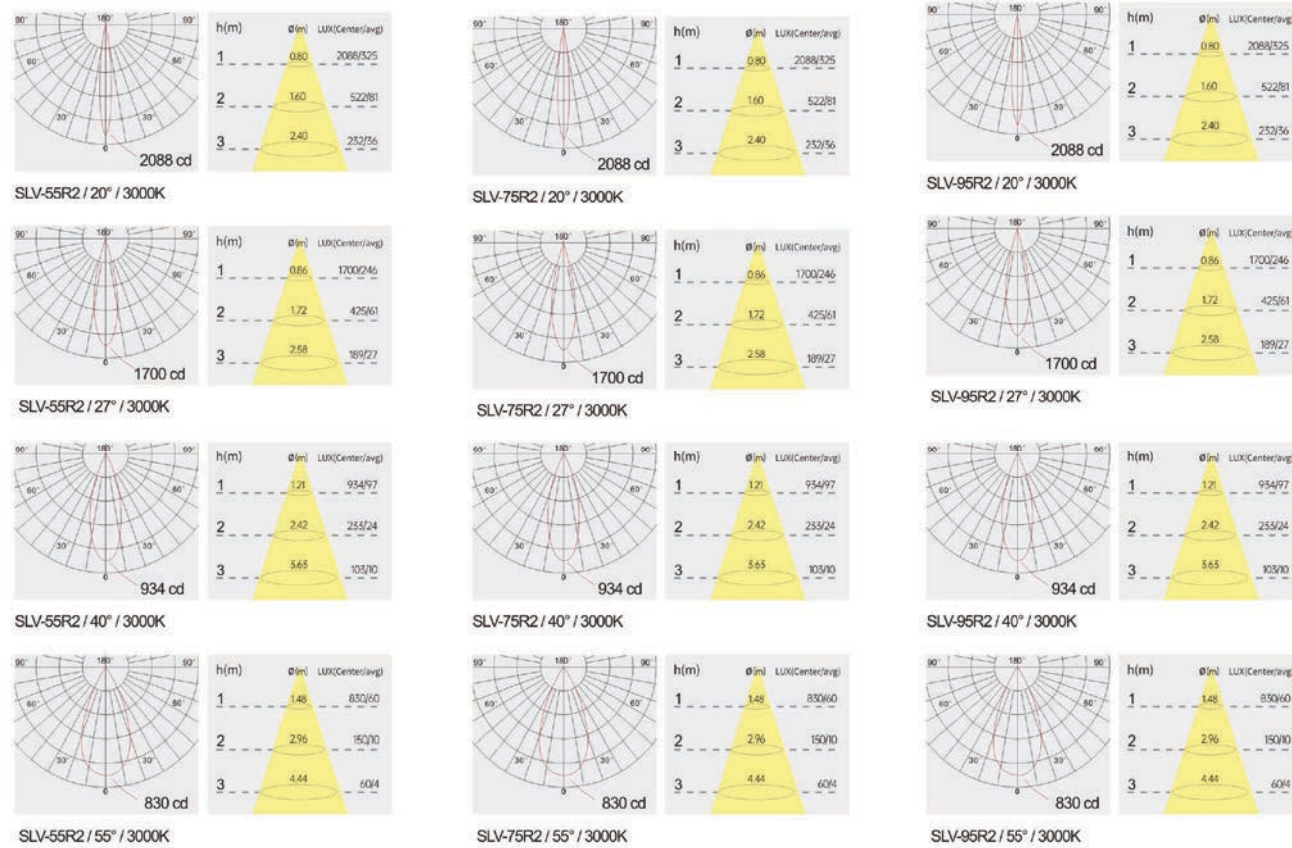

Product code	SLV-55R2T	SLV-75R2T	SLV-95R2T
Power (W)	7W*2	12W*2	20W*2
Lumen (Lm)	450*2	850*2	1850*2
Size (mm)	Ø126xH65	Ø178xH88	Ø222xH118
Cut-off (mm)	Ø129xH68	Ø180xH91	Ø225xH111
Voltage	220-240V / 100-277V		
PF	>0.5 / >0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners







Optical fittings




Product close-up





CCT

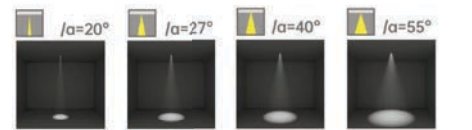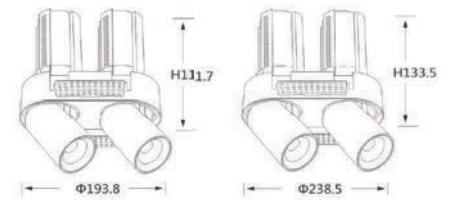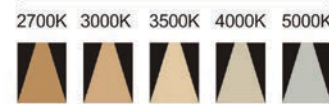



Light distribution curve

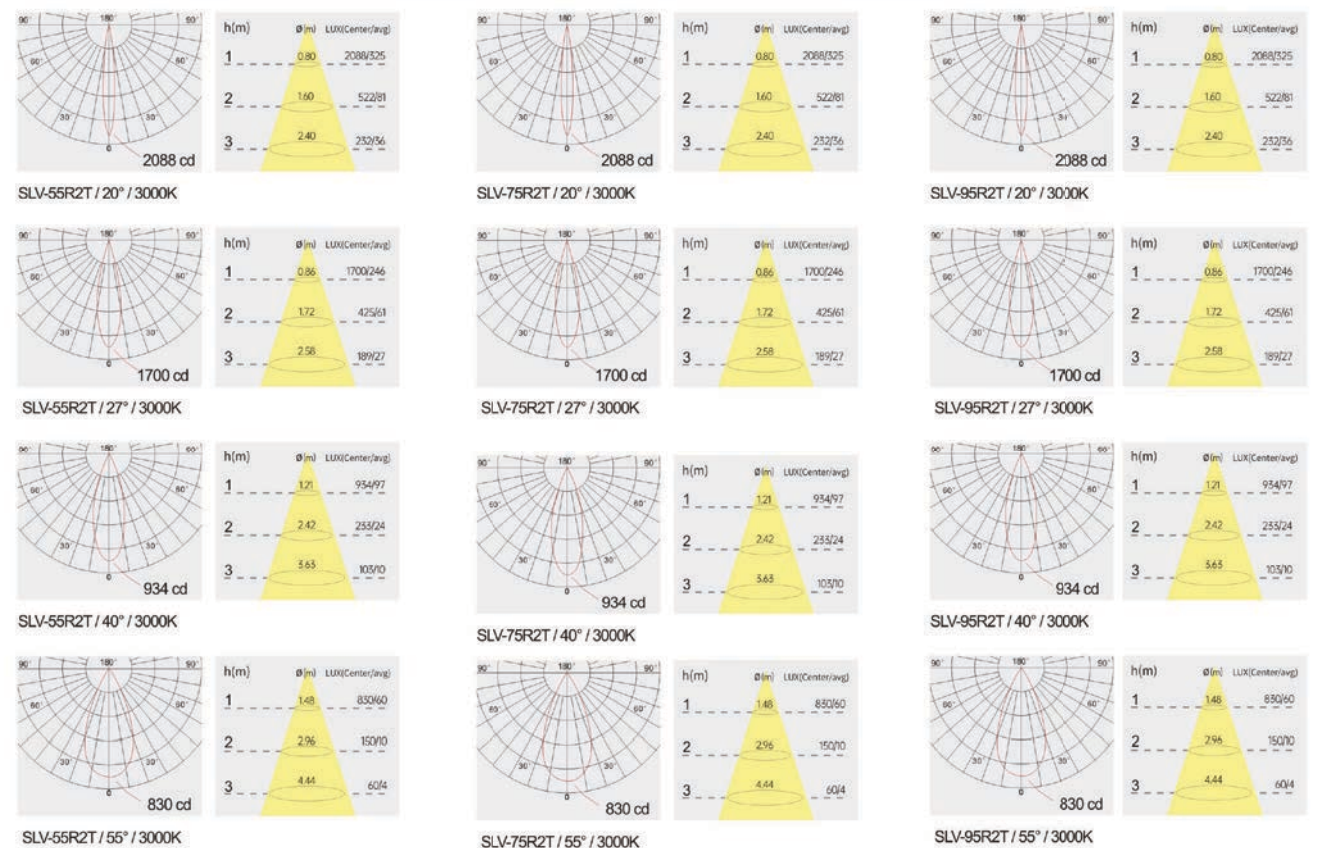

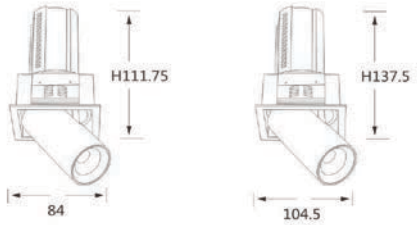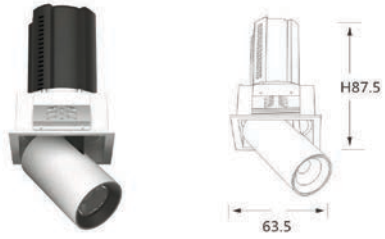

Product code	SLV-55S1	SLV-75S1	SLV-95S1
Power (W)	7W	12W	20W
Lumen (Lm)	450	850	1850
Size (mm)	64x64x94	85x85x116	105x105x144
Cut-off (mm)	55x55	75x75	95x95
Voltage	220-240V / 100-277V		
PF	>0.5 / >0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Product code	SLV-55S1T	SLV-75S1T	SLV-95S1T
Power (W)	7W	12W	20W
Lumen (Lm)	450	850	1850
Size (mm)	54x54x94	74x74x116	97x97x144
Cut-off (mm)	58x58	77x77	97x97
Voltage	220-240V / 100-277V		
PF	>0.5 / >0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

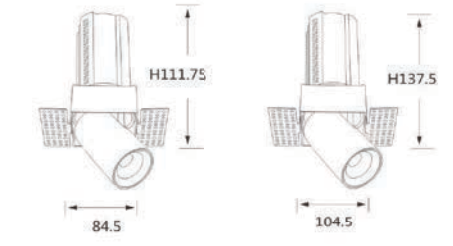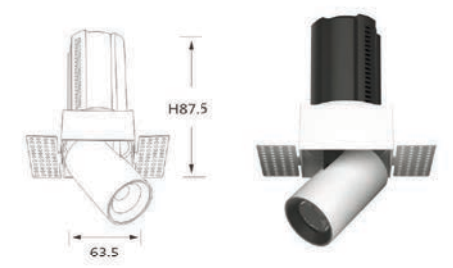

Strategic partners




Optical fittings



Product close-up



CCT

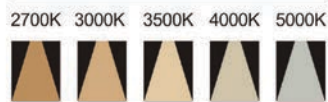


Strategic partners



Optical fittings




Product close-up




CCT





Light distribution curve

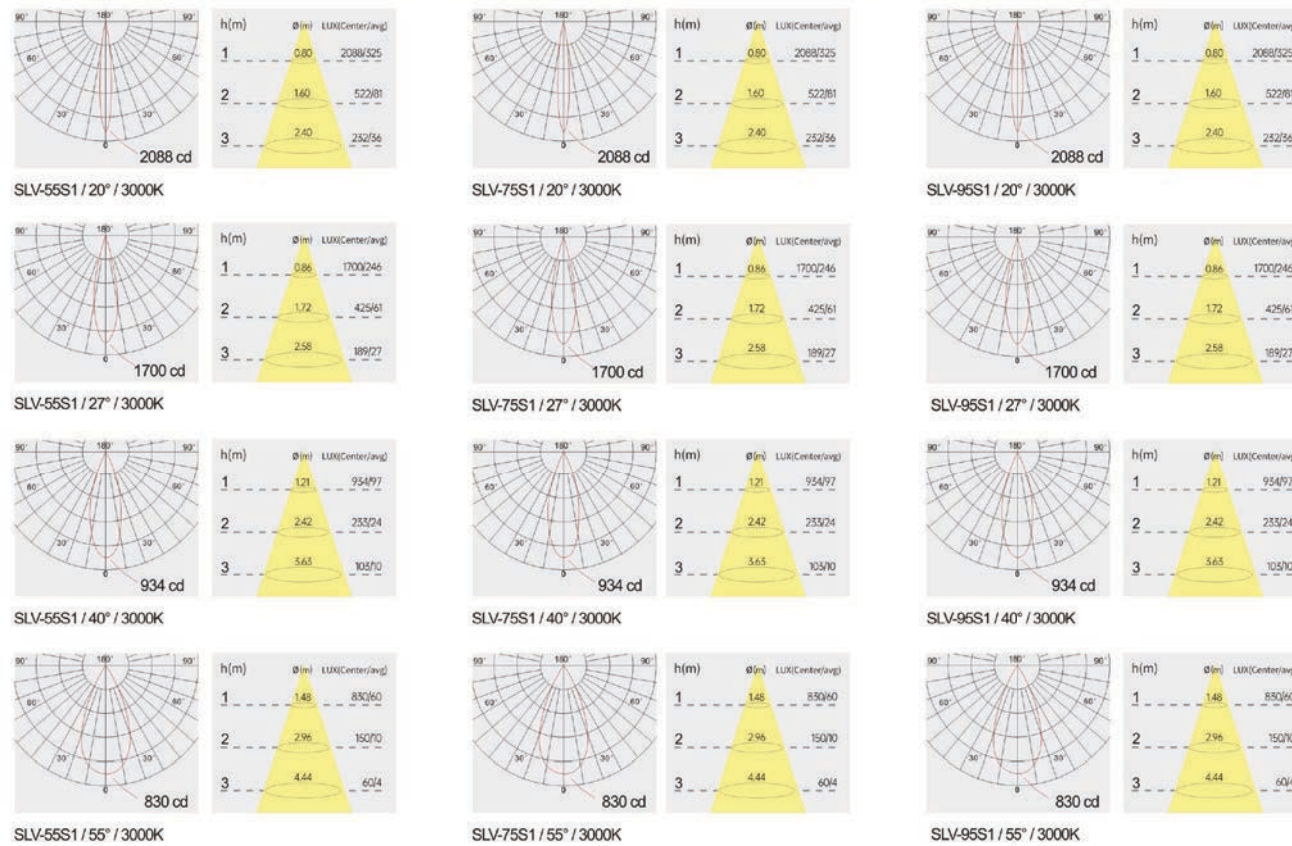

Light distribution curve

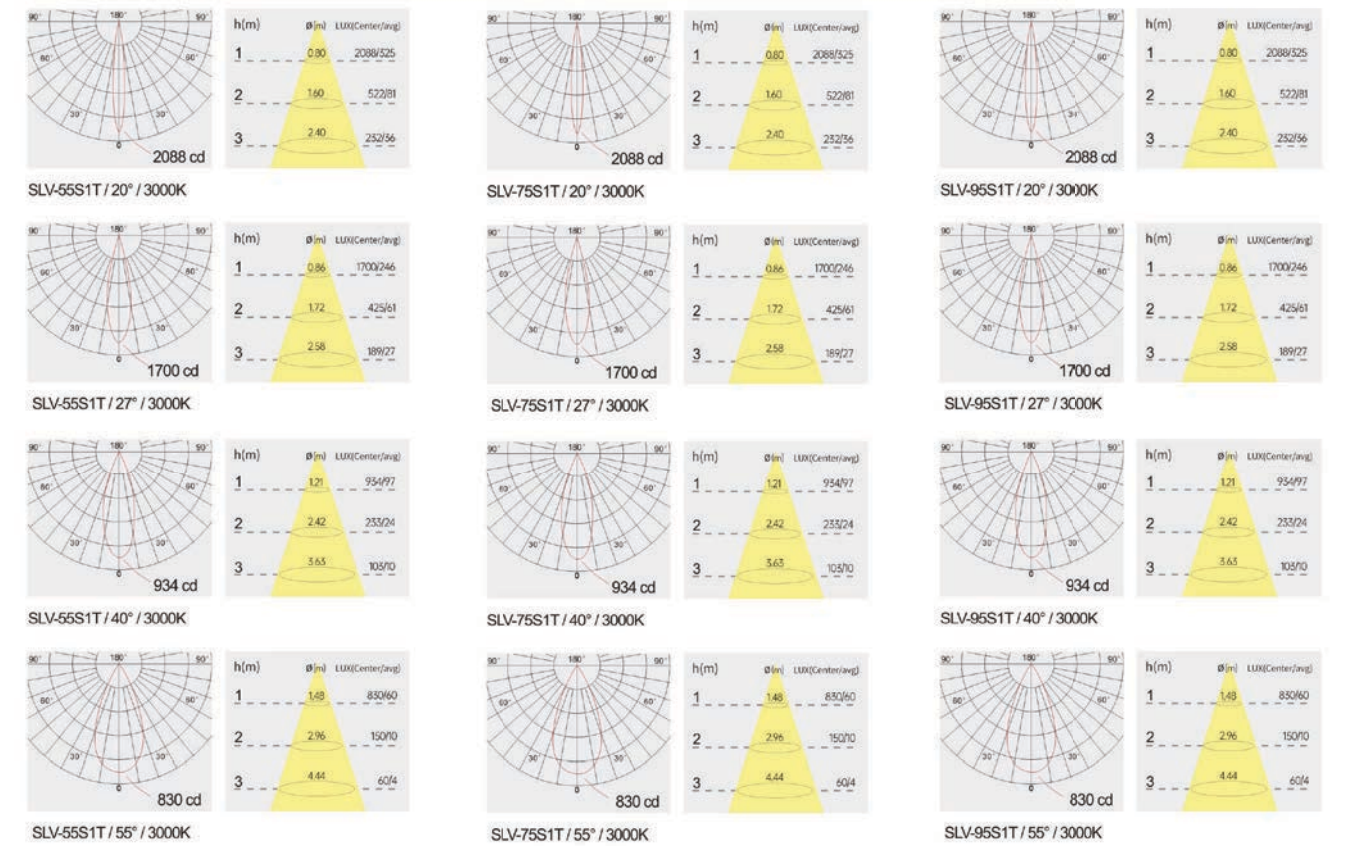

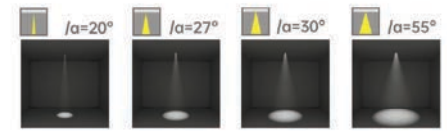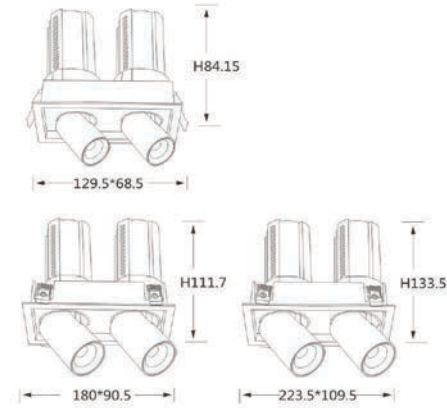

Product code	SLV-55S2	SLV-75S2	SLV-95S2
Power (W)	7W*2	12W*2	20W*2
Lumen (Lm)	450*2	850*2	1850*2
Size (mm)	130x69	180x91	224x110
Cut-off (mm)	120x60	164x77	207x95
Voltage	220-240V / 100-277V		
PF	>0.5 / >0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners





Optical fittings






Product close-up



CCT

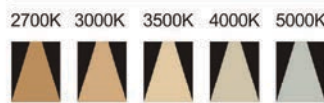

Light distribution curve

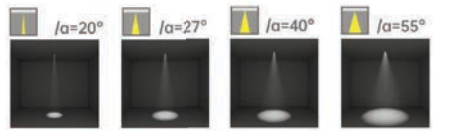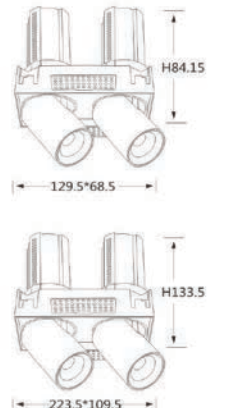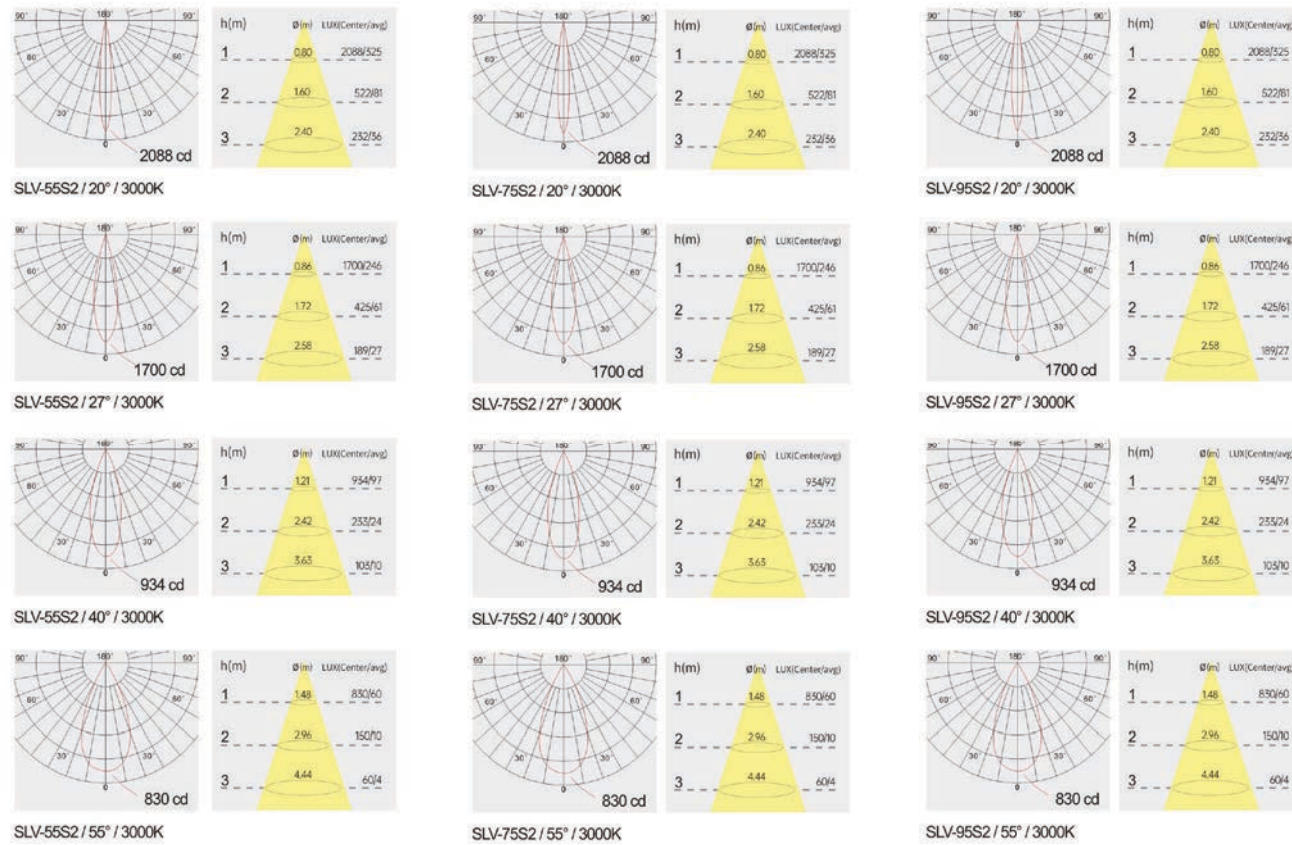

Product code	SLV-55S2T	SLV-75S2T	SLV-95S2T
Power (W)	7W*2	12W*2	20W*2
Lumen (Lm)	450*2	850*2	1850*2
Size (mm)	116x60	164x78	207x95
Cut-off (mm)	120x62	167x80	209x97
Voltage	220-240V / 100-277V		
PF	>0.5 / >0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners





Optical fittings




Product close-up



CCT

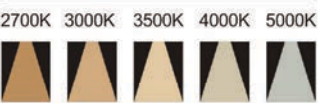

Light distribution curve

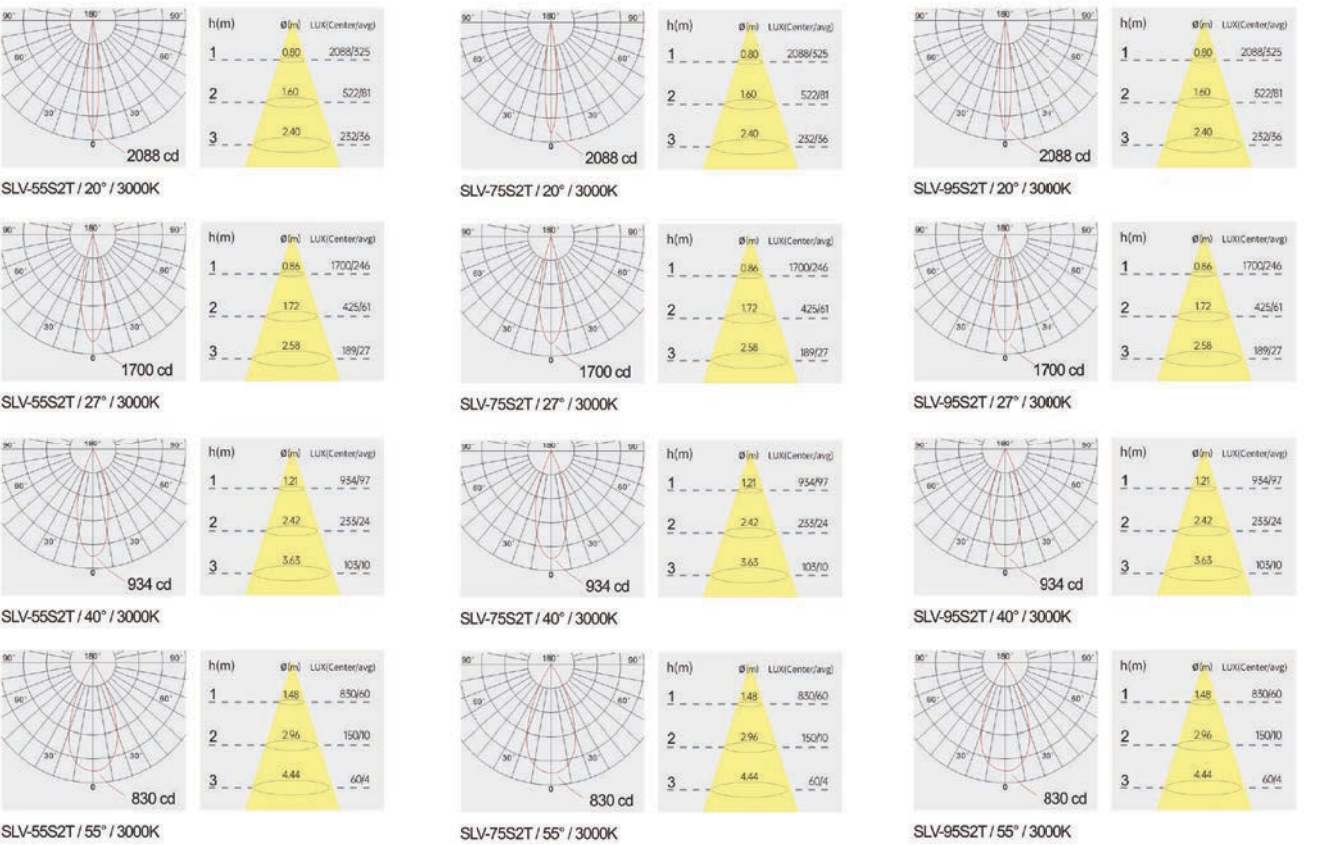

NMP

According to the trend of The Times, the modern and recognized decoration style to use narrow edge minimalist design, anti-glare energy-saving and eye protection, see the light can not see the lamp concept, the space becomes more simple, make life more comfortable and wonderful.









NMP



Product code	NMP-1200	NMP-1300	NMP-1500
Power (W)	20W	30W	40W
Lumen (Lm)	1850	2600	3800
Size (mm)	Ø120xH131	Ø135xH163	Ø150xH176
Cut-off (mm)	Ø110	Ø125	Ø140
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners


LED
 Driver

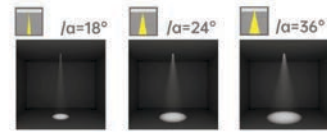

CCT

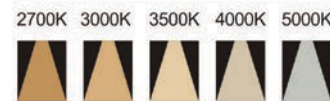

Light distribution curve

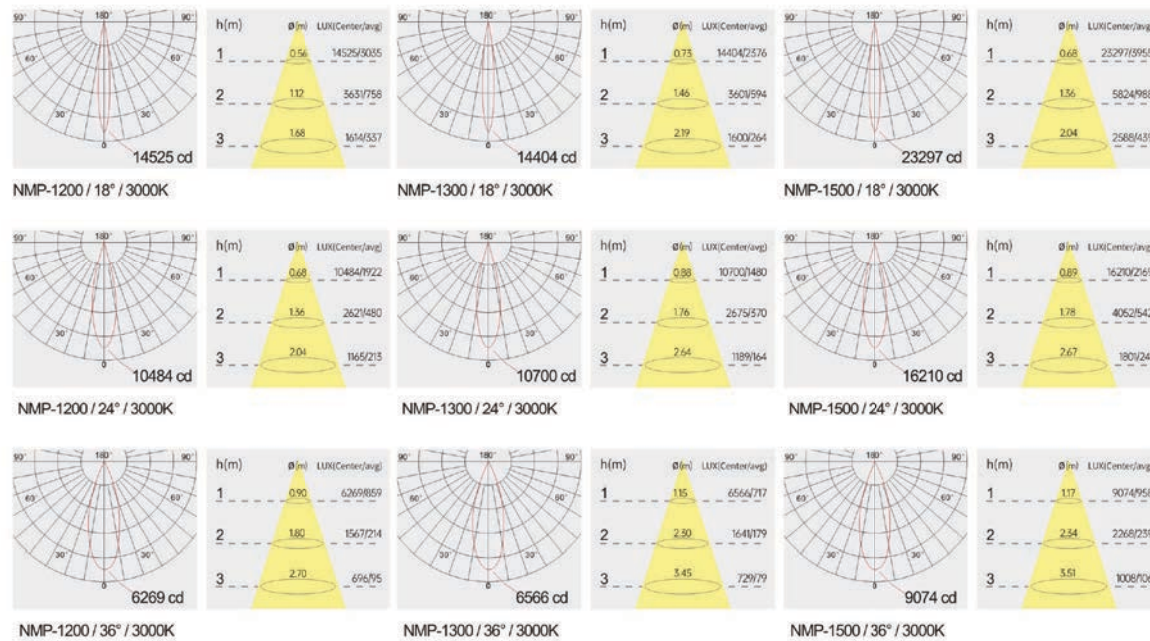


NMP





Product code	NMP-1210	NMP-1310	NMP-1510
Power (W)	20W	30W	40W
Lumen (Lm)	1600	2600	3800
Size (mm)	120x120x131	135x135x163	150x150x176
Cut-off (mm)	110x110	125x125	140x140
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners


LED
 Driver

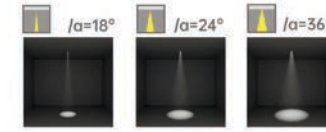

CCT

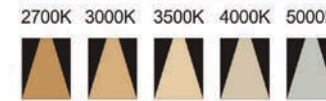




Light distribution curve

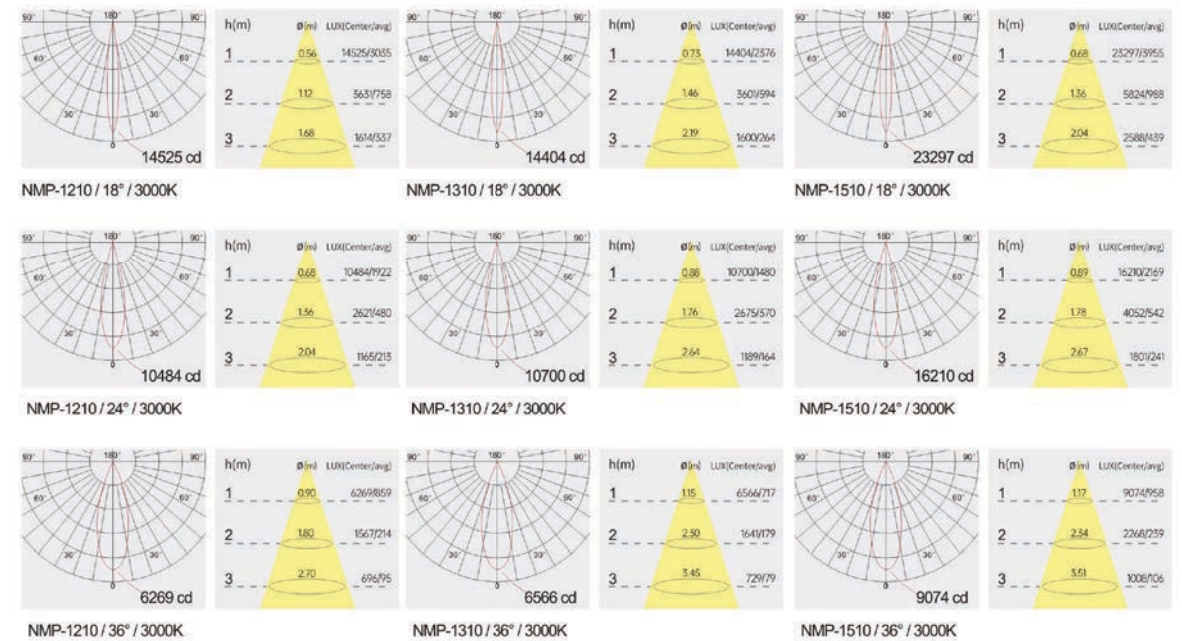

SLS

According to the trend of The Times, the modern and recognized decoration style to use narrow edge minimalist design, anti-glare energy-saving and eye protection, see the light can not see the lamp concept, the space becomes more simple, make life more comfortable and wonderful.

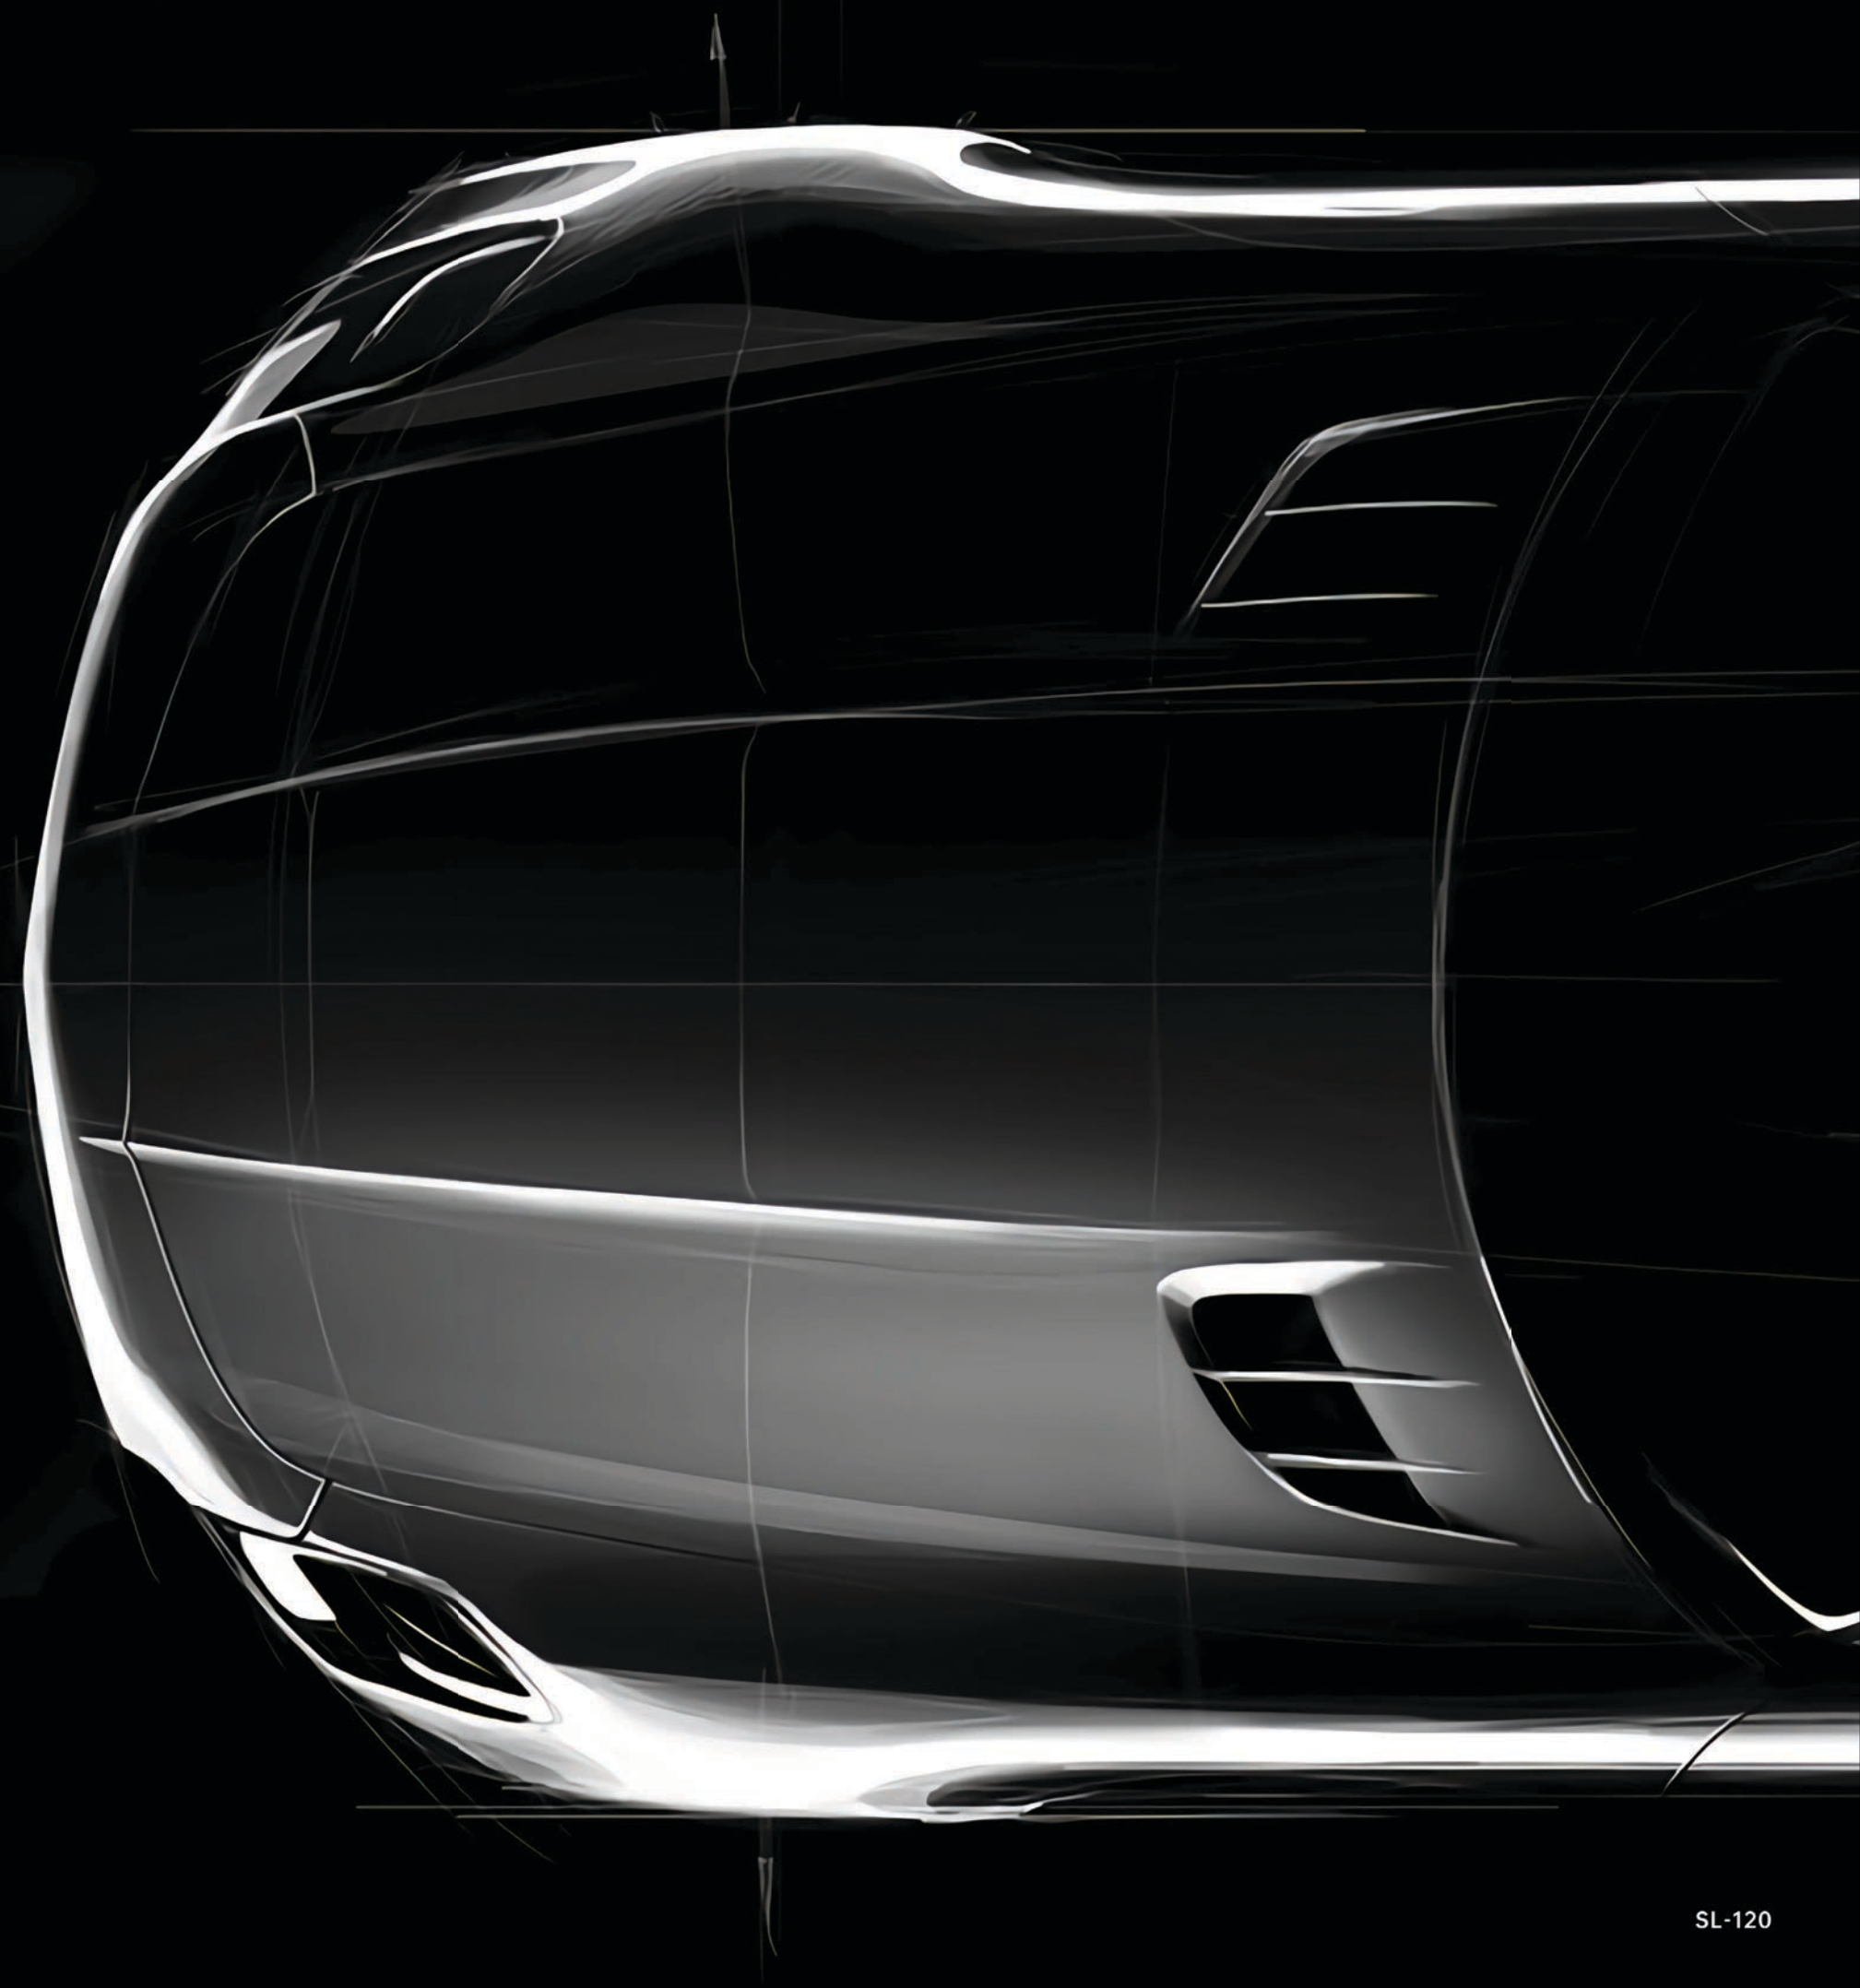

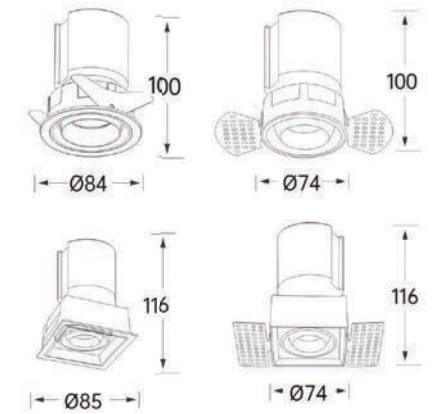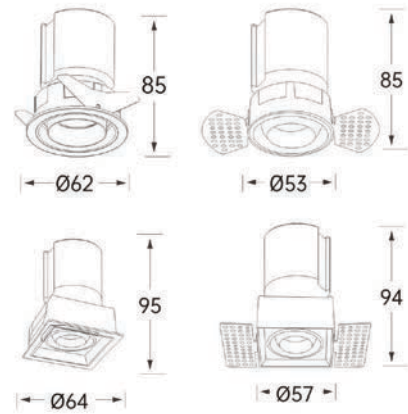

Product code	SLS05508R	SLS05508RT	SLS05508S	SLS05508ST
Power (W)	8W	8W	8W	8W
Lumen (Lm)	600	600	600	600
Size (mm)	Ø62xH85	Ø53xH85	64x64x94	54x54x94
Cut-off (mm)	Ø55	Ø58	55x55	58x58
Voltage	220-240V / 100-277V			
PF	>0.9			
CRI	83 / 90 / 95 / Thrive			
Color	Black / White / Customized			

Product code	SLS07518R	SLS07518RT	SLS07518S	SLS07518ST
Power (W)	18W	18W	18W	18W
Lumen (Lm)	1600	1600	1600	1600
Size (mm)	Ø84xH100	Ø74xH100	85x85x116	74x74x116
Cut-off (mm)	Ø75	Ø77	75x75	77x77
Voltage	220-240V / 100-277V			
PF	>0.9			
CRI	83 / 90 / 95 / Thrive			
Color	Black / White / Customized			




Strategic partners



Strategic partners




Light distribution curve

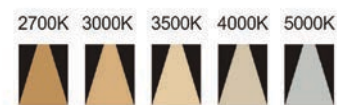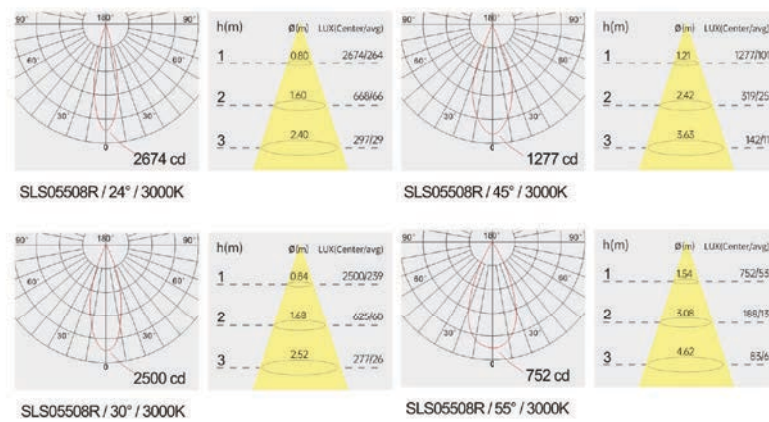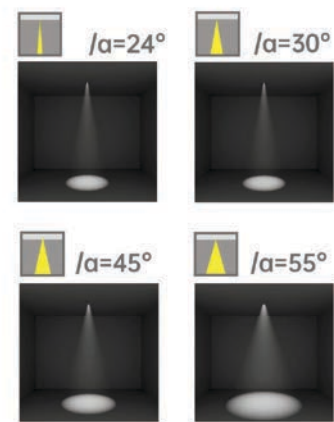



Optical fittings




Light distribution curve

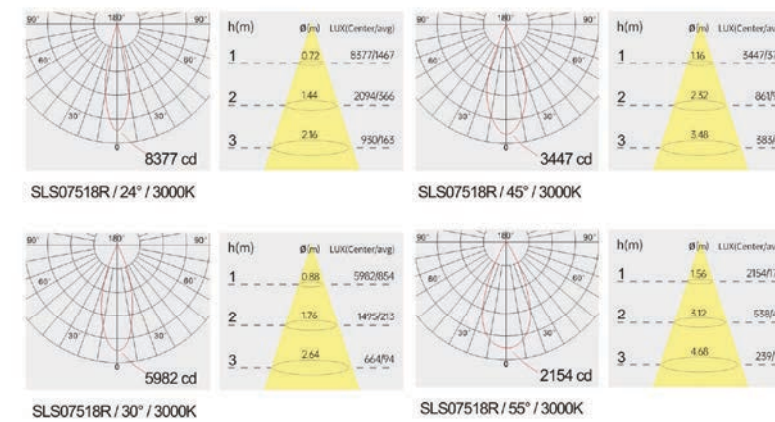

Optical fittings

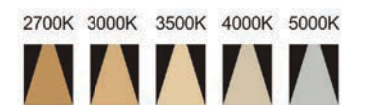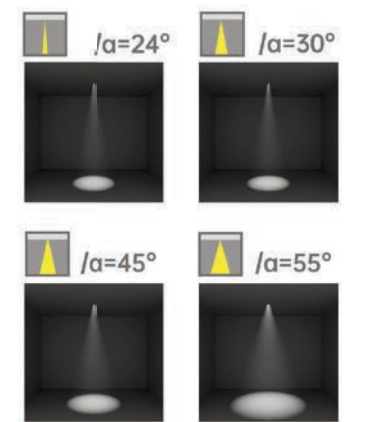



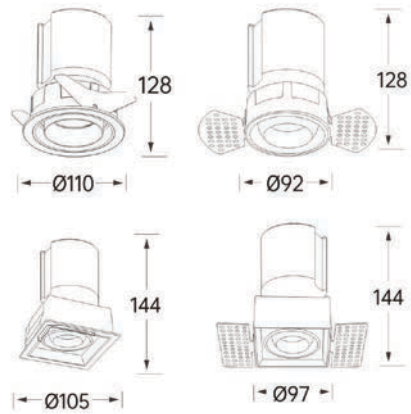


Product code	SLS09532R	SLS09532RT	SLS09532S	SLS09532ST
Power (W)	32W	32W	32W	32W
Lumen (Lm)	3000	3000	3000	3000
Size (mm)	Ø110xH128	Ø92xH128	105x105x144	97x97x144
Cut-off (mm)	Ø95	Ø97	95x95	97x97
Voltage	220-240V / 100-277V			
PF	>0.9			
CRI	83 / 90 / 95 / Thrive			
Color	Black / White / Customized			

Strategic partners



Light distribution curve

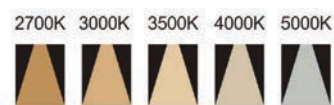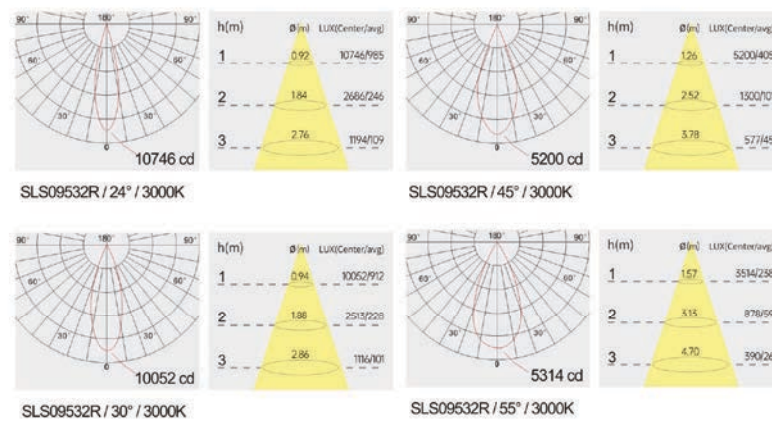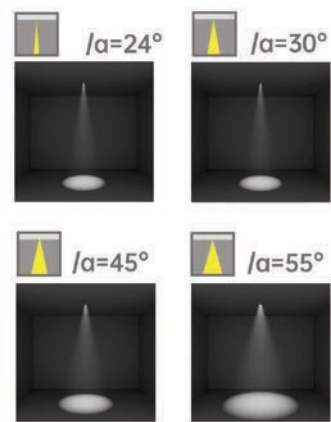

Optical fittings



Small Size Big Energy






SLW

Product code	SLW075	SLW085
Power (W)	20W	25W
Lumen (Lm)	1600	1800
Size (mm)	Ø87x90	Ø100x110
Cut-off (mm)	Ø75	Ø85
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners




Light distribution curve

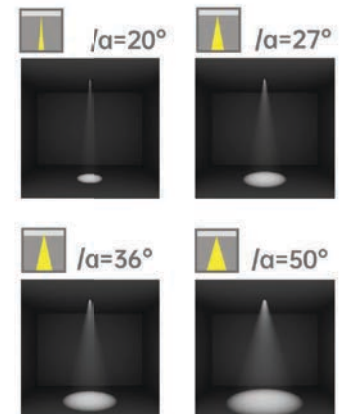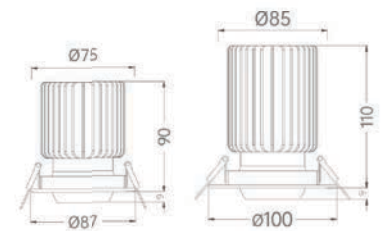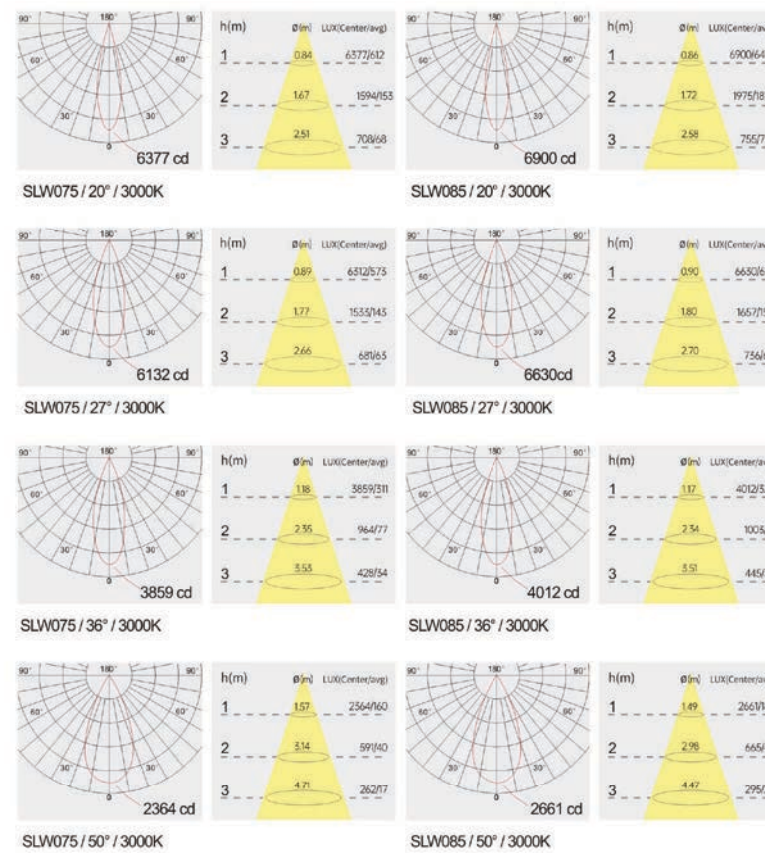

Optical fittings

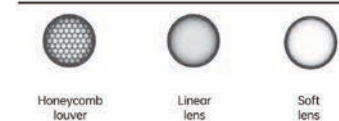

Product close-up










SLW

Product code	SLW095	SLW105
Power (W)	30W	40W
Lumen (Lm)	2900	3600
Size (mm)	Ø107x100	Ø125x120
Cut-off (mm)	Ø95	Ø105
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners





Light distribution curve

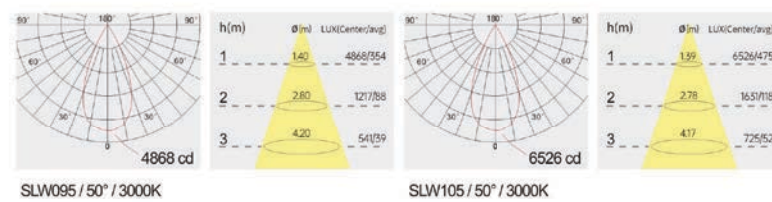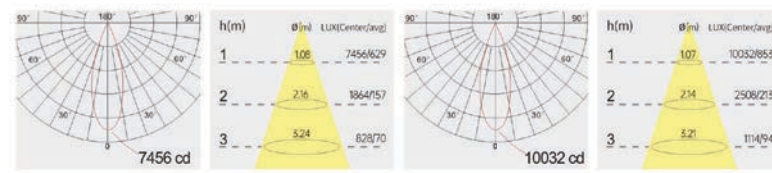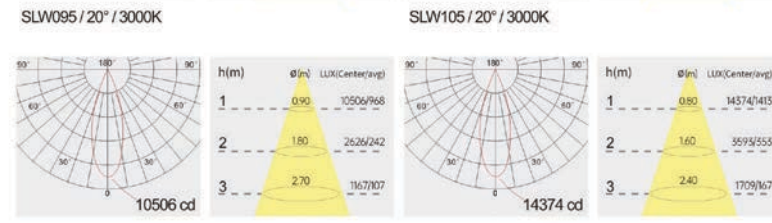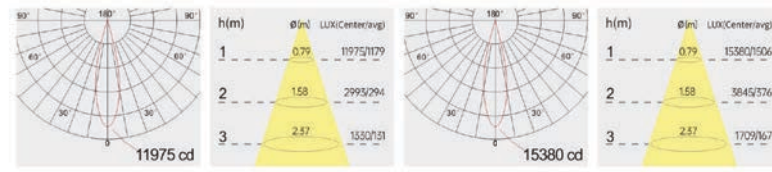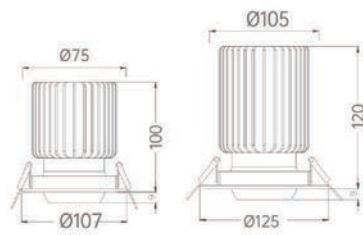

Optical fittings



Product close-up

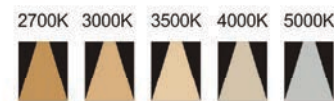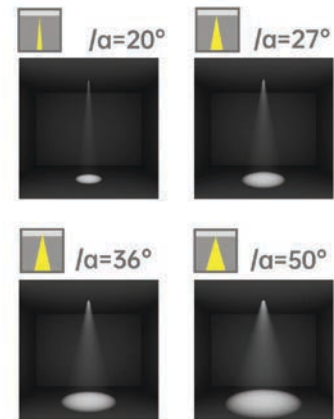






SLW

Product code	SLW115	SLW140
Power (W)	50W	60W
Lumen (Lm)	4800	5400
Size (mm)	Ø135x125	Ø160x145
Cut-off (mm)	Ø115	Ø140
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners





Light distribution curve

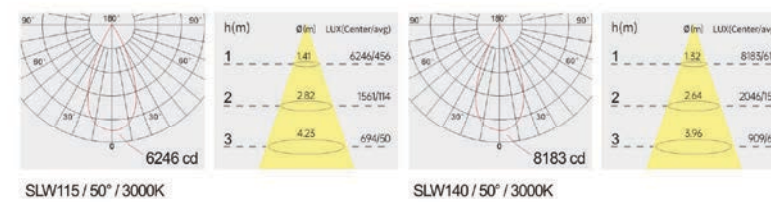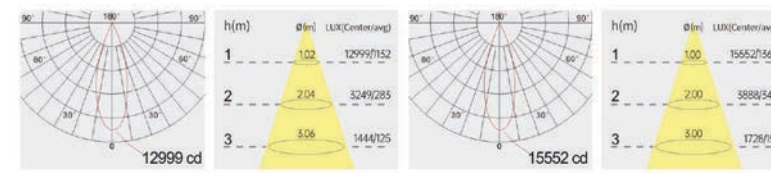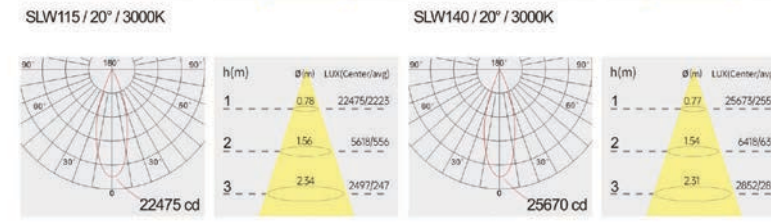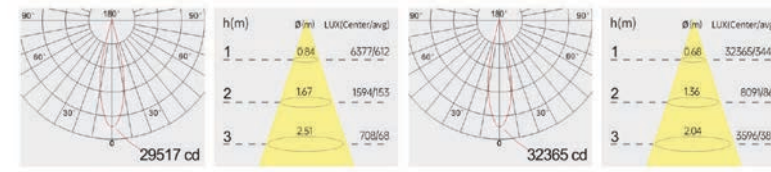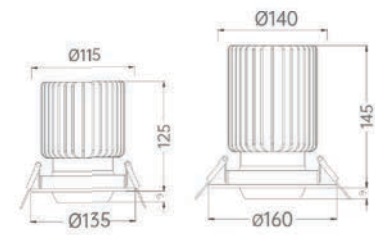

Optical fittings



Product close-up


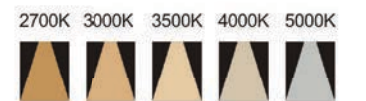
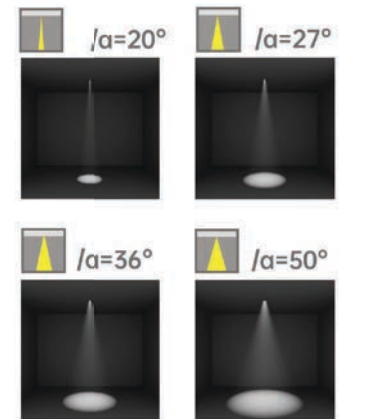


SLU




Product code	SLU05506	SLU06509	SLU07512
Power (W)	6W	9W	12W
Lumen (Lm)	450	600	950
Size (mm)	Ø65xH30	Ø75xH30	Ø85xH30
Cut-off (mm)	Ø55	Ø65	Ø75
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		


Strategic partners

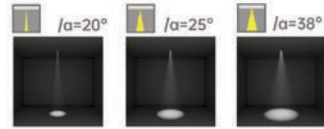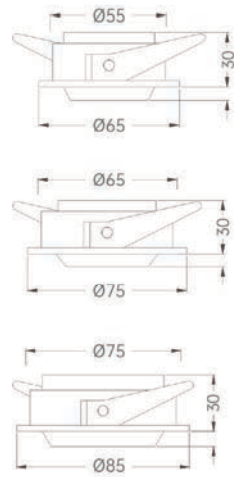

CCT

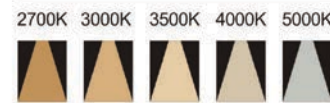

Light distribution curve

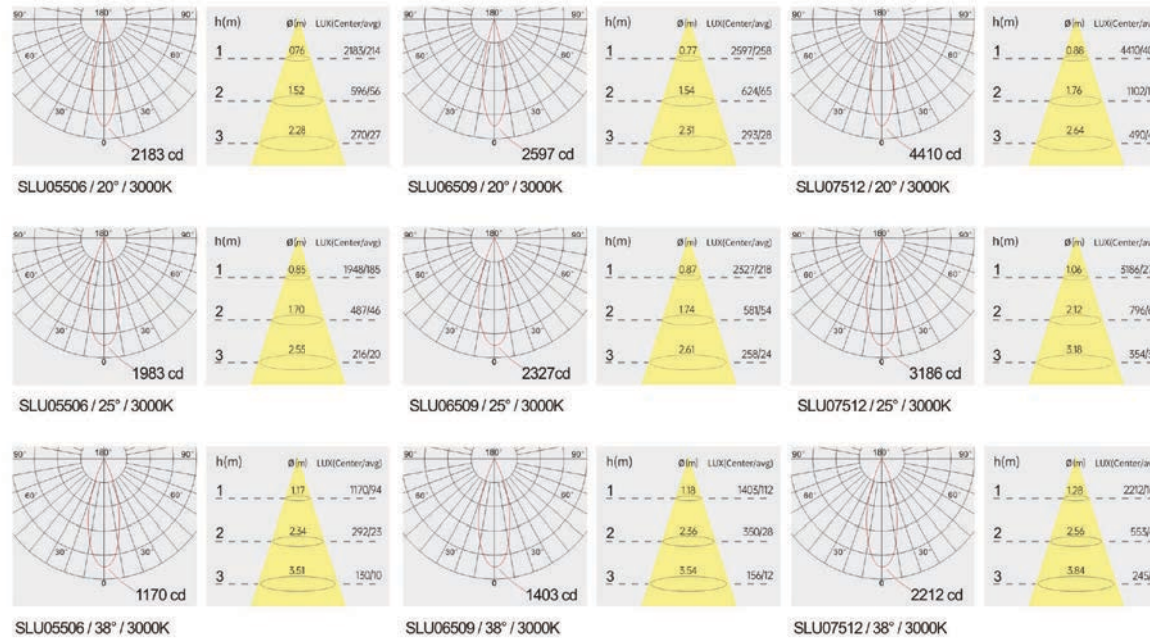



SLFS

Product code	SLFS1030
Power (W)	30W
Lumen (Lm)	2600
Size (mm)	Ø110xH140
Cut-off (mm)	Ø100
Voltage	220-240V / 100-277V
PF	>0.9
CRI	83 / 90 / 95 / Thrive
Color	Black / White / Customized

Strategic partners




Light distribution curve

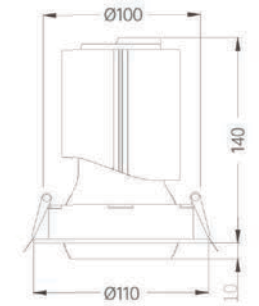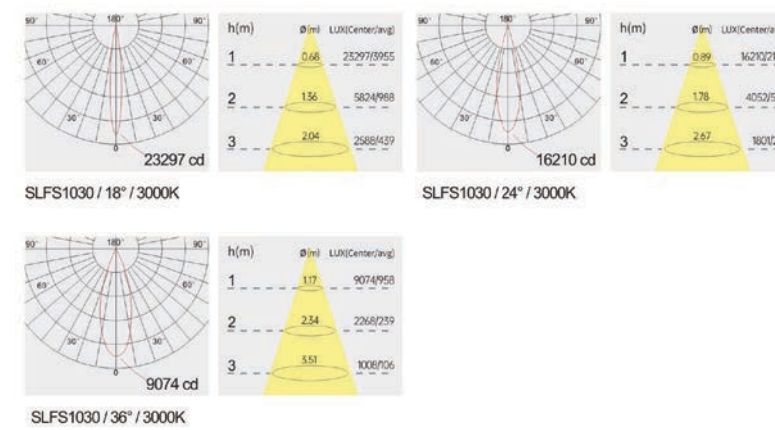



Optical fittings



Product close-up

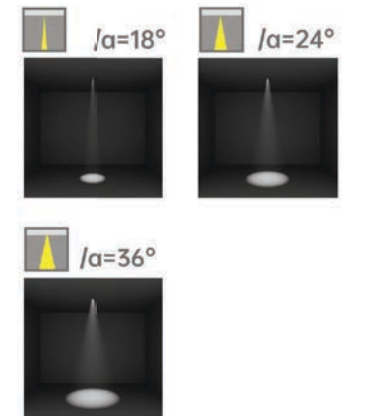



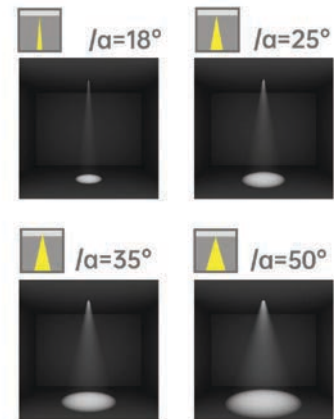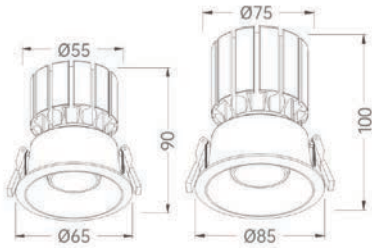


SLF

Product code	SLF05510R	SLF07515R
Power (W)	10W	15W
Lumen (Lm)	450	700
Size (mm)	Ø65xH90	Ø85xH100
Cut-off (mm)	Ø55	Ø75
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners



Light distribution curve

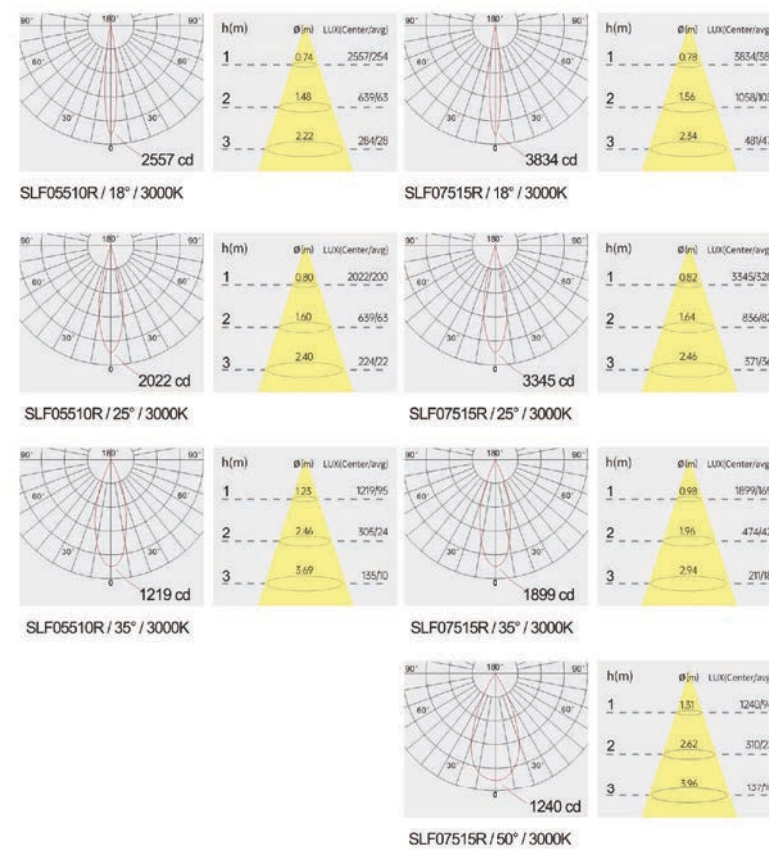

Optical fittings

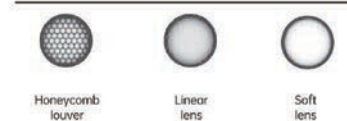

Product close-up




SLF

Product code	SLF09530R	SLF12540R
Power (W)	30W	40W
Lumen (Lm)	2000	3600
Size (mm)	Ø105xH125	Ø135xH125
Cut-off (mm)	Ø95	Ø125
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners






Light distribution curve


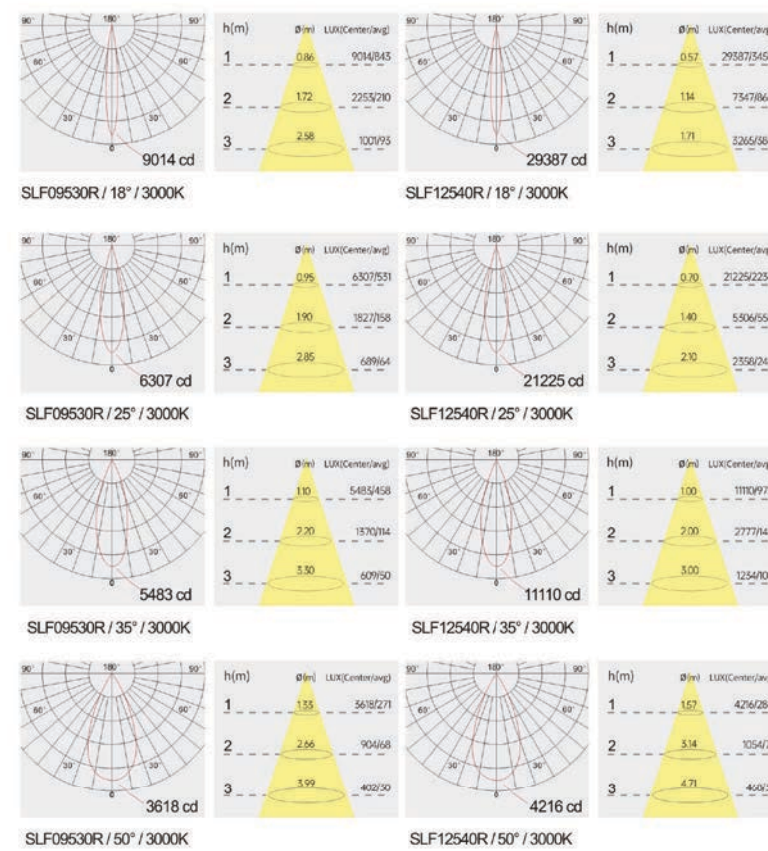


Optical fittings

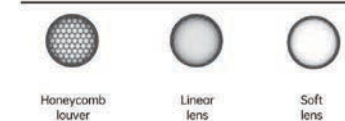

Product close-up

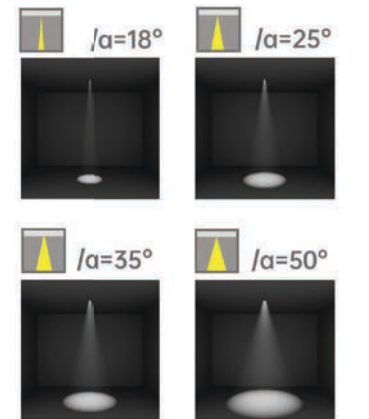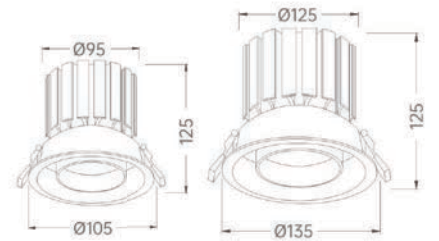

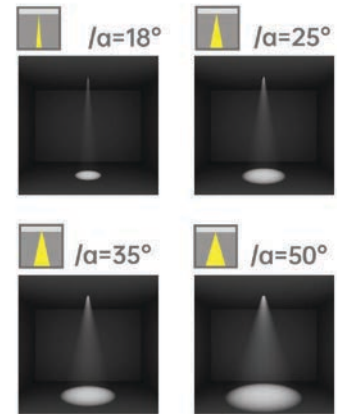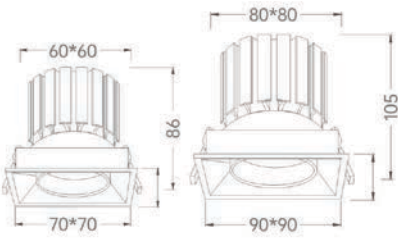


SLF

Product code	SLF06010S	SLF08015S
Power (W)	10W	15W
Lumen (Lm)	450	700
Size (mm)	70x70x86	90x90x105
Cut-off (mm)	60x60	80x80
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners



Light distribution curve

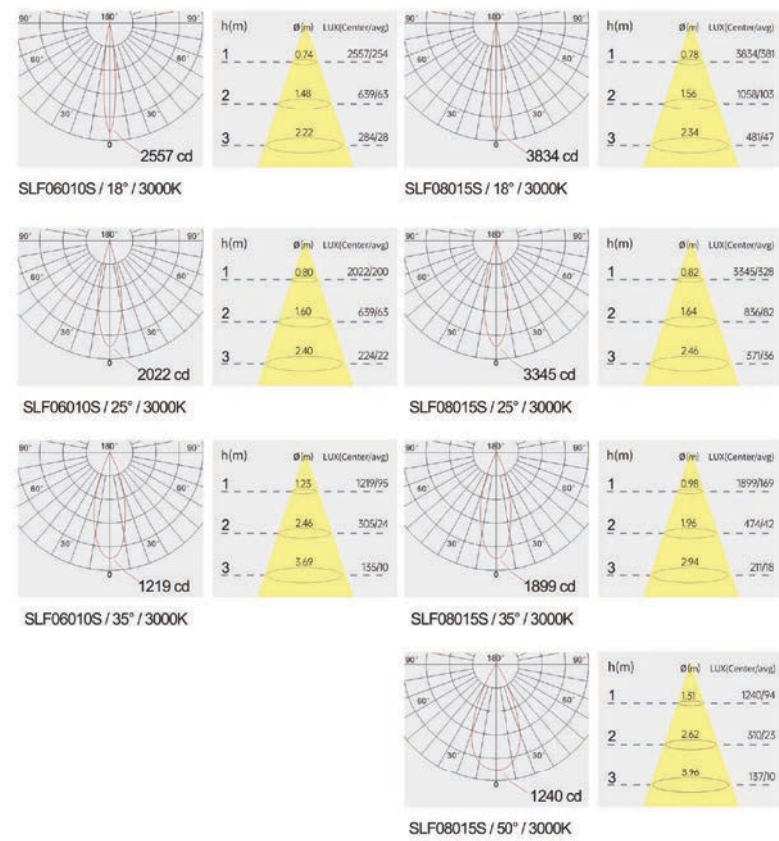

Optical fittings

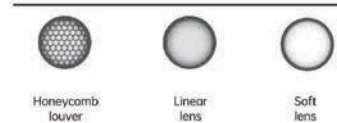

Product close-up




SLF

Product code	SLF10030S	SLF12540S
Power (W)	30W	40W
Lumen (Lm)	2000	3600
Size (mm)	110x110x132	138x138x125
Cut-off (mm)	100x100	125x125
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners






Light distribution curve





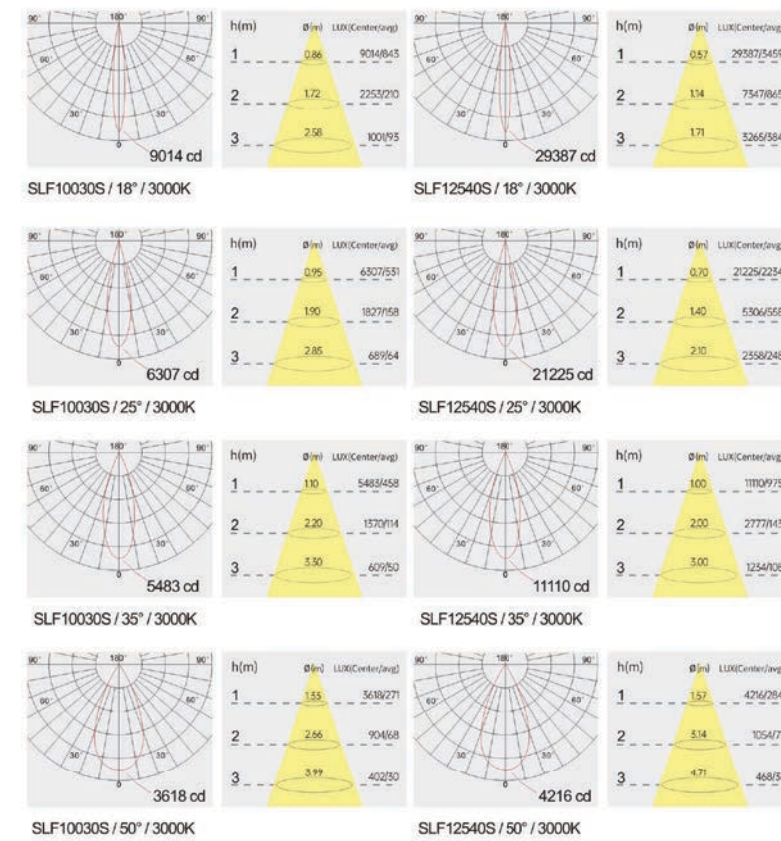


Optical fittings

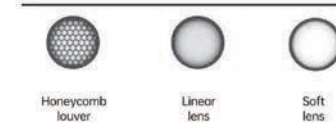

Product close-up

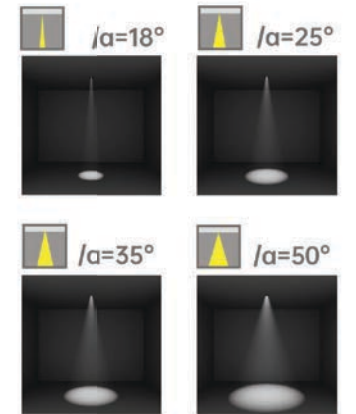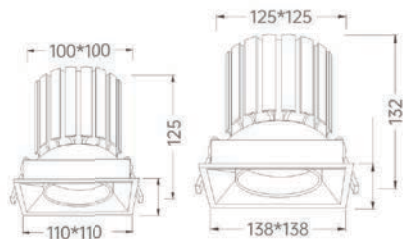

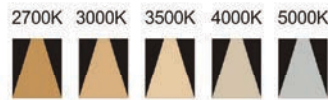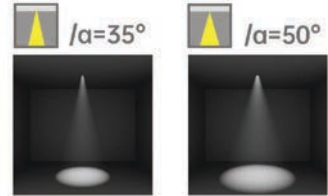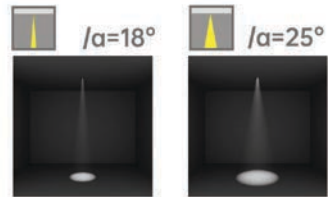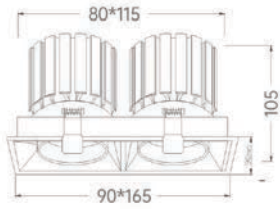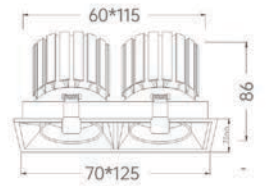





SLF

Product code	SLF06010S2	SLF08015S2
Power (W)	10W*2	15W*2
Lumen (Lm)	450*2	700*2
Size (mm)	70x125x86	90x165x105
Cut-off (mm)	60x115	80x155
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners



Light distribution curve

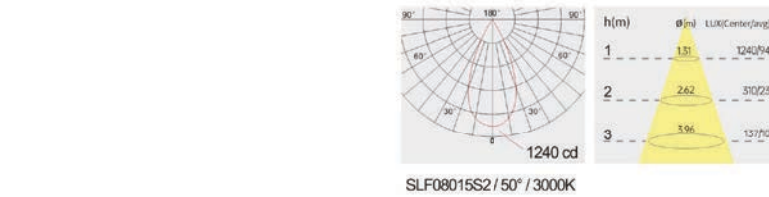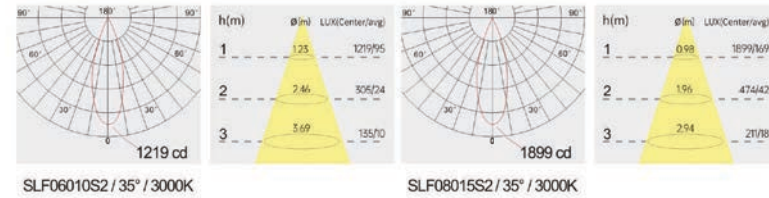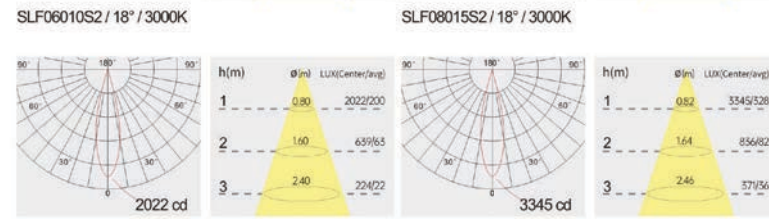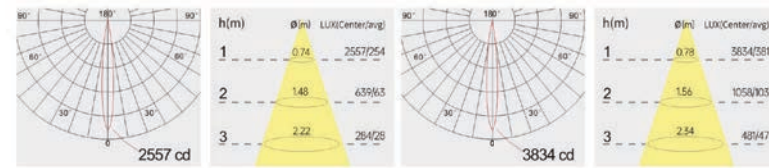

Optical fittings



Product close-up







SLF

Product code	SLF10030S2	SLF12540S2
Power (W)	30W*2	40W*2
Lumen (Lm)	2000*2	3600*2
Size (mm)	220x110x132	275x138x125
Cut-off (mm)	100x200	125x255
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners








Light distribution curve

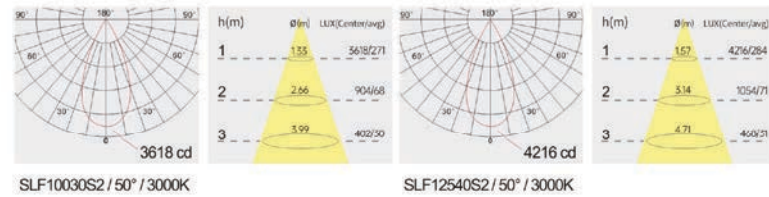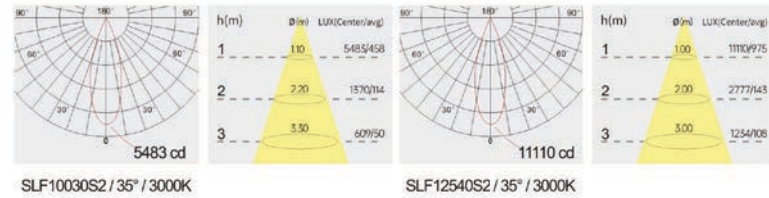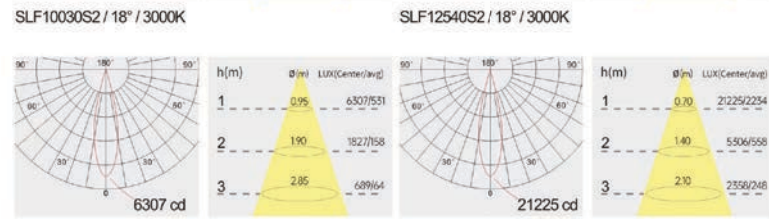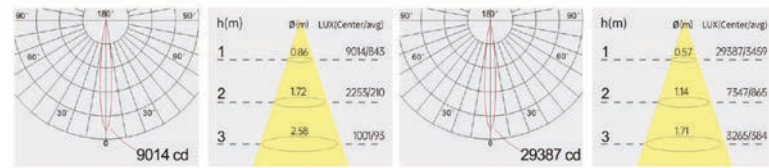

Optical fittings



Product close-up

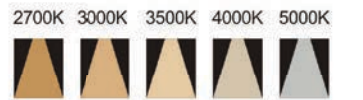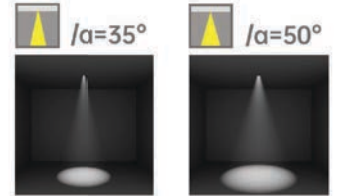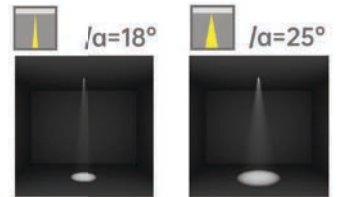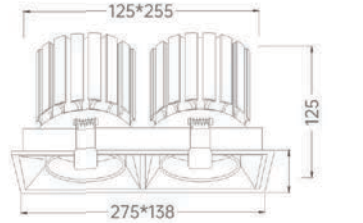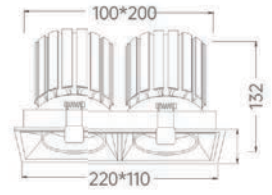

silux

Journey

According to the trend of The Times, the modern and recognized decoration style to use narrow edge minimalist design, anti-glare energy-saving and eye protection, see the light can not see the lamp concept, the space becomes more simple, make life more comfortable and wonderful.






SLEL

Product code	SLEL1030
Power (W)	30W
Lumen (Lm)	2600
Size (mm)	Ø110x140
Cut-off (mm)	Ø100
Voltage	220-240V / 100-277V
PF	>0.9
CRI	83 / 90 / 95 / Thrive
Color	Black / White / Customized


Strategic partners




Light distribution curve

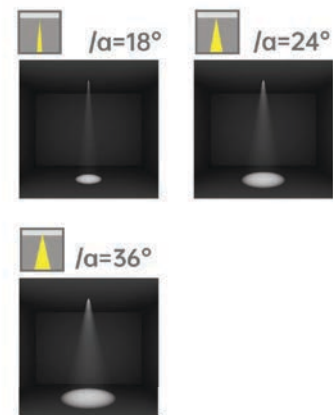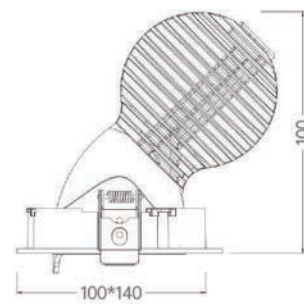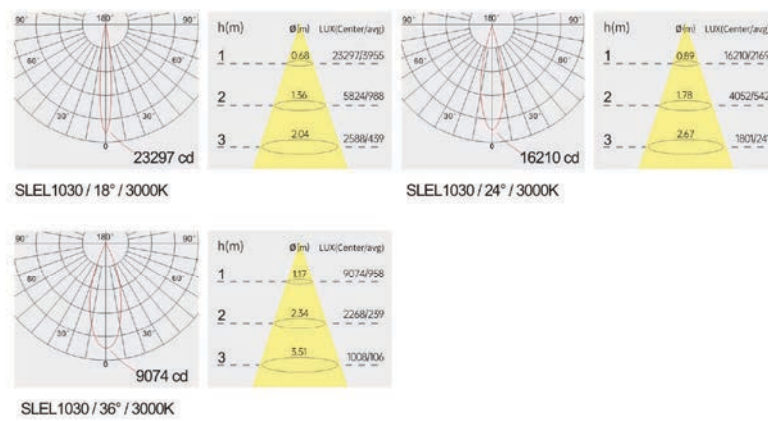

Optical fittings

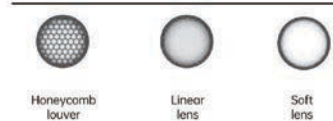

Product close-up

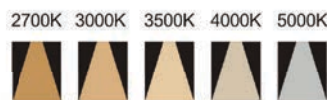





MSE





Product code	MSE07510	MSE10015	MSE12824
Power (W)	10W	15W	24W
Lumen (Lm)	600	1000	2200
Size (mm)	Ø95x70	Ø114x95	Ø138x120
Cut-off (mm)	Ø75	Ø100	Ø128
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners



Light distribution curve

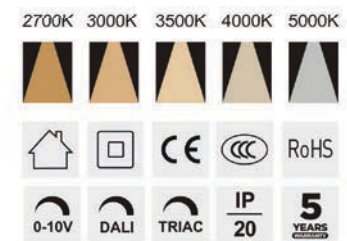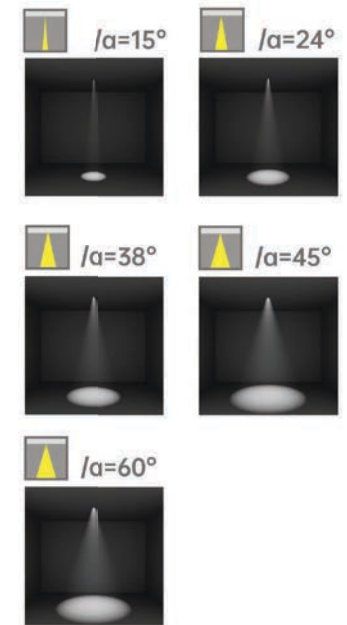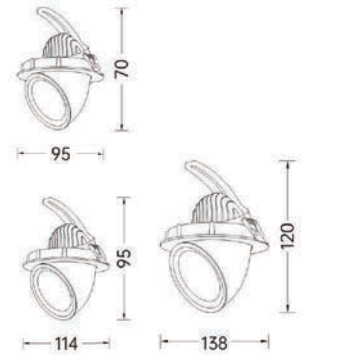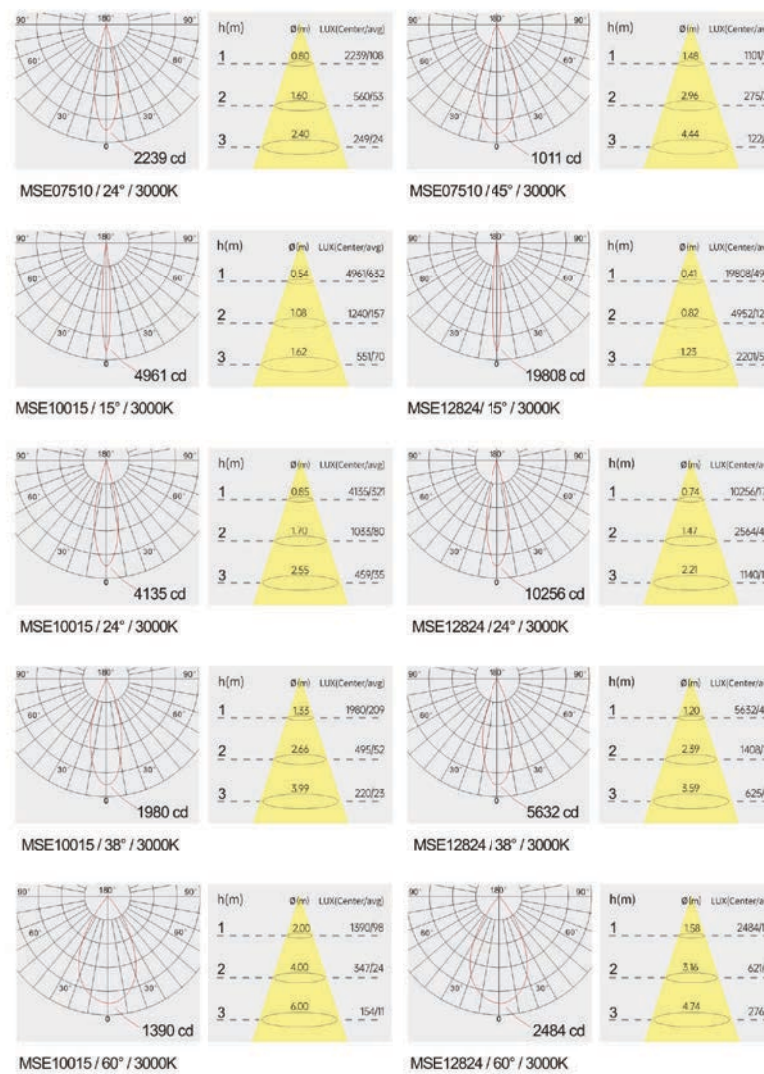

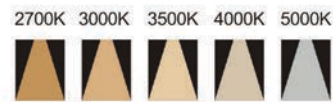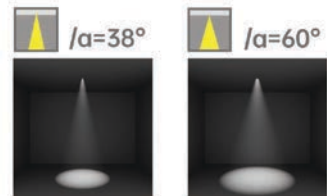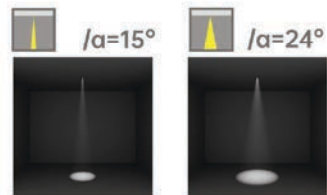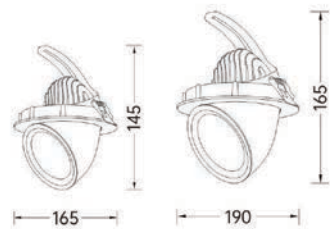


MSE

Product code	MSE15035	MSE17550
Power (W)	35W	50W
Lumen (Lm)	3000	4500
Size (mm)	Ø165x145	Ø190x165
Cut-off (mm)	Ø150	Ø175
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners




Light distribution curve

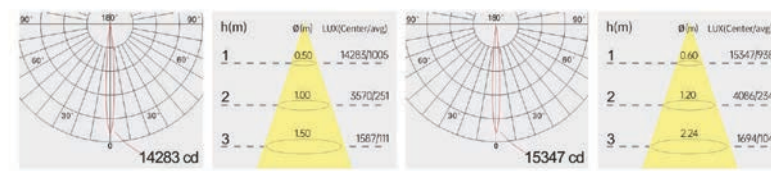


MSE15035 / 15° / 3000K

MSE17550 / 15° / 3000K

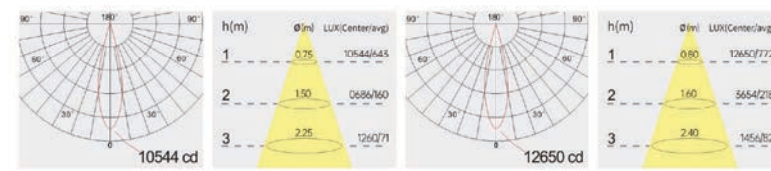


MSE15035 / 24° / 3000K

MSE17550 / 24° / 3000K

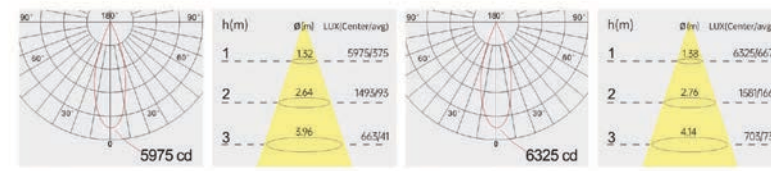

MSE15035 / 38° / 3000K

MSE17550 / 38° / 3000K

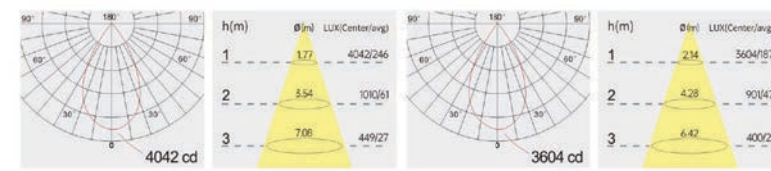

MSE15035 / 60° / 3000K

MSE17550 / 60° / 3000K

Optical fittings



Product close-up





silux

GALLERY

According to the trend of The Times, the modern and recognized decoration style to use narrow edge minimalist design, anti-glare energy-saving and eye protection, see the light can not see the lamp concept, the space becomes more simple, make life more comfortable and wonderful.



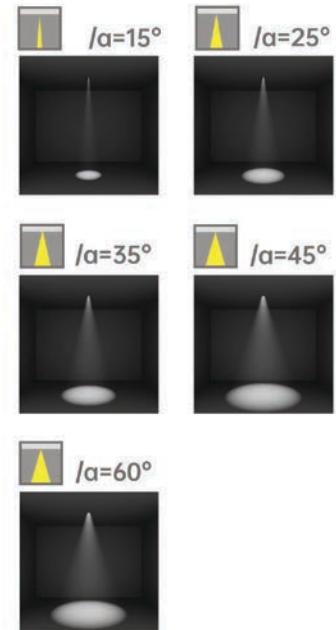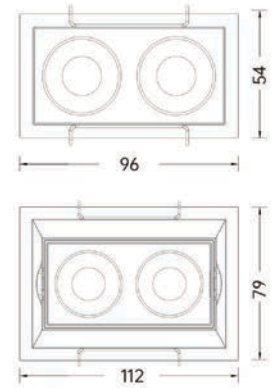


SLOB

Product code	OB-602A	OB-602C
Power (W)	6W	6W
Lumen (Lm)	400	400
Size (mm)	96x54x55	112x79x72
Cut-off (mm)	88x46	103x70
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners



Light distribution curve

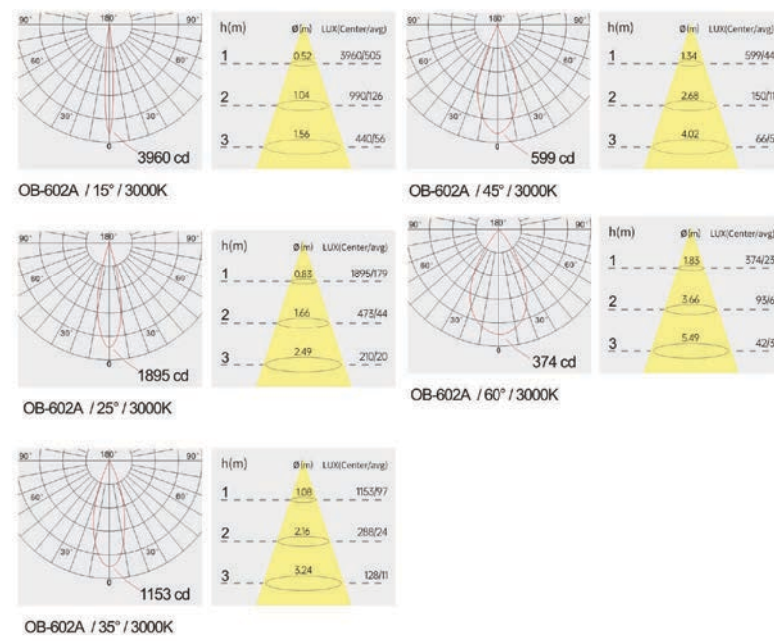

Optical fittings



Product close-up




SLOB

Product code	OB-1204A	OB-1204C
Power (W)	12W	12W
Lumen (Lm)	800	800
Size (mm)	178x54x55	195x79x72
Cut-off (mm)	170x46	187x70
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners






Light distribution curve


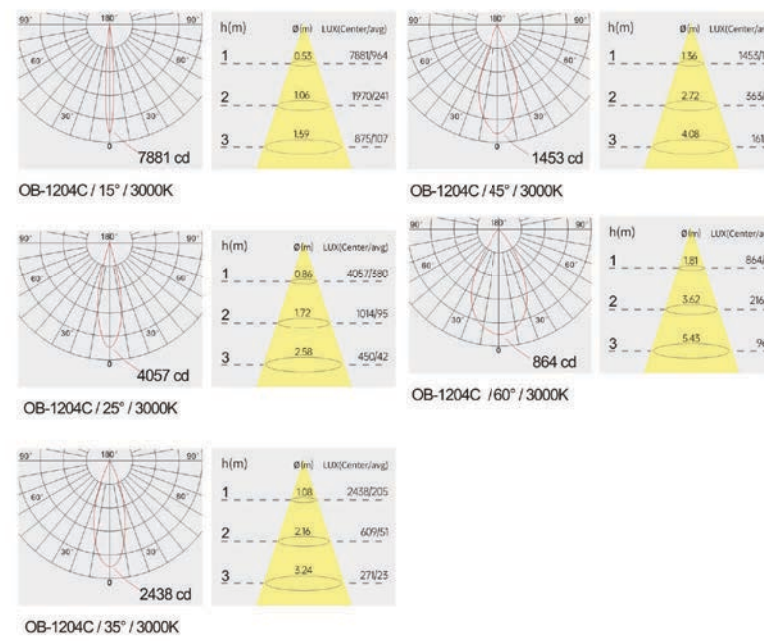


Optical fittings



Product close-up

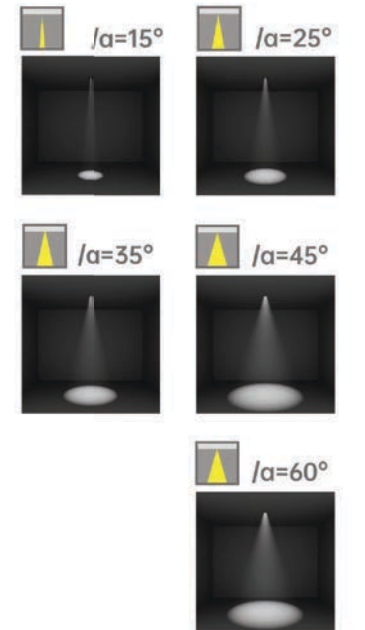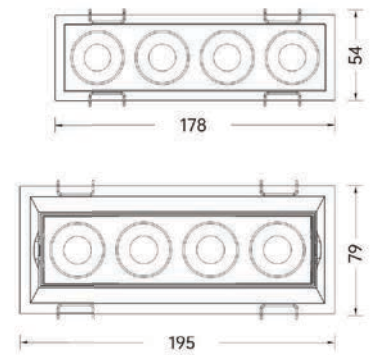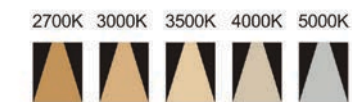

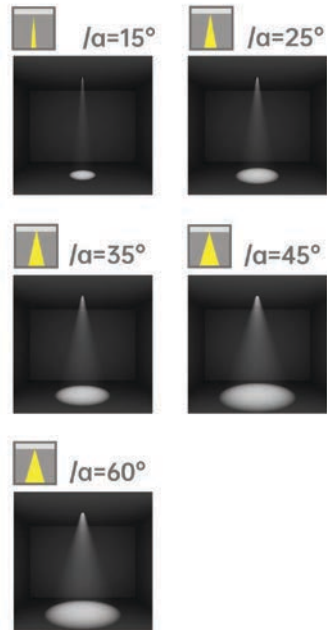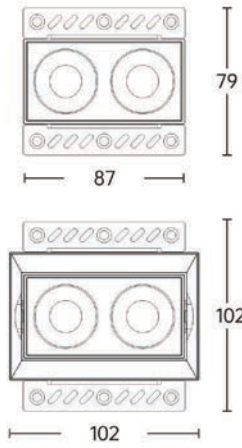


SLOB

Product code	OB-602AT	OB-602CT
Power (W)	6W	6W
Lumen (Lm)	400	400
Size (mm)	87x79x55	102x102x72
Cut-off (mm)	88x50	103x74
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners




Light distribution curve

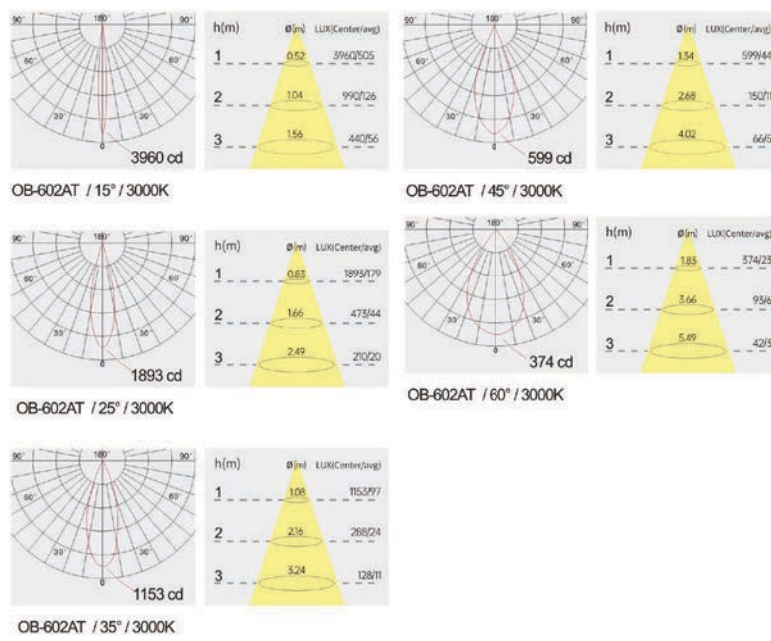

Optical fittings



Product close-up

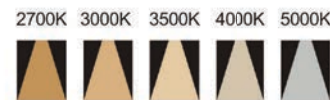


SLOB

Product code	OB-1204AT	OB-1204CT
Power (W)	12W	12W
Lumen (Lm)	800	800
Size (mm)	170x79x55	185x102x72
Cut-off (mm)	170x50	187x74
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners






Light distribution curve



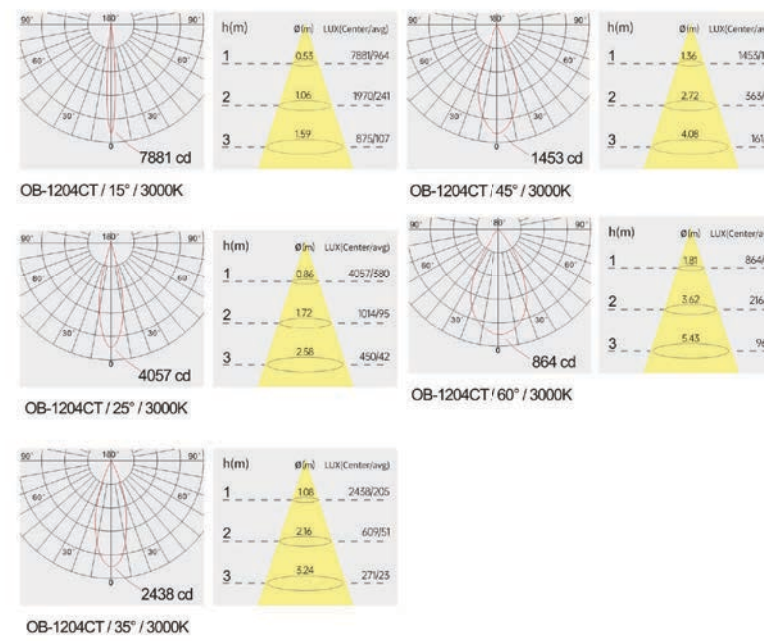


Optical fittings



Product close-up

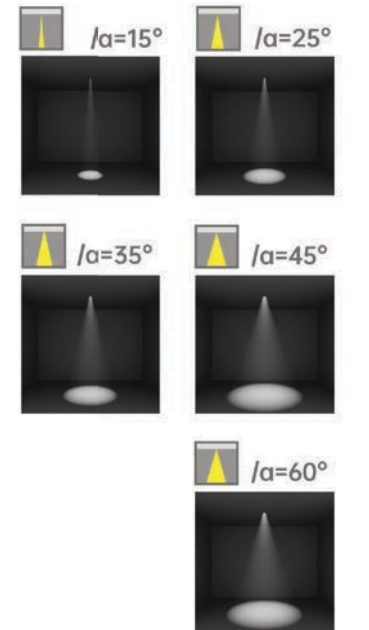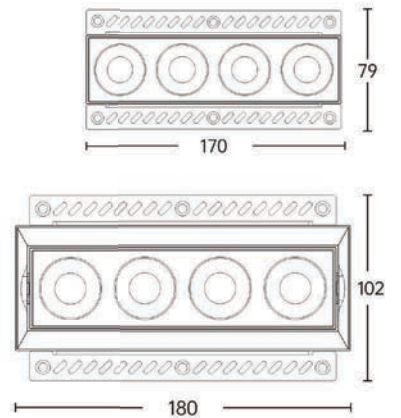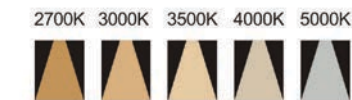

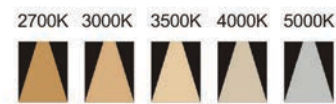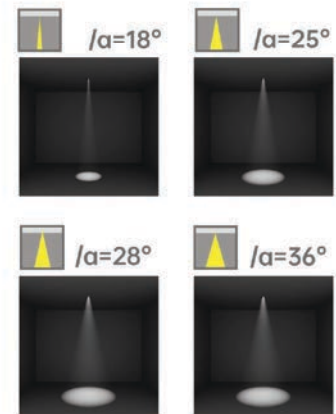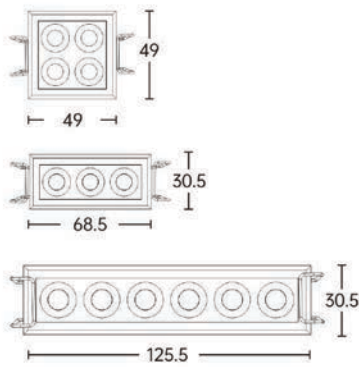


SMX

Product code	SMXT03	SMXT04	SMXT06
Power (W)	4W	5W	8W
Lumen (Lm)	280	350	560
Size (mm)	68.5x30.5x35.6	49.5x49.5x35.6	125.5x30.5x35.6
Cut-off (mm)	64x26	45x45	121x26
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners



Light distribution curve

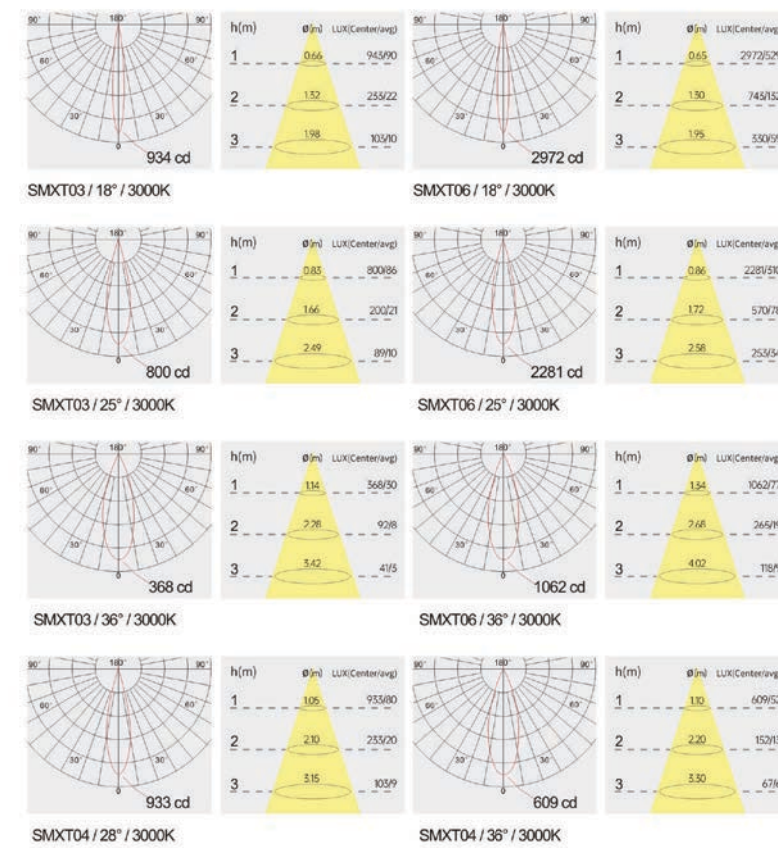


SMX

Product code	SMXT09	SMXT12
Power (W)	10W	15W
Lumen (Lm)	700	1050
Size (mm)	68.5x68.5x35.6	239.5x30.5x35.6
Cut-off (mm)	64x64	235x26
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	



Strategic partners



Light distribution curve

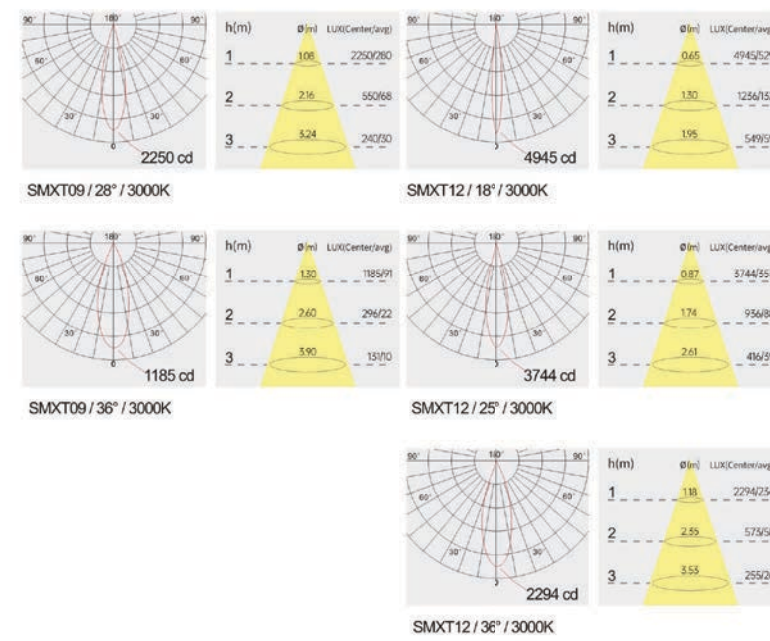

Optical fittings

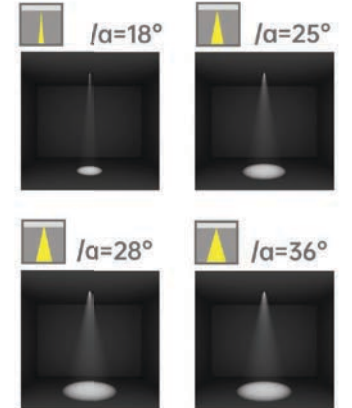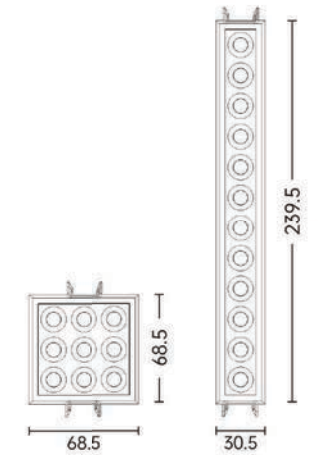





SMX

Product code	SMXT16	SMXT25
Power (W)	18W	25W
Lumen (Lm)	1260	1750
Size (mm)	87.5x87.5x35.6	106x106x35.6
Cut-off (mm)	83x83	102x102
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	



Strategic partners



Light distribution curve

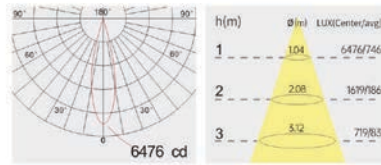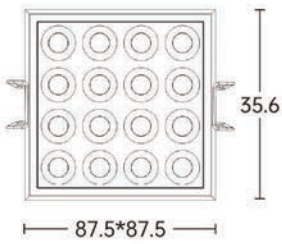

SMXT25 / 28° / 3000K

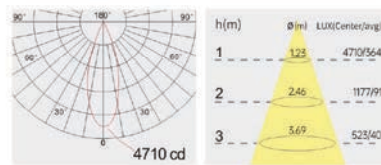
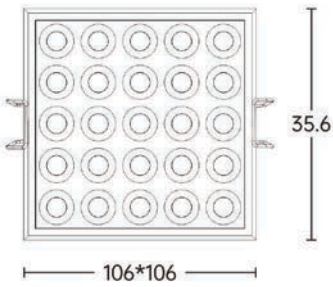


SMXT25 / 36° / 3000K

Optical fittings



Product close-up

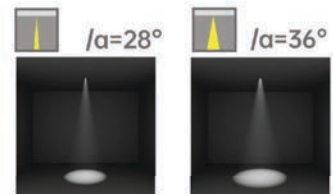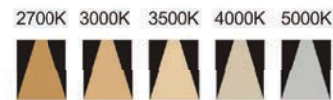


SMX

Product code	SMXM04	SMXM09
Power (W)	5W	10W
Lumen (Lm)	350	700
Size (mm)	62x62x62	81x81x81
Cut-off (mm)	62x62x62	81x81x81
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners




Light distribution curve

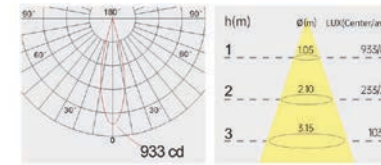


SMXM04 / 28° / 3000K

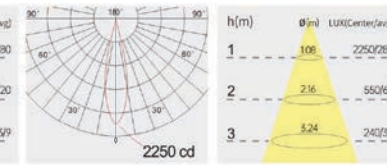

SMXM09 / 26° / 3000K

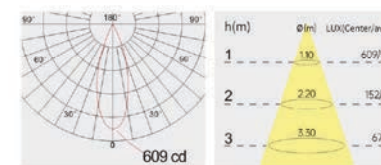


SMXM04 / 36° / 3000K




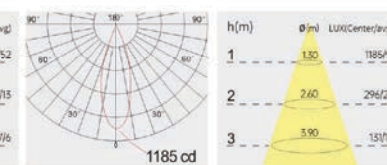





SMXM09 / 36° / 3000K

Optical fittings

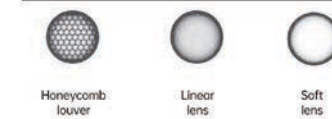

Product close-up

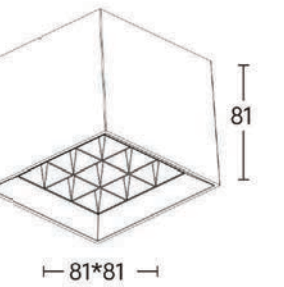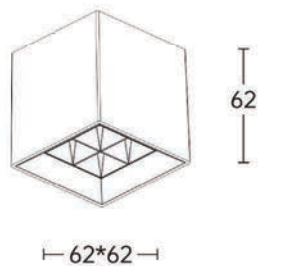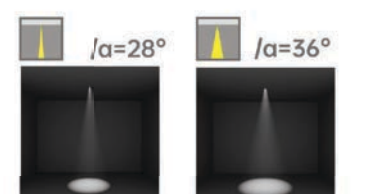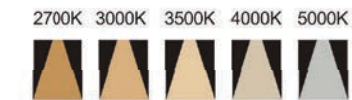

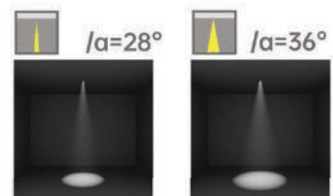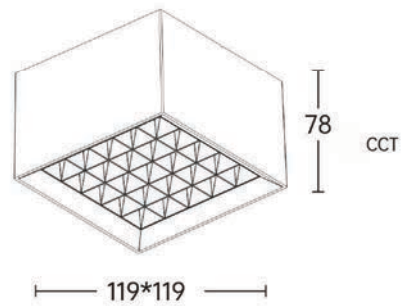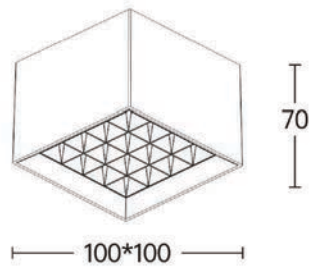


SMX

Product code	SMXM16	SMXM25
Power (W)	18W	25W
Lumen (Lm)	1260	1750
Size (mm)	100x100x70	119x119x78
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners



Light distribution curve

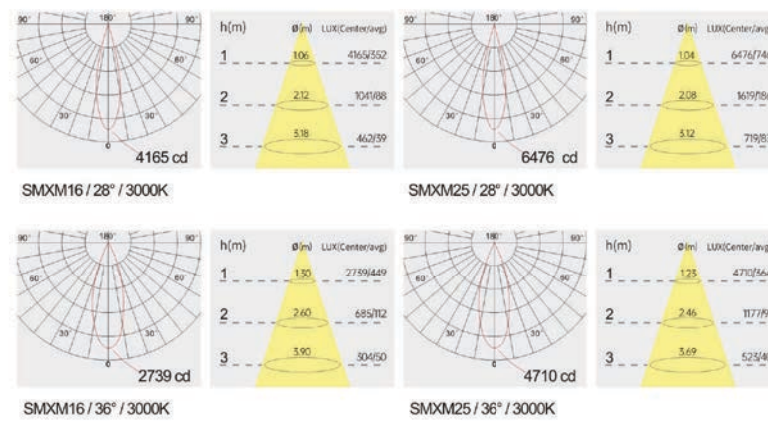


Optical fittings




Product close-up



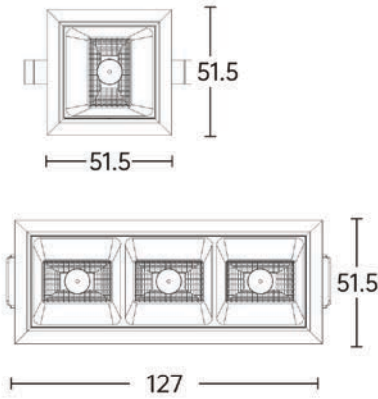

Product close-up

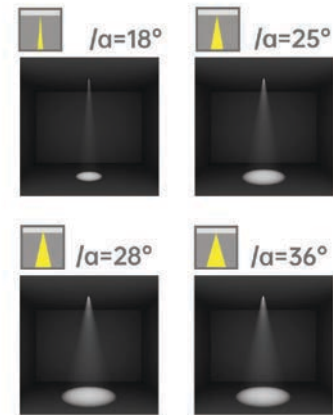




SMJ

Product code	SMJT01	SMJT03
Power (W)	5W	12W
Lumen (Lm)	350	1050
Size (mm)	L51.5x51.5xH56	L127x51.5xH56
Cut-off (mm)	43x43	120x43
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners



Light distribution curve

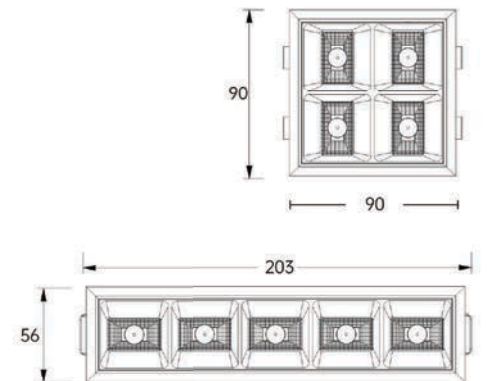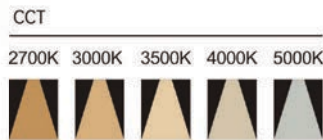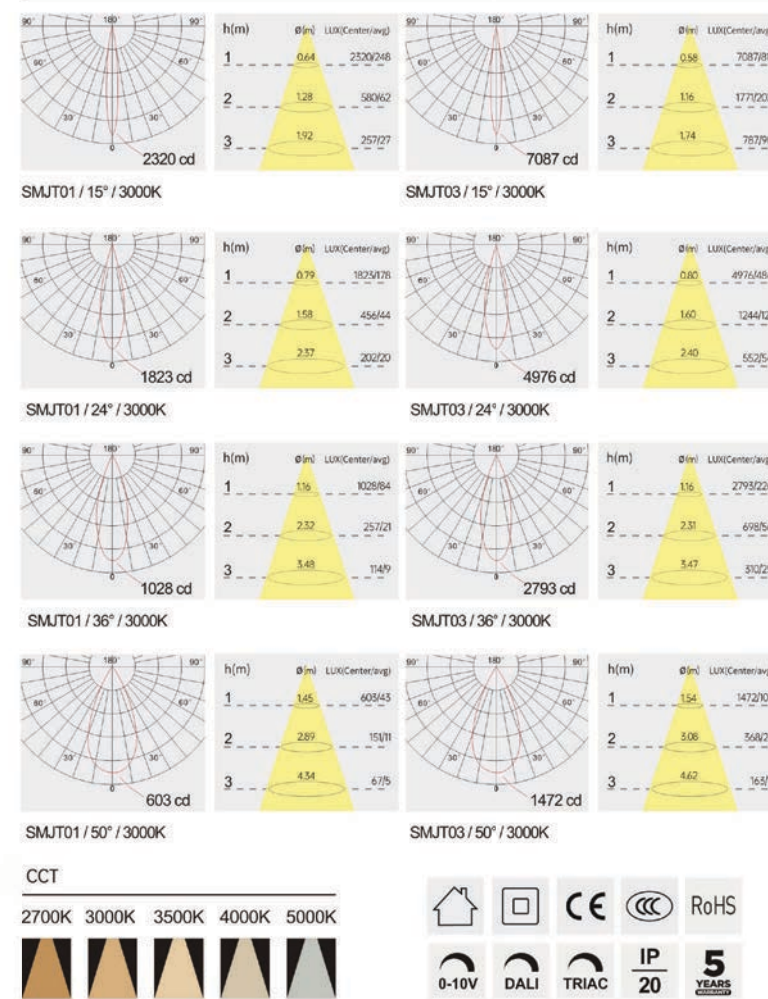

Product close-up

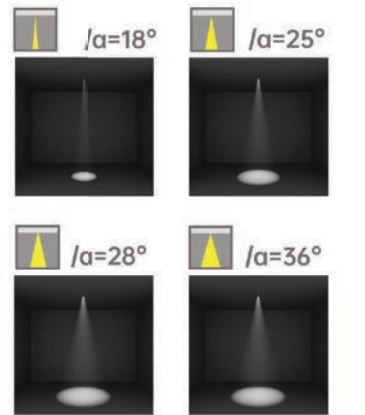




SMJ




Product code	SMJT04	SMJT05
Power (W)	15W	20W
Lumen (Lm)	1250	1750
Size (mm)	L90x90xH56	L203x51.5xH56
Cut-off (mm)	82x82	196x43
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners



Light distribution curve

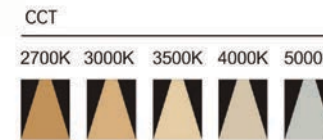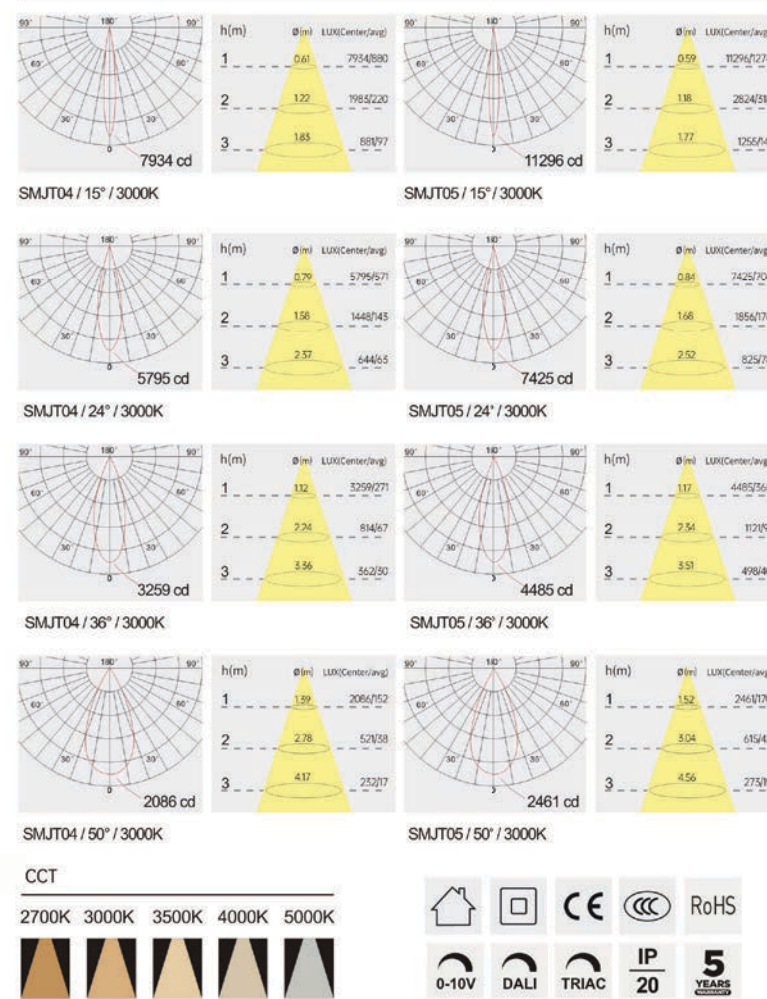

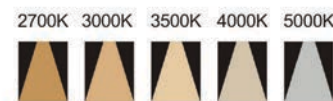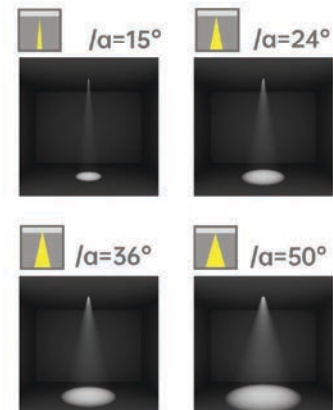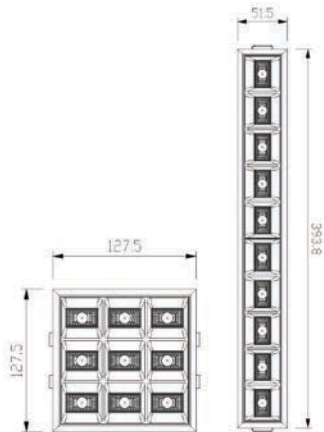


SMJ

Product code	SMJT09	SMJT10
Power (W)	36W	40W
Lumen (Lm)	3100	3500
Size (mm)	L128x128xH56	L393x51.5xH56
Cut-off (mm)	120x120	386x43
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners



Light distribution curve

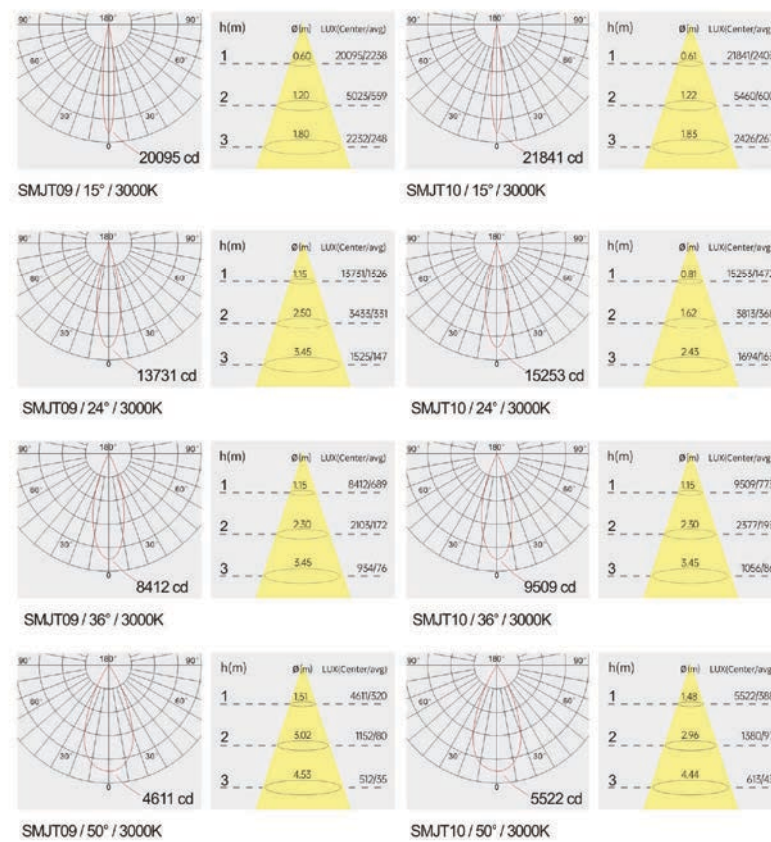

Optical fittings



Product close-up




SMJ

Product code	SMJM01	SMJM03
Power (W)	5W	12W
Lumen (Lm)	350	1050
Size (mm)	42x42x66	120x42x66
Voltage	220-240V / 100-277V	
PF	>0.5	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners








Light distribution curve






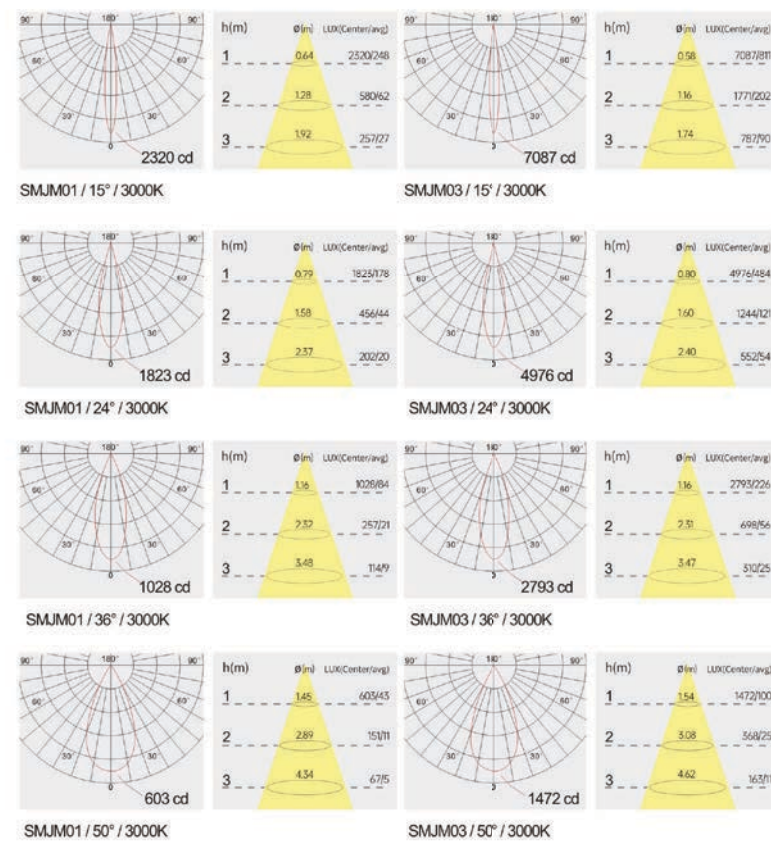


Optical fittings



Product close-up

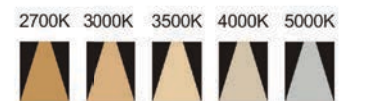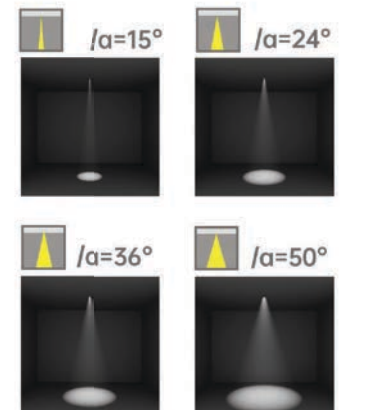

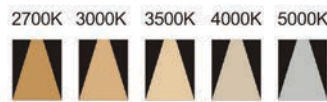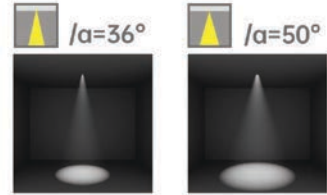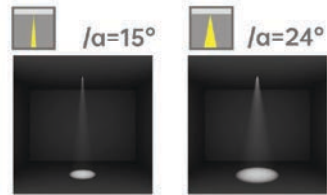


SMJ

Product code	SMJM04	SMJM05
Power (W)	15W	20W
Lumen (Lm)	1250	1750
Size (mm)	82*82*66	195x42x66
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners




Light distribution curve

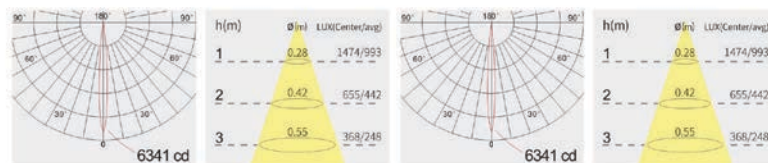


A1 / 15° / 3000K

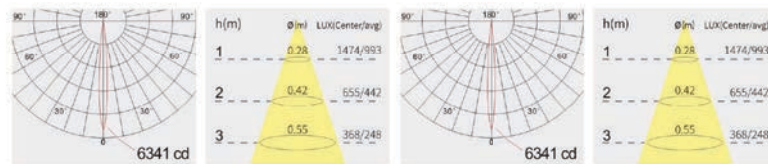

A1 / 15° / 3000K

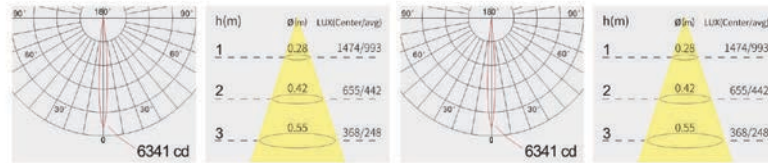

A1 / 15° / 3000K

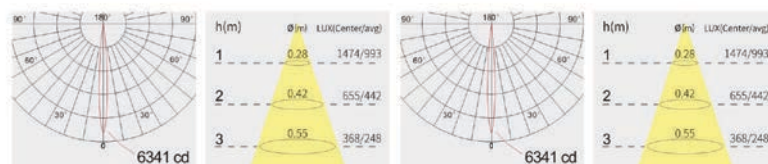


A1 / 15° / 3000K

Optical fittings



Product close-up




SMJ

Product code	SMJM09	SMJM10
Power (W)	36W	40W
Lumen (Lm)	3100	3500
Size (mm)	120x120x66	385x42x66
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners




Light distribution curve

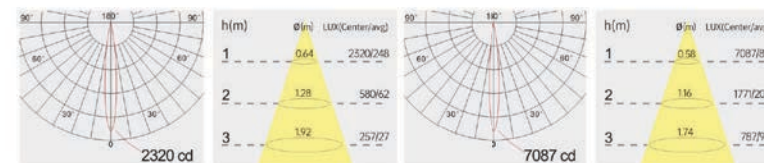


SMJM01 / 15° / 3000K

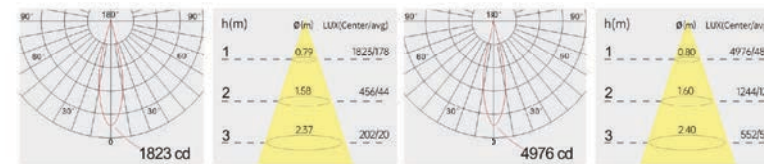

SMJM03 / 15° / 3000K

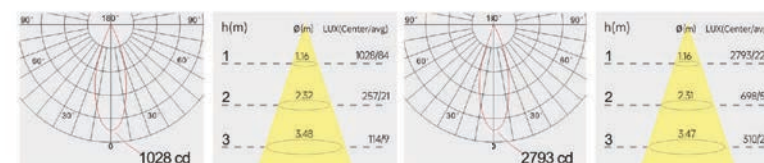

SMJM01 / 24° / 3000K

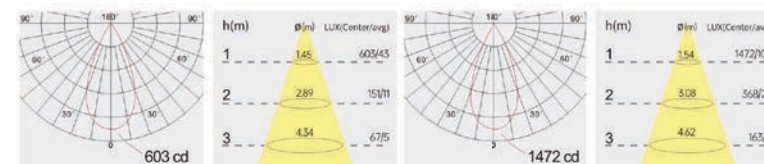

SMJM03 / 24° / 3000K












SMJM01 / 36° / 3000K







SMJM03 / 36° / 3000K

Optical fittings

Product close-up

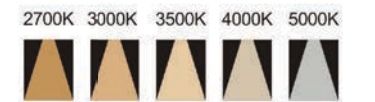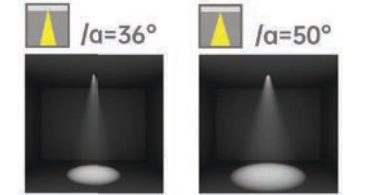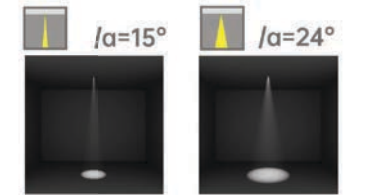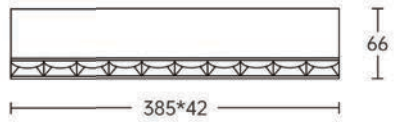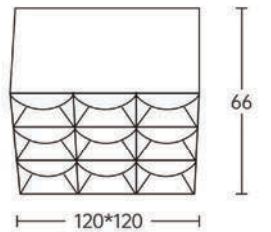

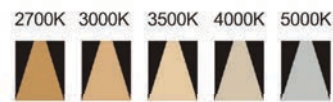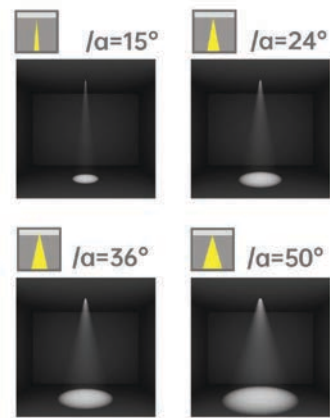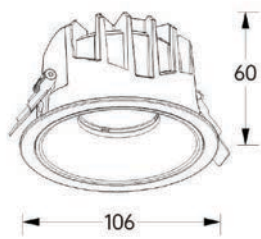


SLJG

Product code	SLJG07510	SLJG09018
Power (W)	10W	18W
Lumen (Lm)	650	1300
Size (mm)	Ø86xH55	Ø106xH60
Cut-off (mm)	Ø75	Ø90
Voltage	220-240V / 100-277V	
PF	>0.5 / >0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners



Light distribution curve

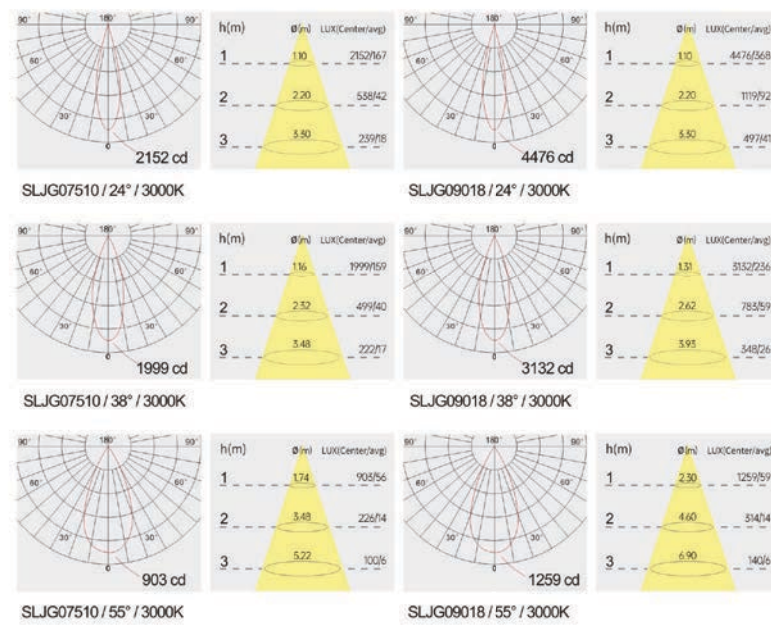

Optical fittings




Product close-up




SLJG

Product code	SLJG12530	SLJG16540	SLJG20050
Power (W)	30W	40W	50W
Lumen (Lm)	2600	3600	4200
Size (mm)	Ø140xH73	Ø180xH94	Ø214xH110
Cut-off (mm)	Ø125	Ø165	Ø200
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		





Strategic partners

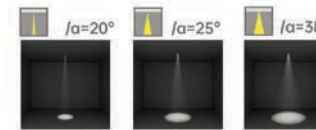

产品特写 / Product close-up

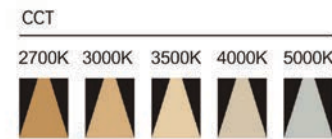

Light distribution curve

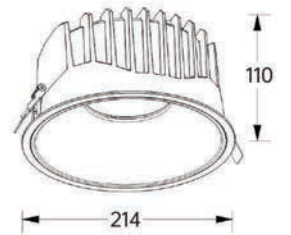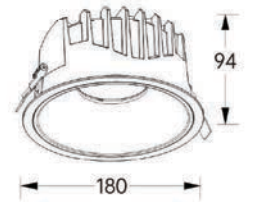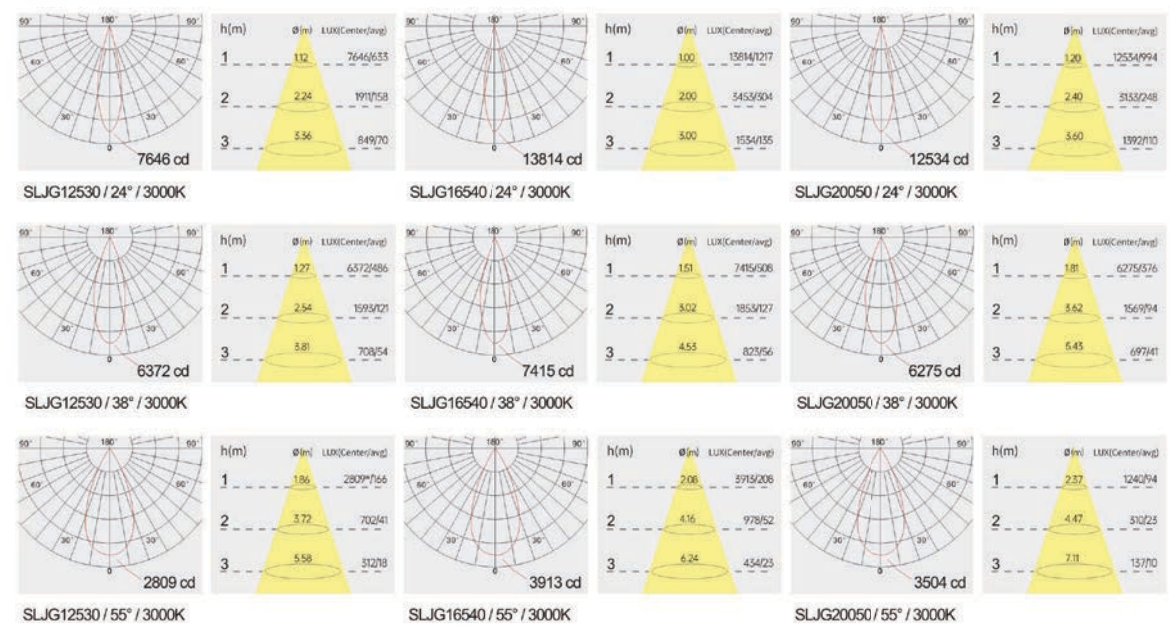




IP65

Not afraid of water/fog/oil/smoke can be used in the hotel, ballroom.
The lamp has passed 500 hours of salt spray testing and IP65 waterproof testing

Product code	SLSA03507	SLSA04507
Power (W)	7W	7W
Lumen (Lm)	400	400
Size (mm)	Ø40xH85	Ø52xH72
Cut-off (mm)	Ø35	Ø45
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners

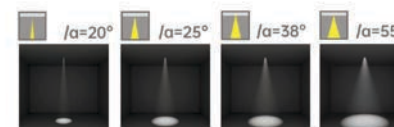




Product close-up





CCT

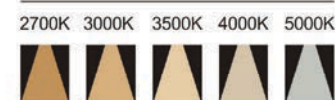

Light distribution curve

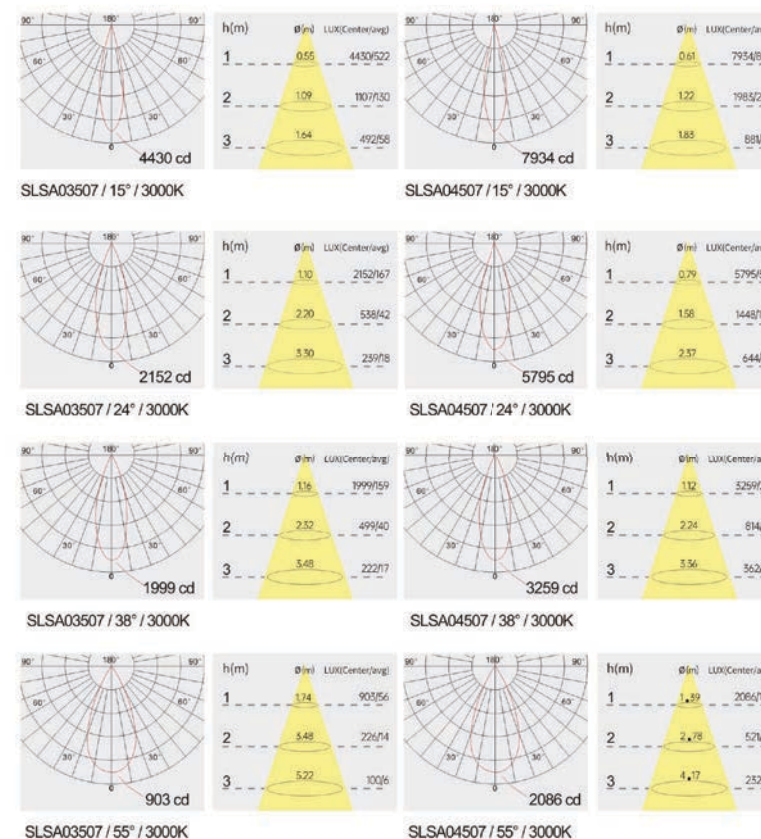






SLSA

Product code	SLSA05509	SLSA06512
Power (W)	9W	12W
Lumen (Lm)	600	800
Size (mm)	Ø62xH77	Ø73xH80
Cut-off (mm)	Ø55	Ø65
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners

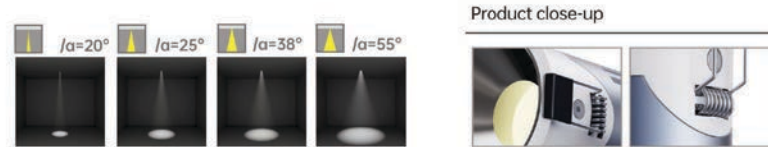

CCT

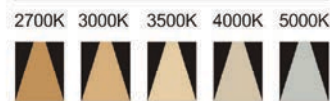


Light distribution curve

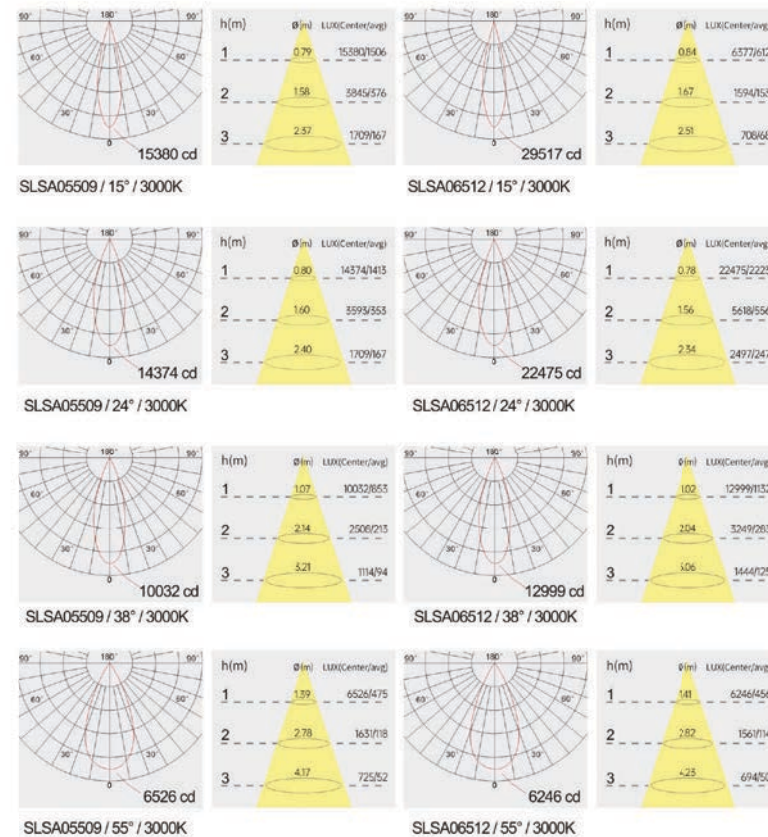

SLSA

Product code	SLSA07515	SLSA09525	SLSA12035
Power (W)	15W	25W	35W
Lumen (Lm)	1100	2000	3000
Size (mm)	Ø84xH85	Ø103xH110	Ø130xH135
Cut-off (mm)	Ø75	Ø95	Ø120
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		





Strategic partners

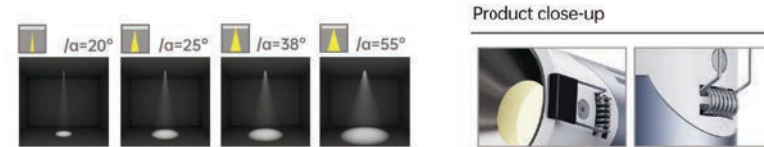

CCT



Light distribution curve


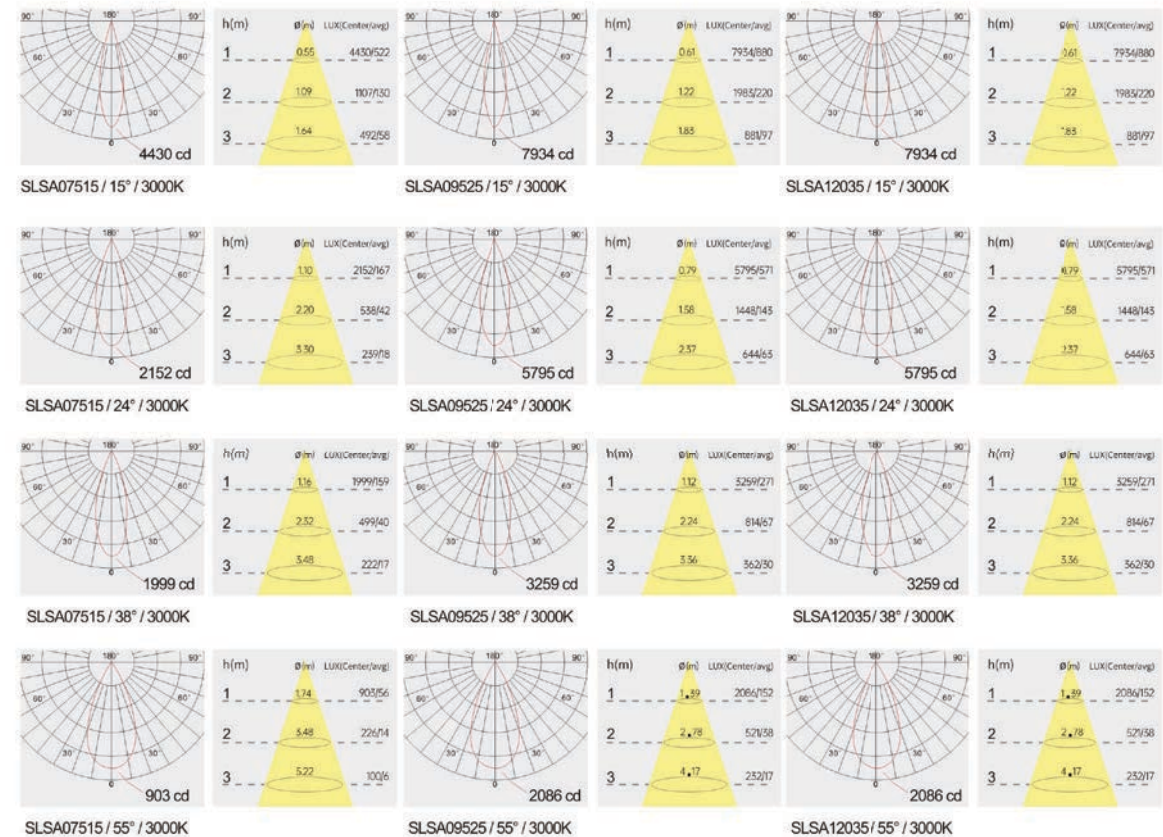


Waterproof


SLWF

Product code	SLWF07510	SLWF09515	SLWF11520
Power (W)	10W	15W	20W
Lumen (Lm)	650	1250	1600
Size (mm)	Ø85xH54	Ø105xH65	Ø131xH75
Cut-off (mm)	Ø75	Ø95	Ø115
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		


Strategic partners

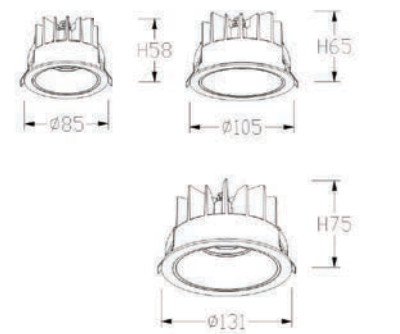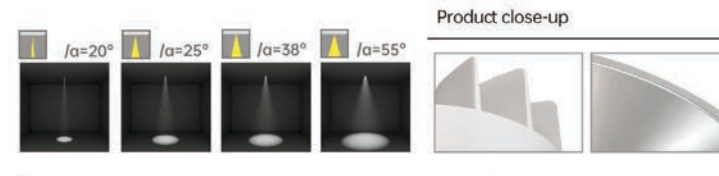

CCT



Light distribution curve



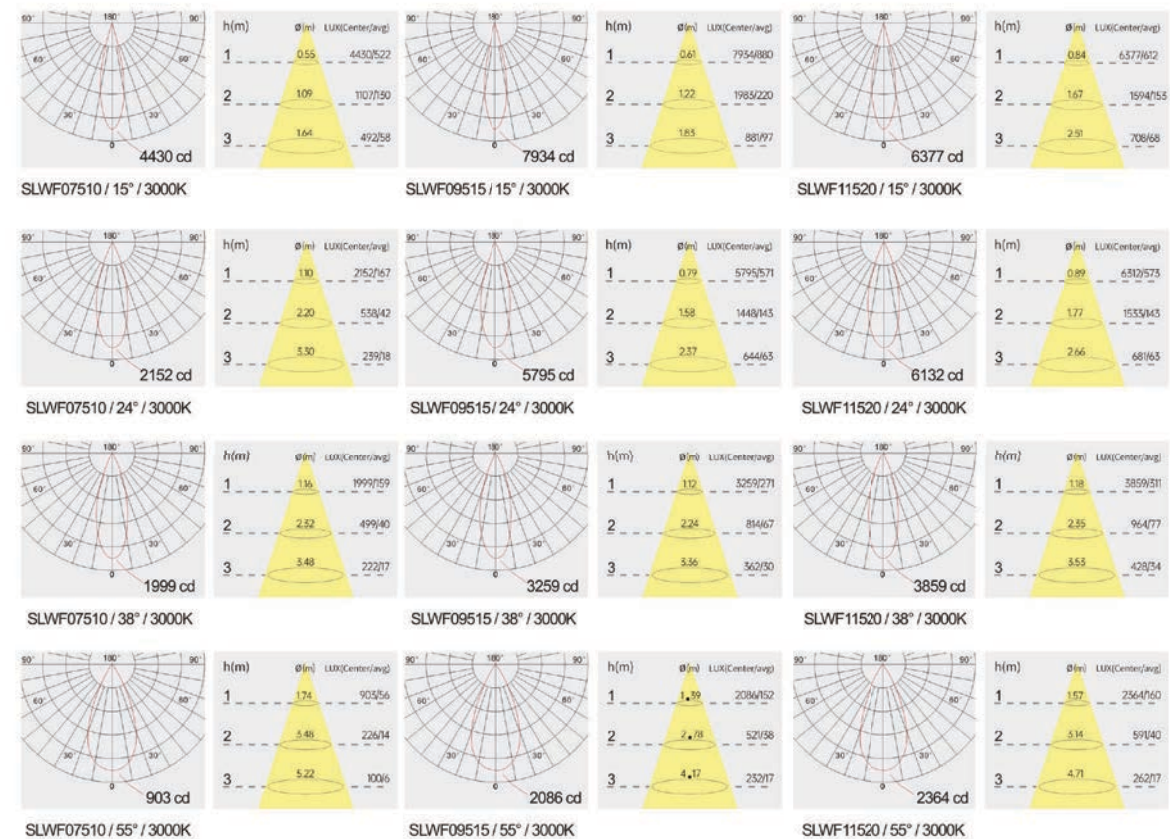





Product code	SLWF13530	SLWF17540	SLWF20050
Power (W)	30W	40W	50W
Lumen (Lm)	2900	3600	4800
Size (mm)	Ø150xH80	Ø190xH95	Ø215xH105
Cut-off (mm)	Ø135	Ø175	Ø200
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners

LED
 Driver

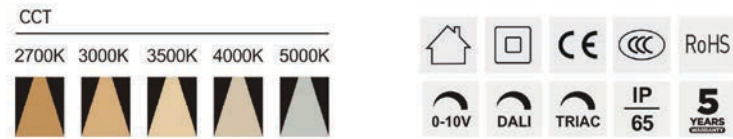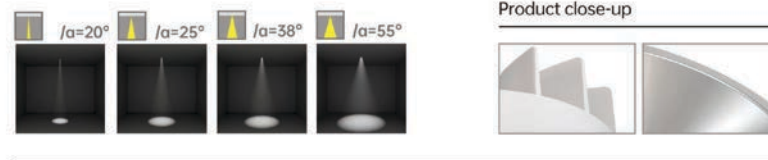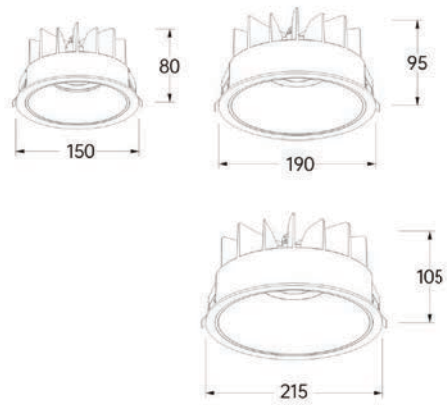

Light distribution curve

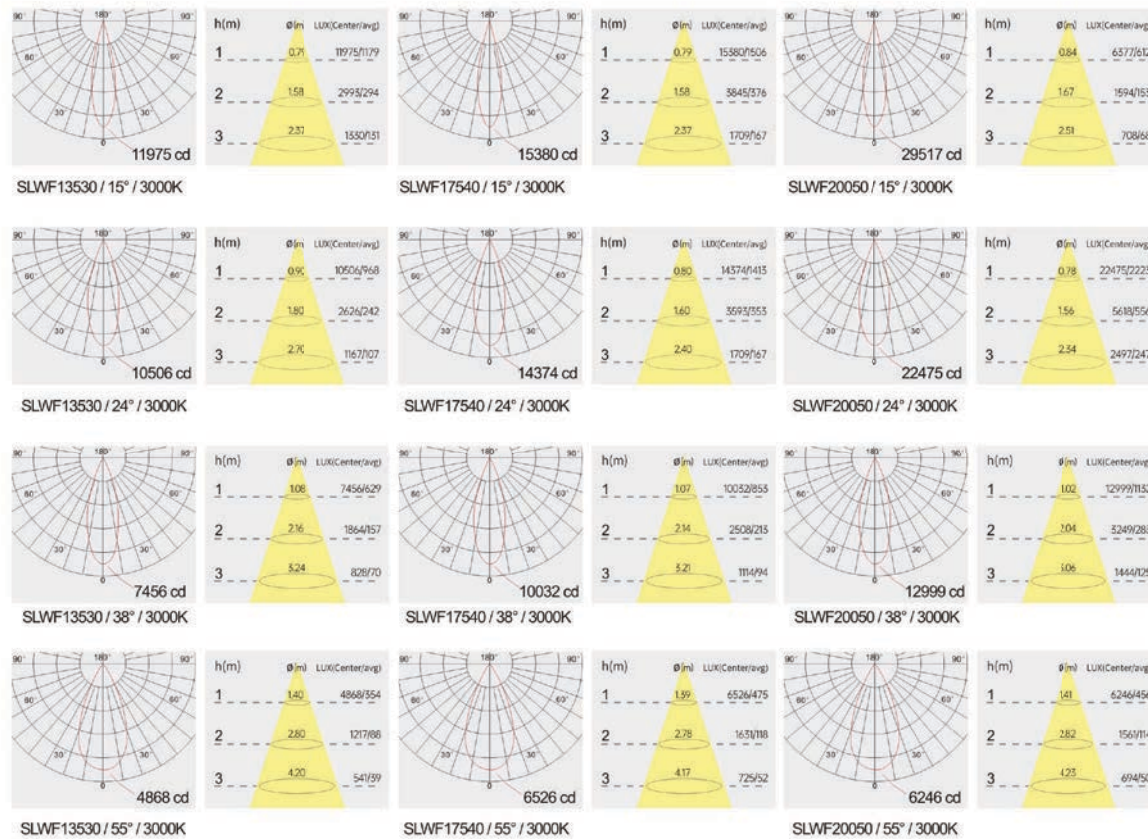

Multiple splicing wall wash

Seamless splicing wall washing, light spot uniform transition, no bright and dark stripes




SLKE

Product code	SLKE05507	SLKE07512	SLKE09520
Power (W)	7W	12W	20W
Lumen (Lm)	500	1100	1800
Size (mm)	Φ62*H82	Φ80*H84	Φ105*H115
Cut-off (mm)	Ø55	Ø75	Ø95
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	90		
Color	Black / White / Customized		


Strategic partners





Light distribution curve

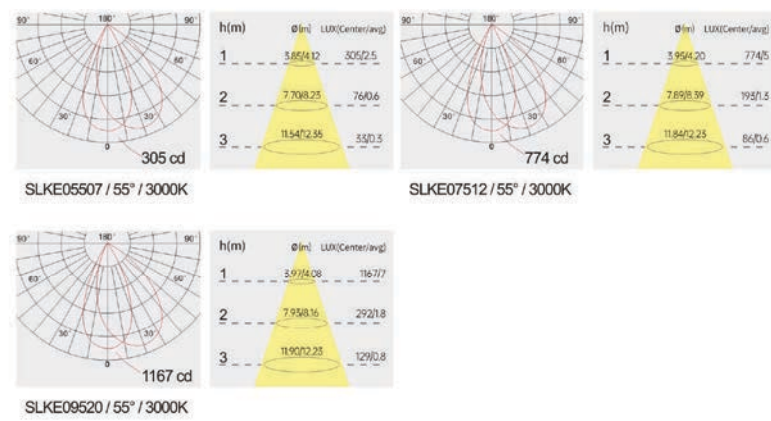

Optical fittings

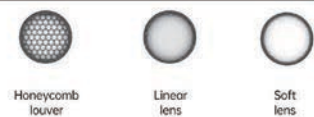

Product close-up

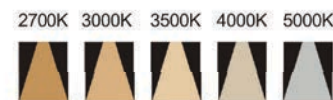


SLE

Product code	SLE07510	SLE09520	SLE12530
Power (W)	10W	20W	30W
Lumen (Lm)	600	1500	2200
Size (mm)	Ø85xH70	Ø108xH70	Ø135xH97
Cut-off (mm)	Ø75	Ø95	Ø125
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners





Light distribution curve



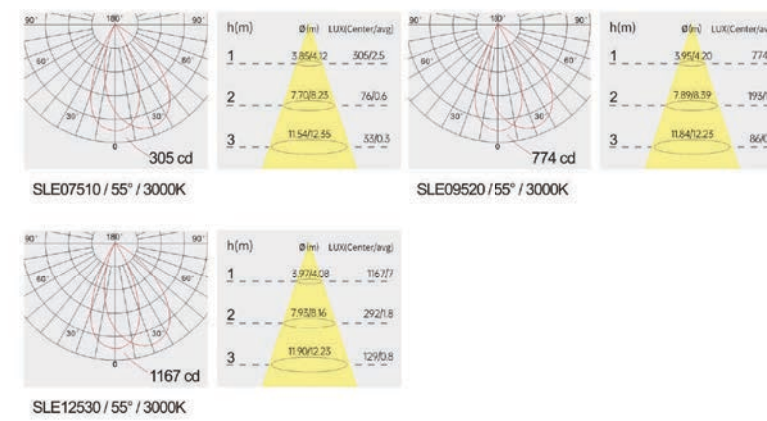


Optical fittings



Product close-up

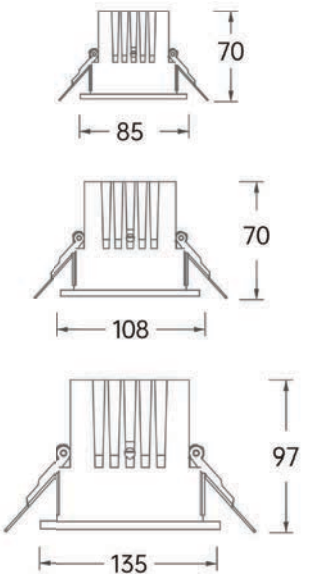

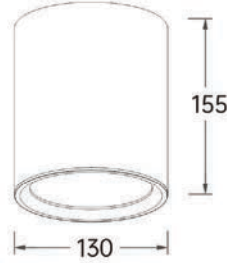


MSC1

Product code	MSC109010	MSC113020
Power (W)	10W	20W
Lumen (Lm)	600	1600
Size (mm)	Ø90xH90	Ø130xH155
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized ↓	

Strategic partners





Light distribution curve

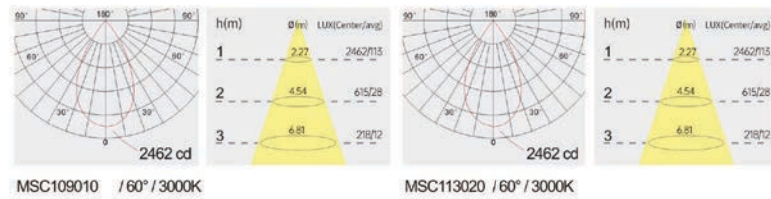

Optical fittings



Product close-up




MSC1

Product code	MSC117030	MSC119340
Power (W)	30W	40W
Lumen (Lm)	2300	3200
Size (mm)	Ø170xH192	Ø195xH200
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners








Light distribution curve



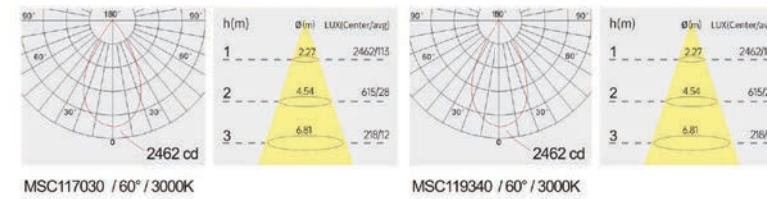


Optical fittings



Product close-up

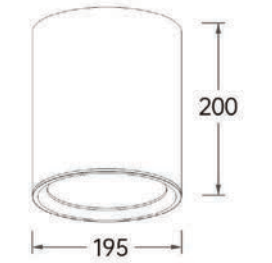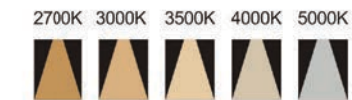

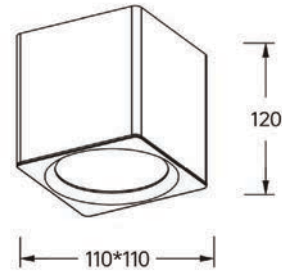


MSC2

Product code	MSC209010	MSC211020
Power (W)	10W	20W
Lumen (Lm)	600	1600
Size (mm)	90x90x90	110x110x120
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners





Light distribution curve

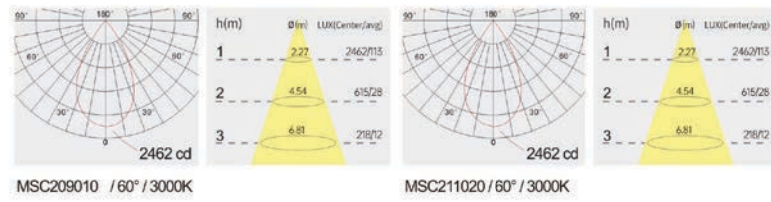

Optical fittings



Product close-up

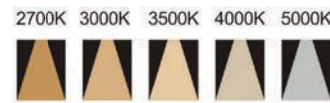


MSC2

Product code	MSC213030	MSC216040
Power (W)	30W	40W
Lumen (Lm)	2300	3200
Size (mm)	130x130x135	160x160x165
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners







Light distribution curve

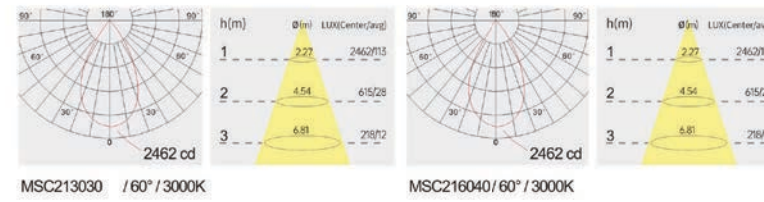


Optical fittings



Product close-up

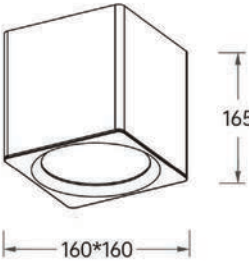

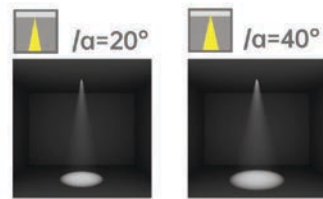


MSD

Product code	MSD2501MA	MSD2501M
Power (W)	10W	15W
Lumen (Lm)	800	1000
Size (mm)	75xH100	75xH152
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners




Light distribution curve

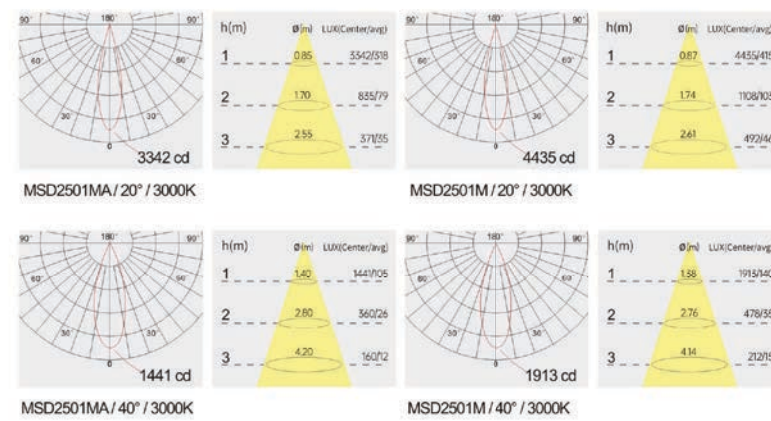

Optical fittings

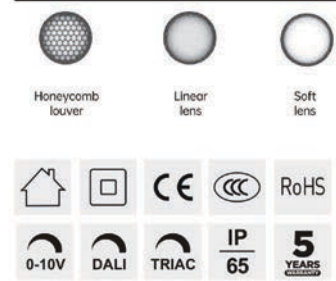

Product close-up

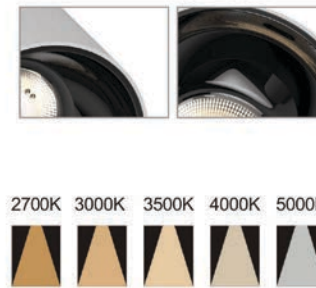


MSD

Product code	MSD3001M	MSD4001M
Power (W)	20W	30W
Lumen (Lm)	1550	2100
Size (mm)	95xH152	115xH152
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners






Light distribution curve



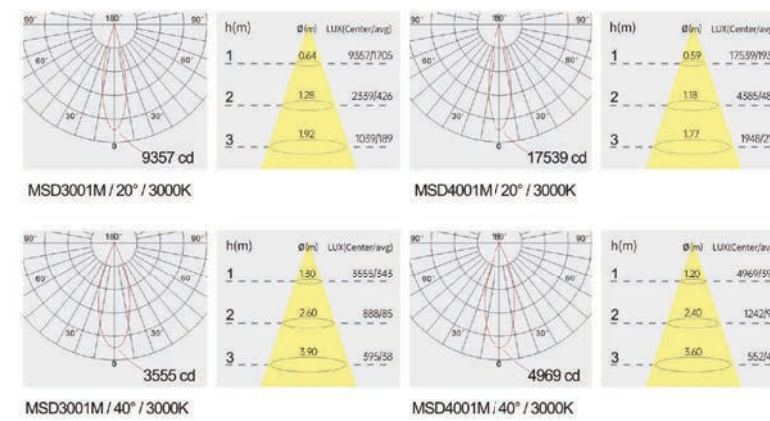


Optical fittings

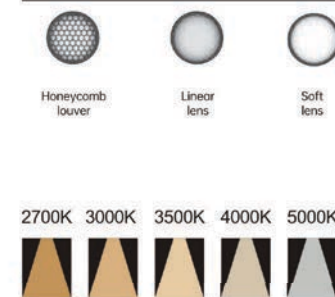

Product close-up

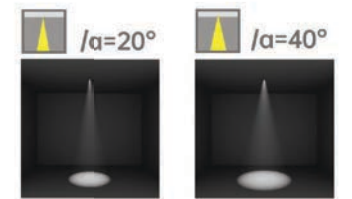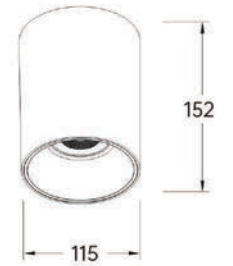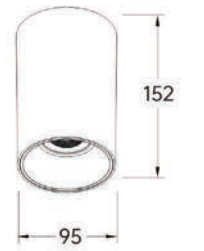

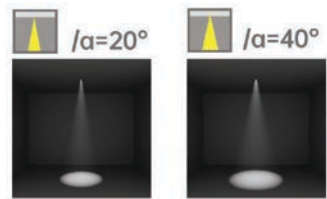


MSD

Product code	MSD5001M	MSD6001M
Power (W)	40W	60W
Lumen (Lm)	3250	4300
Size (mm)	Ø140xH162	Ø170xH182
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners



Light distribution curve

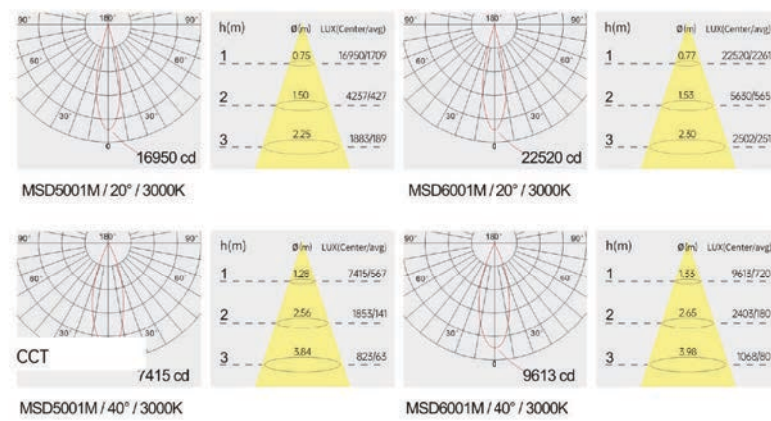

Optical fittings



Product close-up



IP65





EVEREST

P183-188



SL990A



SL990B



SL990C

STL

P189-190



STL A



STL B




STL T



STL P

CAMARO

P191-194



SL991M




SL991UB



SL991UT

MUSTANG

P195-198



SL931



SL931L



SL931G



SL931GL

TEREX

P199-204



SL992S



SL992A



SL992B




SL992B

HUMMER P205

REIZ

P207-212



SL918



SL926




SL926G

PRADO

P213-218

RIO

P219-220




SL925



SL925G



SL27100

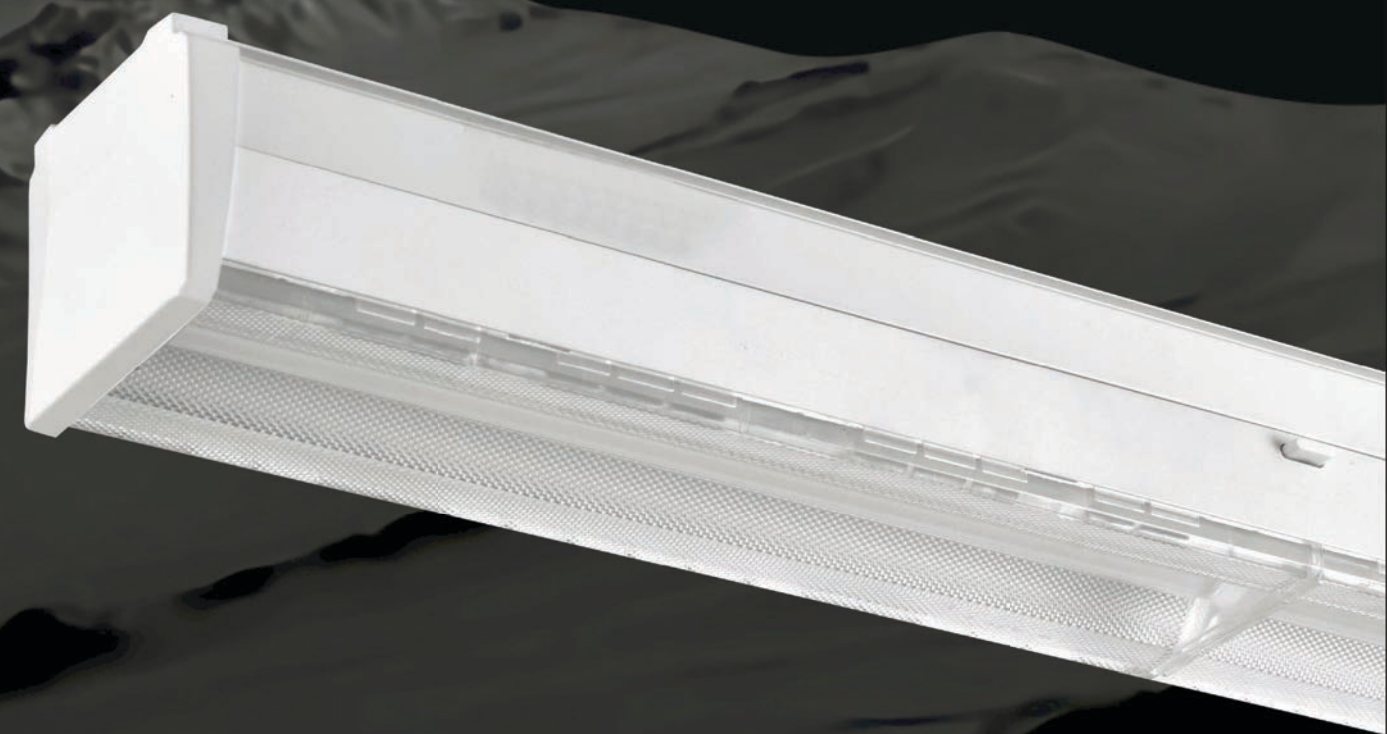


Everest Trunk linear light system, Specially for Supermarket and Warehouse. High luminous efficiency up to 160lm/W, reliable and flexible for installation.

EVEREST



silux


LINEAR TRUNKING SYSTEM

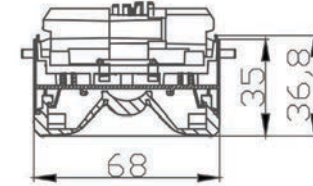


SL990A

Series	MODEL CODE	Function	POWER(W)	LUMEN(LM)	SIZE(MM)	BEAN ANGLE
Light Module	SL990-LM15409040WX5R	Standard	40	5800	1420*68mm	"30°/60°/ 90°/DA25°"
	SL990-LM15409040WX7V	0-10V Dimming	40	5800		
	SL990-LM15409040WX7D	DALI Dimming	40	5800		
	SL990-LM15409040WX5B	Standard+Max 12W Emergency+Battery	40	5800		
	SL990-LM15409040WX7E	Standard+Max 12W Emergency	40	5800		
	SL990-LM15509040WX5R	Standard	50	8000	1420*68mm	"30°/60°/ 90°/DA25°"
	SL990-LM15509040WX7V	0-10V Dimming	50	8000		
	SL990-LM15509040WX7D	DALI Dimming	50	8000		
	SL990-LM15509040WX5B	Standard+Max 12W Emergency+Battery	50	8000		
	SL990-LM15509040WX7E	Standard+Max 12W Emergency	50	8000	1420*68mm	"30°/60°/ 90°/DA25°"
	SL990-LM15709040WX5R	Standard	70	11000		
	SL990-LM15709040WX7V	0-10V Dimming	70	11000		
SL990-LM15709040WX7D	DALI Dimming	70	11000			
SL990-LM15709040WX5B	Standard+Max 12W Emergency+Battery	70	11000			
SL990-LM15709040WX7E	Standard+Max 12W Emergency	70	11000			


30°




60°



90°



DA25°

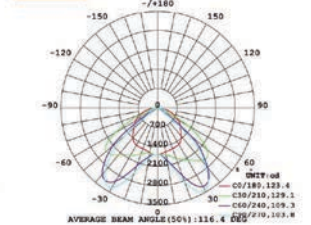



Accessories



SL990-LMLENS
 Lens for option:
 Bean angle:30°60°90°DA 25°
 Material:PMMA



SL990-ECW
 End Cap for luminaire with PC cover
 For clipping on end of trunking rail and luminaire
 Color:white



SL990-LM15BCW
 For mounting to trunking rail, used to close the spaces in the trunking where no electrical units are mounted.
 Size:1420mm
 Color: White



SL990-LM15TRWX5R
 3 Phase Track Rail Module
 For track light module
 Size:1420mm



SL990-PCX5/SL990-PCX7
 5/7 wire Power feed-in connector
 For inserting input power line



SL990-ASS
 Mounting clipx1,screwx1




SL990-ASCO-3000
 Cord hanger Screw x1,
 Cord x1,
 Mounting clip x1



SL990-ASCH-3000
 Chain hanger: Hook x1,
 Chain x1,
 Mounting clip x1



SL990B

MODEL CODE	Function	POWER(W)	LUMEN(LM)	SIZE(MM)	BEAN ANGLE
SL990B-LM15804540WX5R	Standard	80	8000	1420*68mm	45°x70°
SL990B-LM15804540WX7V	0-10V Dimming	80	8000		
SL990B-LM15804540WX7D	DALI Dimming	80	8000		
SL990B-LM15804540WX5B	Standard+Max 12W Emergency+Battery	80	8000		
SL990B-LM1550040WX7E	Standard+Max 12W Emergency	80	8000		




SL990C

MODEL CODE	Function	POWER(W)	LUMEN(LM)	SIZE(MM)	BEAN ANGLE
SL990C-LM15500040WX5R	Standard	50	6500	1420*68mm	120°
SL990C-LM15500040WX7V	0-10V Dimming	50	6500		
SL990C-LM15500040WX7D	DALI Dimming	50	6500		
SL990C-LM15500040WX5B	Standard+Max 12W Emergency+Battery	50	6500		
SL990C-LM15500040WX7E	Standard+Max 12W Emergency	50	6500		

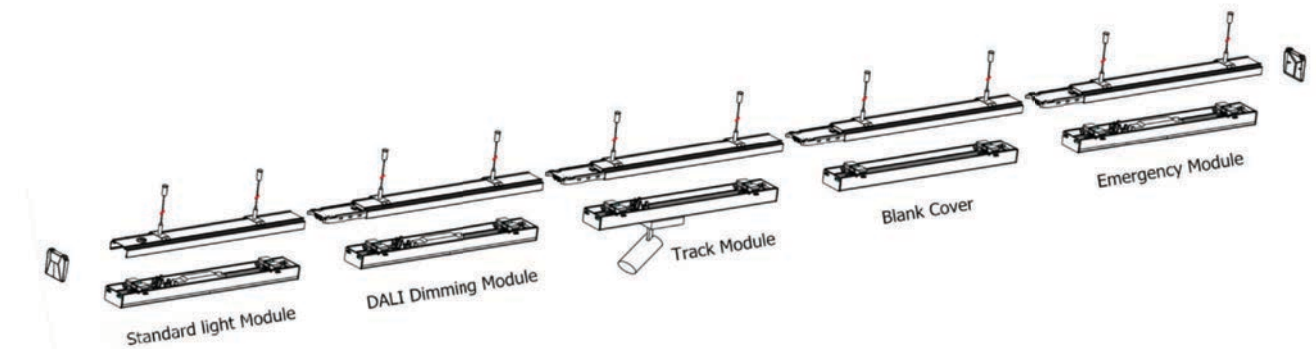

TRUNK RAIL



MODEL CODE	Function	WIRES	Function Description	SIZE(MM)
SL990-TR15WX5A	Normal 5 Wire TrunkRail	5	Standard Function+	1420*68mm
SL990-TR15WX5B	Power Input 5 WireTrunk Rail	5	DALI/0-10V/Emergency	1420*68mm
SL990-TR15WX7A	Normal 7 Wire TrunkRail	7	Standard Function+	1420*68mm
SL990-TR15WX7B	Power Input 7 WireTrunk Rail	7	DALI/0-10V/Emergency	1420*68mm



STL

Supermarket Shelves Linear Light system, Magnetic hiding installation, Fast and easy,
24V safe input. Match different wide shelves in supermarket.

STL



STLA

Product code	STLA0900	STLA1000	STLA1100	STLA1200
Power (W)	8W	9W	10W	11W
Lumen (Lm)	800	900	1000	1100
Size (mm)	820*16*16	920*16*16	1020*16*16	1120*16*16
Voltage	24V			
CRI	90			
Apply	900 / 1000 / 1100 / 1200 wide shelf			

STLB

Product code	STLB0900	STLB1000	STLB1100	STLB1200
Power (W)	8W	9W	10W	11W
Lumen (Lm)	800	900	1000	1100
Size (mm)	820*17*7	920*17*7	1020*17*7	1120*17*7
Voltage	24V			
CRI	90			
Apply	900 / 1000 / 1100 / 1200 wide shelf			




STLT


Product code	STLT1000	STLT2000
Size (mm)	1000	2000
Apply	With 30CM input 1.0mm² wire link with 24V output driver	

STLP

Product code	STLP
Size (mm)	750
Apply	With 75CM wire 0.5mm² with 3 magnetic block

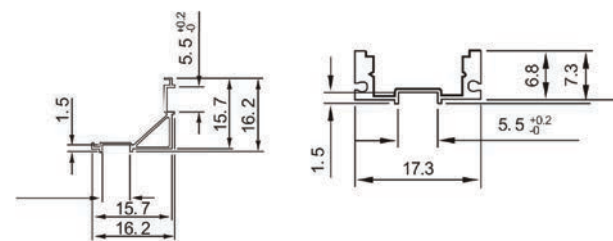

2700K 3000K 3500K 4000K 5000K






CAMARO

Multiple function Linear light system, up to 125lm/W
up & down light option, 3-phase track rail combination

SL-191

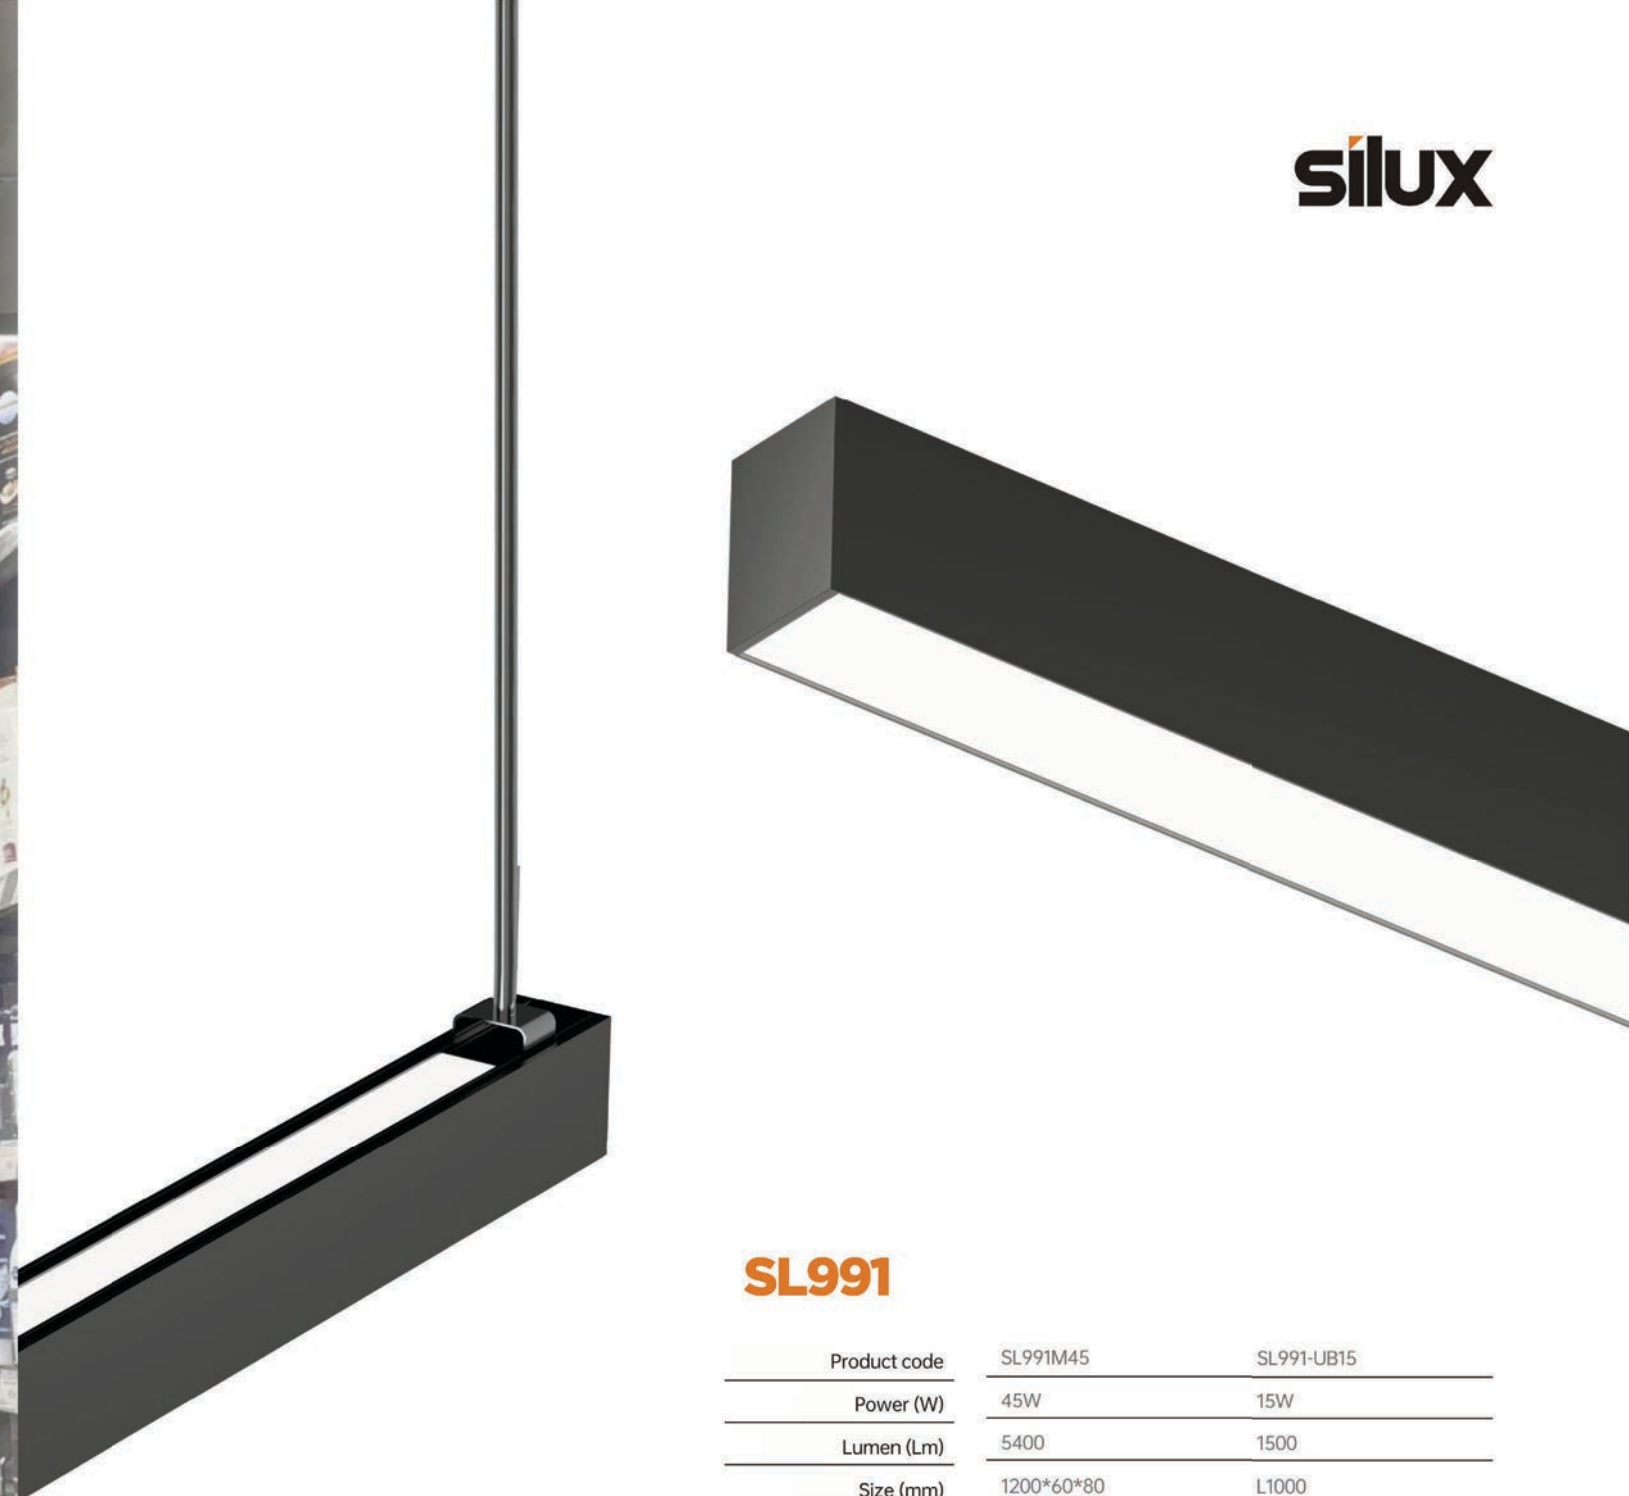

SL991



Product code	SL991M45	SL991-UB15
Power (W)	45W	15W
Lumen (Lm)	5400	1500
Size (mm)	1200*60*80	L1000
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners

LED

Driver

2700K 3000K 3500K 4000K 5000K





SL991



Product code	SL991UTrack
Power (W)	/
Lumen (Lm)	/
Size (mm)	L1000
Voltage	220-240V / 100-277V
PF	>0.9
CRI	83 / 90 / 95 / Thrive
Color	Black / White / Customized

Strategic partners

LED

Driver

2700K 3000K 3500K 4000K 5000K



SLDB

Product code	SLDB6215	SLDB7024	SLDB8035
Power (W)	15W	24W	35W
Lumen (Lm)	1250	2300	3400
Size (mm)	Ø62*140	Ø70*140	Ø80*158
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		






Mustang

Linkable Classical Linear light, one input can link to 20M
economic and high efficiency up to 125lm/W

SL-195

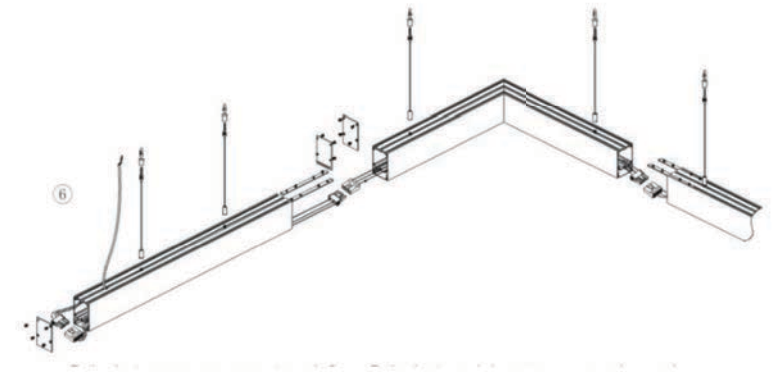

SL931



Product code	SI931040	SL931L040
Power (W)	40W	40W
Lumen (Lm)	4800	4800
Size (mm)	1200*50*75	L600*600*75
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners

LED

Driver

2700K 3000K 3500K 4000K 5000K





SL931



Product code	SL931G040	SL931GL040
Power (W)	40W	40W
Lumen (Lm)	4800	4800
Size (mm)	1215*62*28	L608*608*62*28
Cut-off (mm)	1201x51	L601x601*51
Voltage	220-240V / 100-277V	
PF	> 0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners

LED

Driver

2700K 3000K 3500K 4000K 5000K

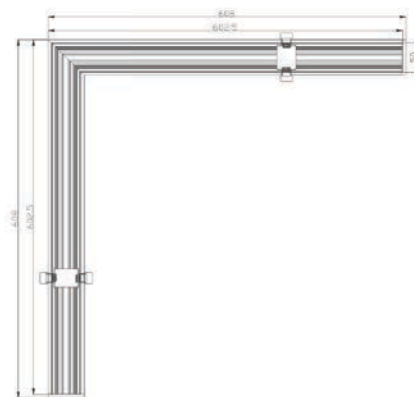



TEREX

Rotatable TerexLinear Light system, Multiple function, Modular design, Linkable, easy maintenance, track rail application option



1297



3 PHASE CHOSEN



2700K 3000K 3500K 4000K 5000K




SL992S

Product code	SL992S
Power (W)	60
Lumen (Lm)	7000
Size (mm)	L1297*W154*H60
Voltage	220-240V / 100-277V
PF	>0.9
CRI	83 / 90 / 95 / Thrive
Color	Black / White / Customized

Strategic partners




Light distribution curve

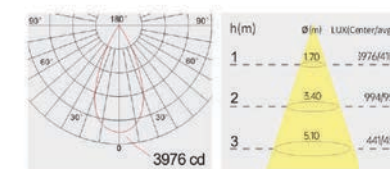

SL992S / 45° / 3000K

silux

CONNECTION MODE

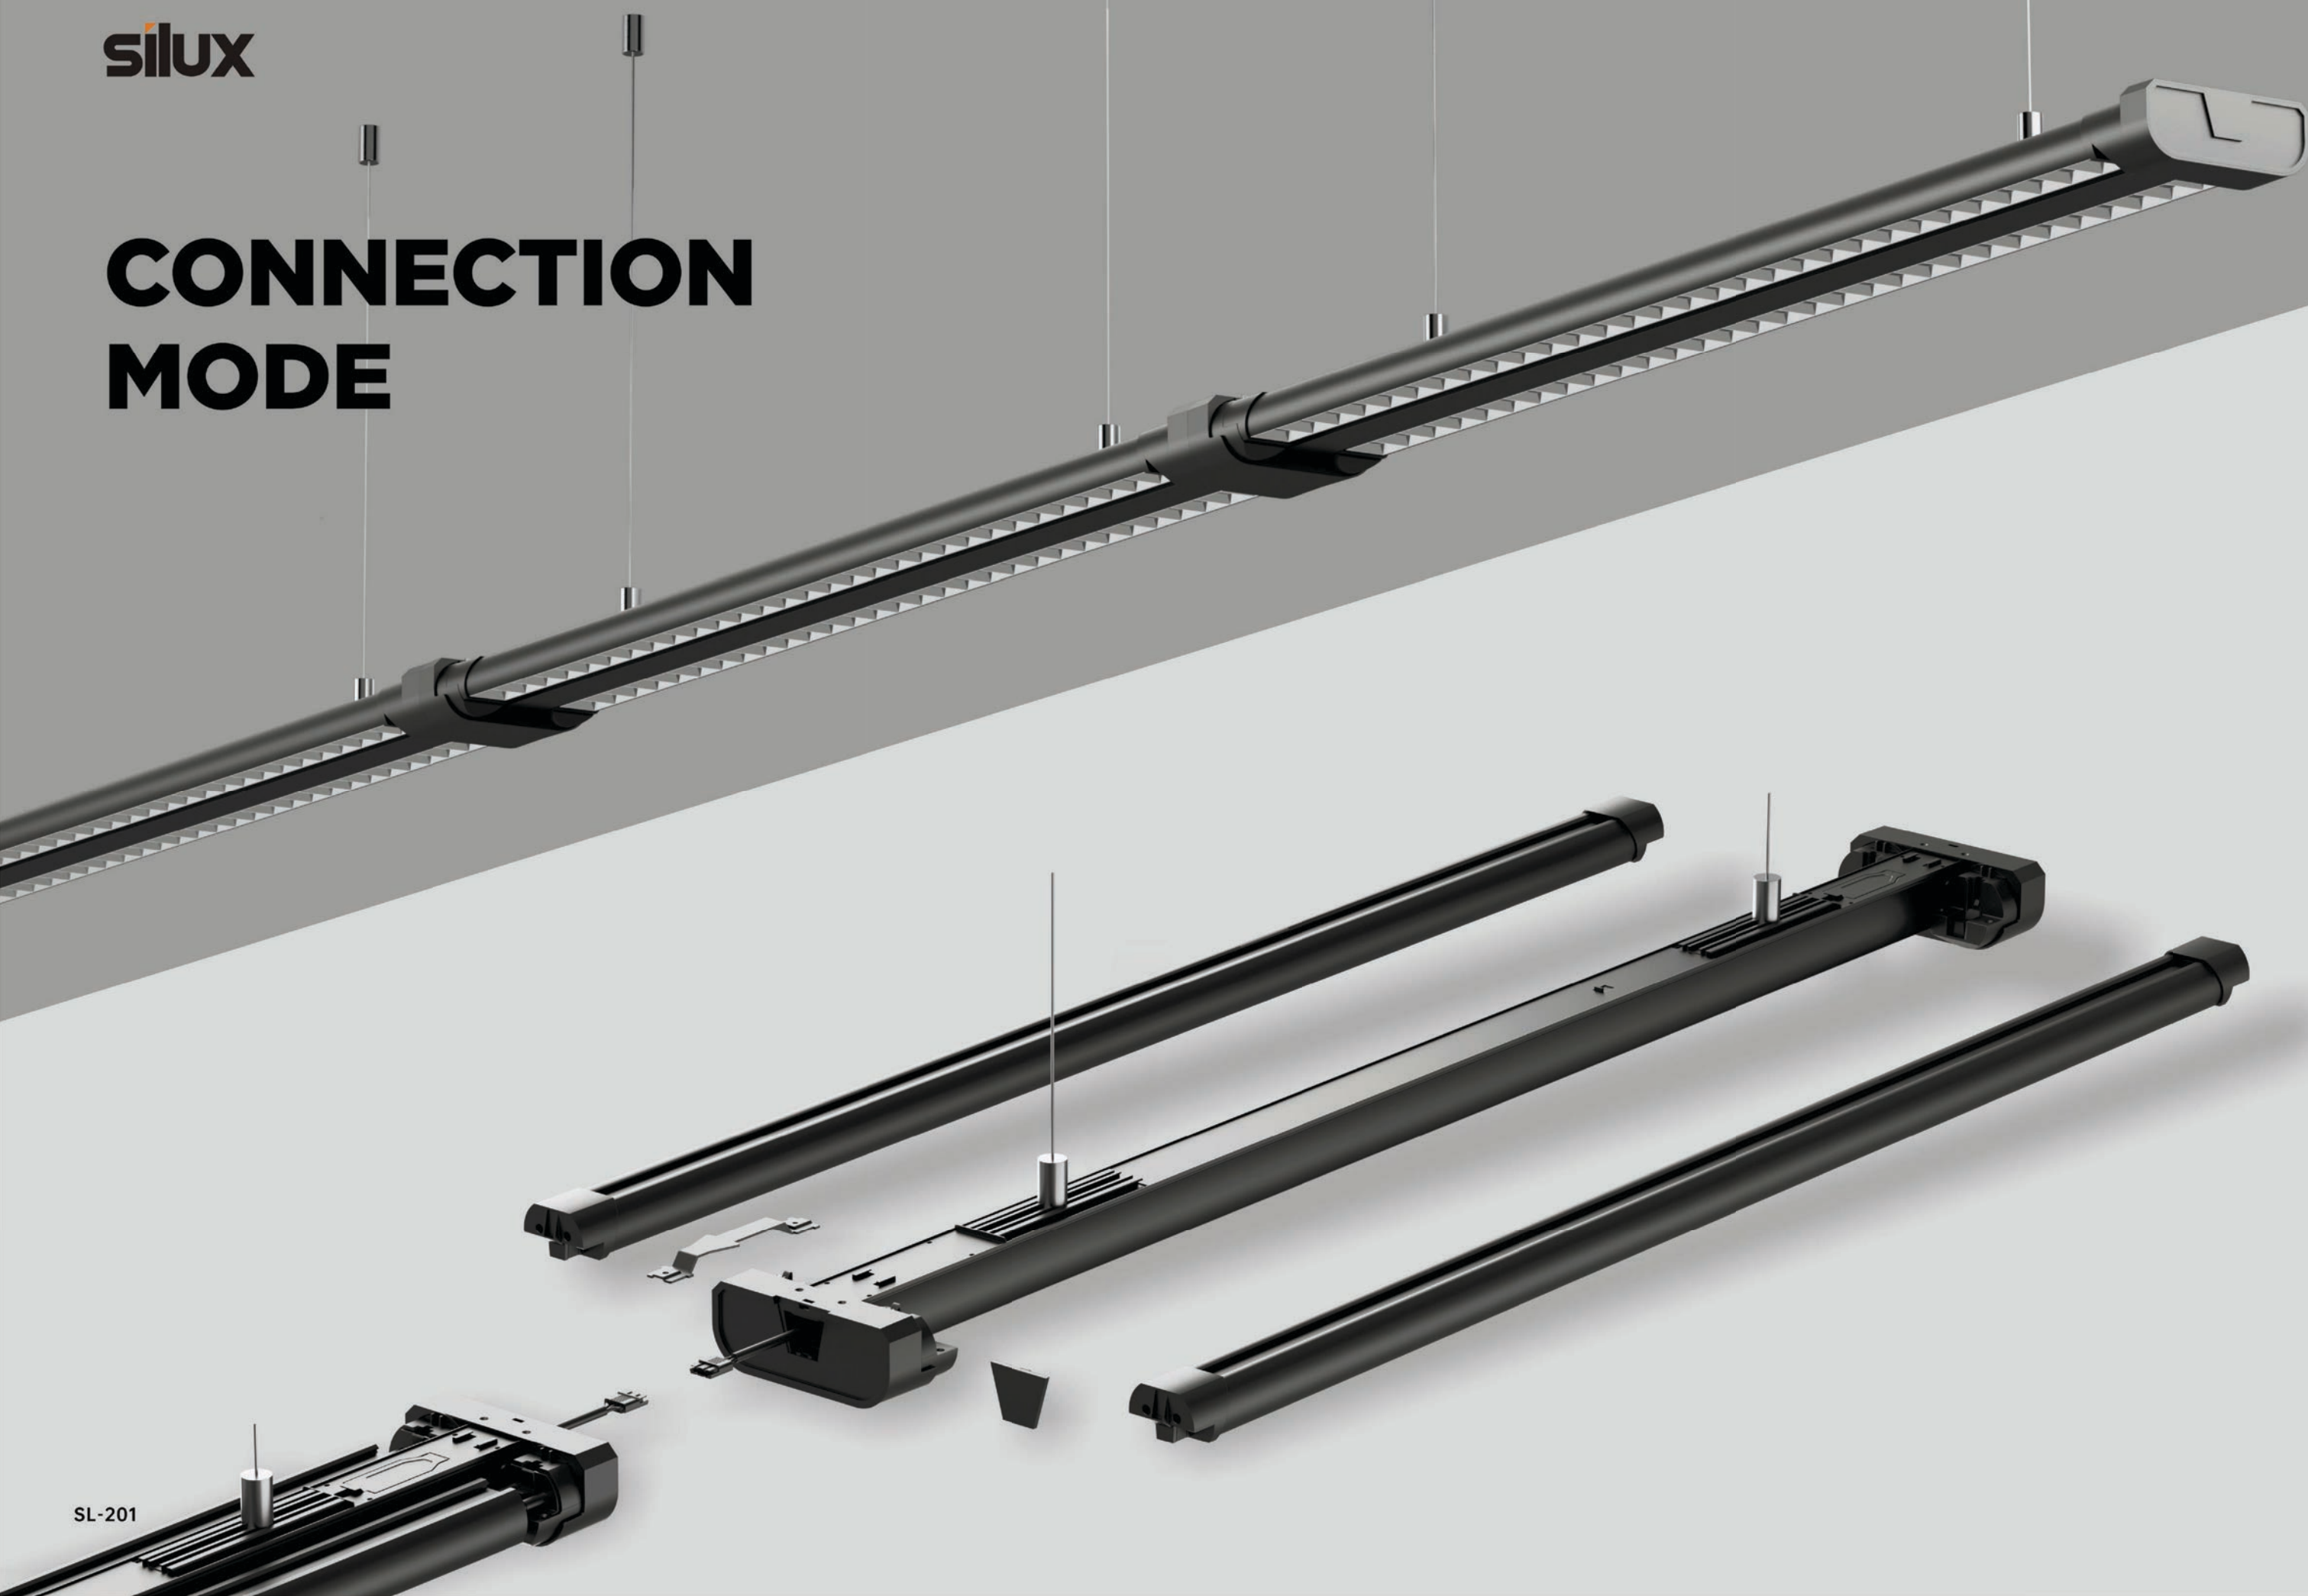

SL-201

SL-202






SL992A

Product code	SL992A-60W	SL992A-30W
Power (W)	60W	30W
Lumen (Lm)	7000	3500
Size (mm)	1150	580
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	


Strategic partners

LED
 Driver

Light distribution curve

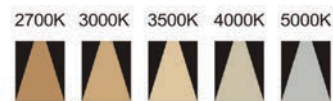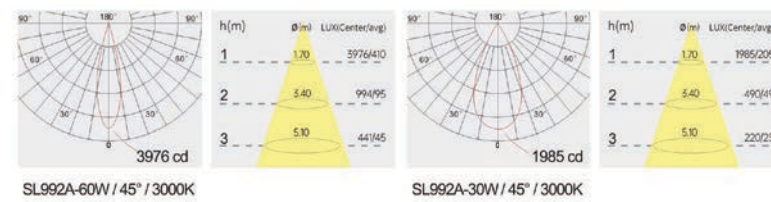

Product close-up






SL992B

Product code	SL992B-30W	SL992B-15W
Power (W)	30	15
Lumen (Lm)	3500	1700
Size (mm)	1150	580
Voltage	220-240V / 100-277V	
PF	>0.9	
CRI	83 / 90 / 95 / Thrive	
Color	Black / White / Customized	

Strategic partners

LED
 Driver

Light distribution curve

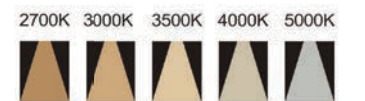
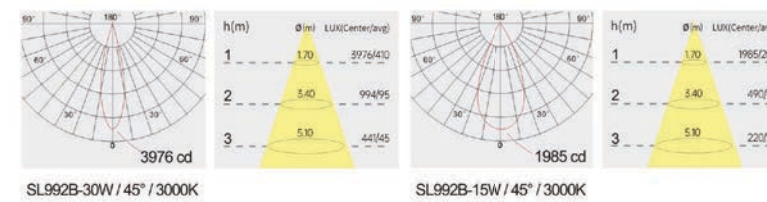


Product close-up



HUMMER



918 Classical Linear Light, High quality
High efficiency, Decorous and reliable

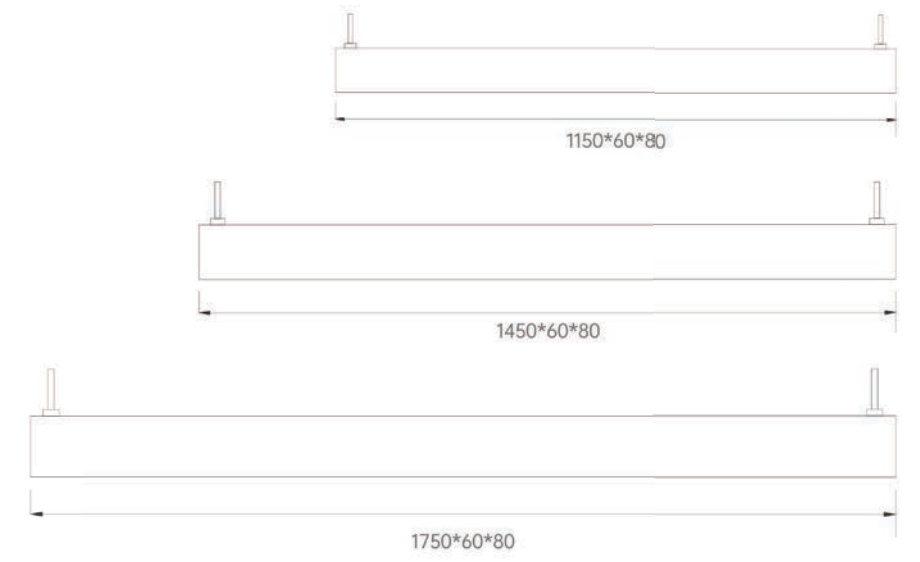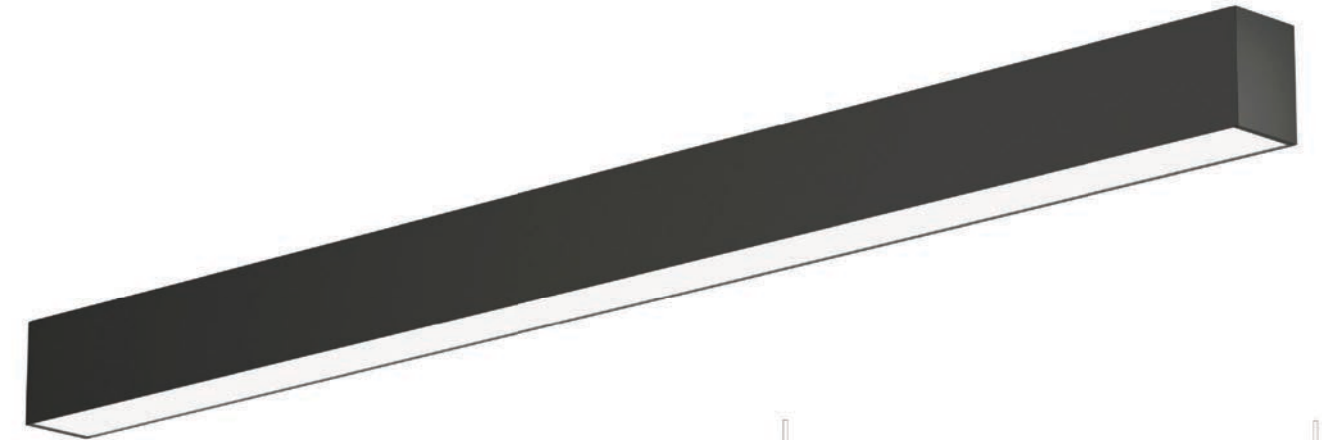

SL918

Product code	SL91840	SL91860	SL91880
Power (W)	40W	60W	80W
Lumen (Lm)	4000	6000	8000
Size (mm)	1150*60*80	1450*60*80	1750*60*80
Voltage	220-240V / 100-277V		
PF	>0.9		
CRI	83 / 90 / 95 / Thrive		
Color	Black / White / Customized		

Strategic partners

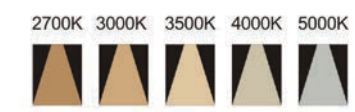

silux

Reiz

Reiz grille linear light
suspension and recessed option
flexible combination

SL9260



SL9261



SL9262



SL92636S




SL926

Strategic partners




LED


Driver

Light distribution curve

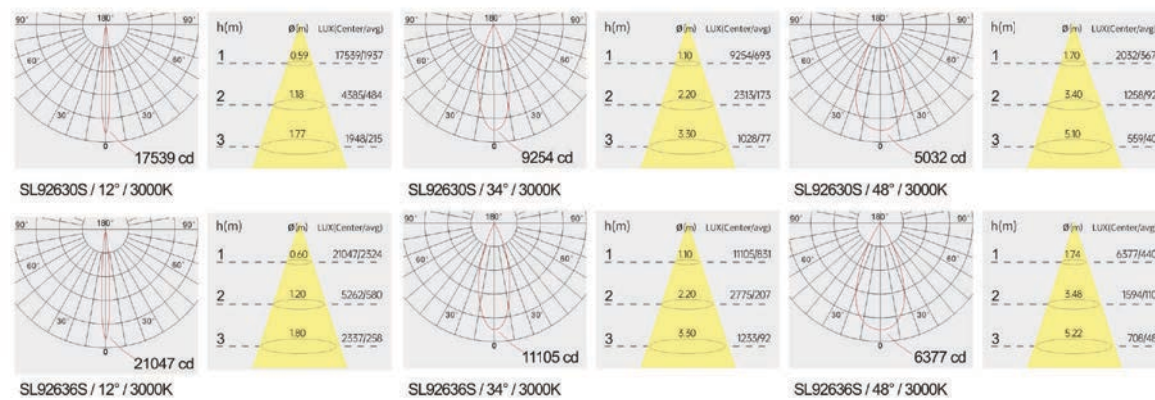

Product code	SL92630S	SL92636S	SL9260	SL9261	SL9262
Power (W)	30W	36W	44W	40W	40W
Lumen (Lm)	3000	3600	3200	4000	4000
Size (mm)	1200*38*64	1500*38*64	1500*38*64	1150*38*64	1150*38*64
Voltage	220-240V / 100-277V				
PF	>0.9				
CRI	83 / 90 / 95 / Thrive				
Color	Black / White / Customized				

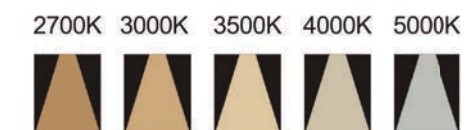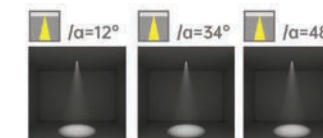

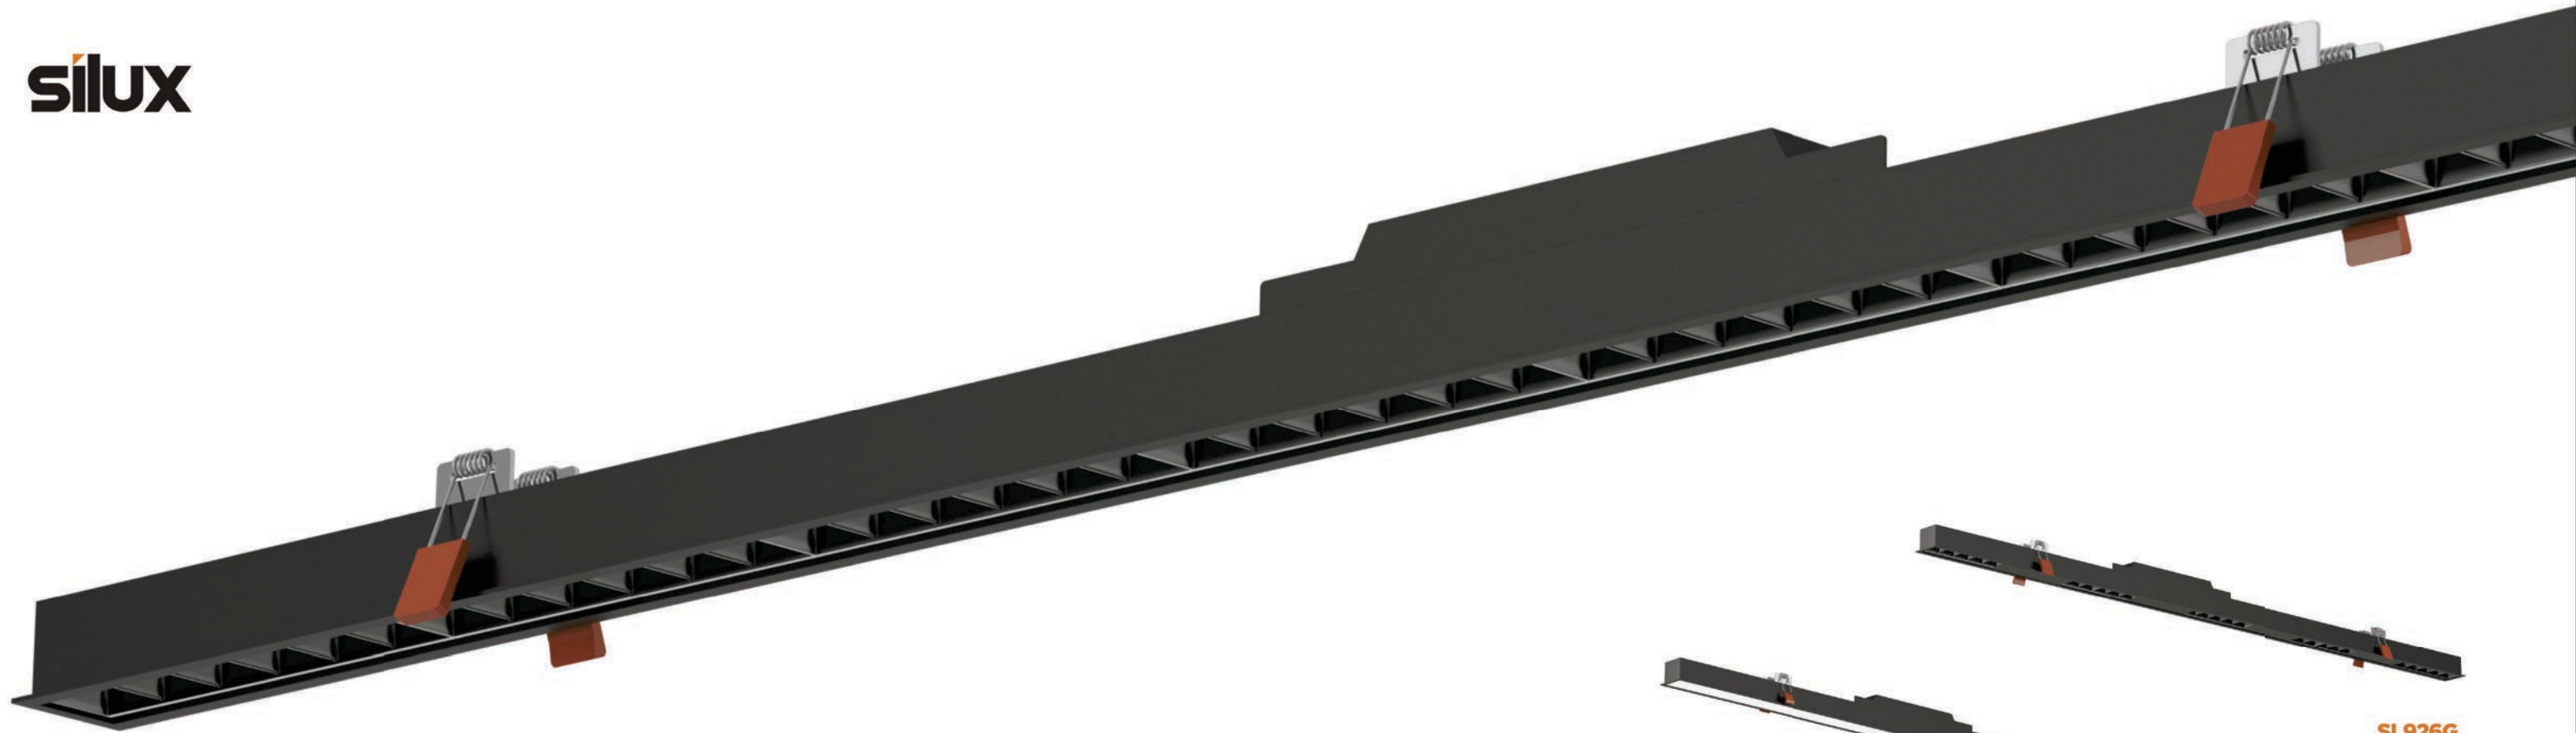

SL926G1



SL926G

SL926G2


SL926G0

SL926G



Strategic partners



Light distribution curve

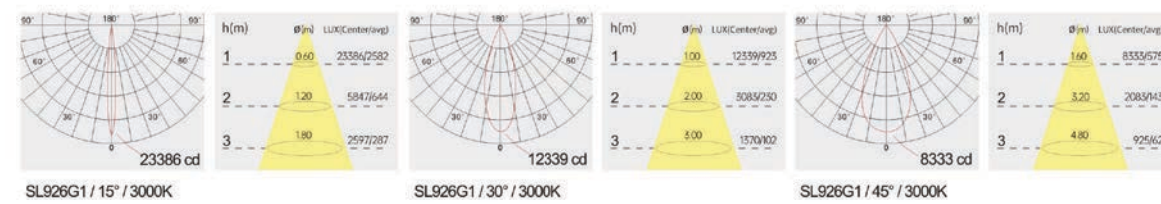


Product code	SL926G	SL926G0	SL926G1	SL926G2
Power (W)	30W	40W	40W	40W
Lumen (Lm)	3000	4000	4000	4000
Size (mm)	1208*46*34	1208*46*34	1208*46*34	1208*46*34
Cut-off (mm)	1194x34	1194*34	1194*34	1194*34
Voltage	220-240V / 100-277V			
PF	>0.9			
CRI	83 / 90 / 95 / Thrive			
Color	Black / White / Customized			

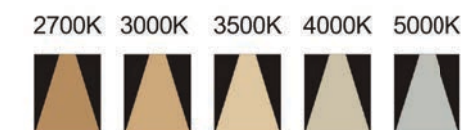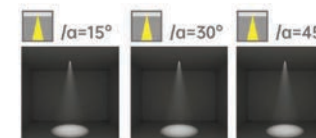


silux

Prado



Prado grille linear light
suspension and recessed option
flexible combination



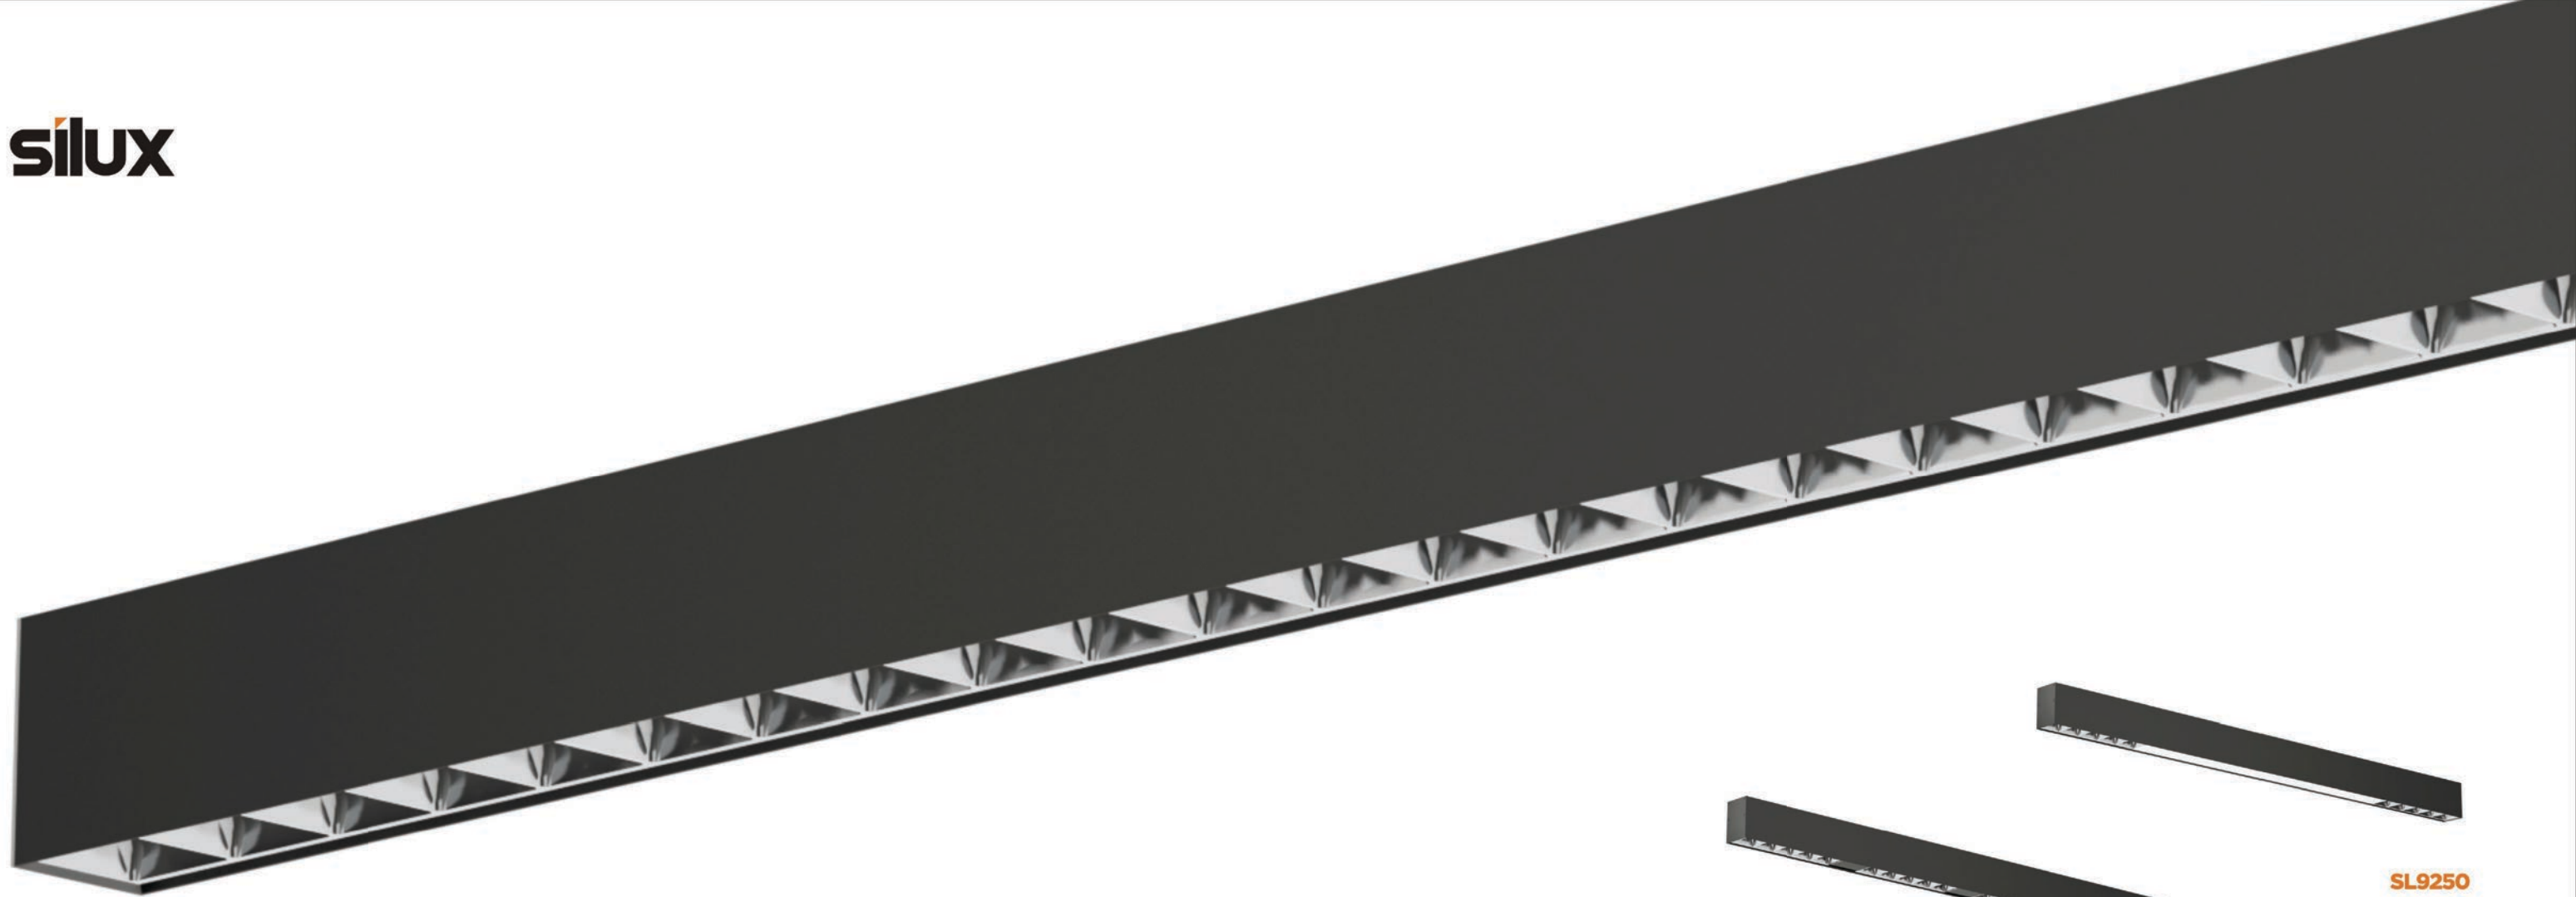

SL9251



SL9250

SL925


SL9252

SL925



Strategic partners



Light distribution curve

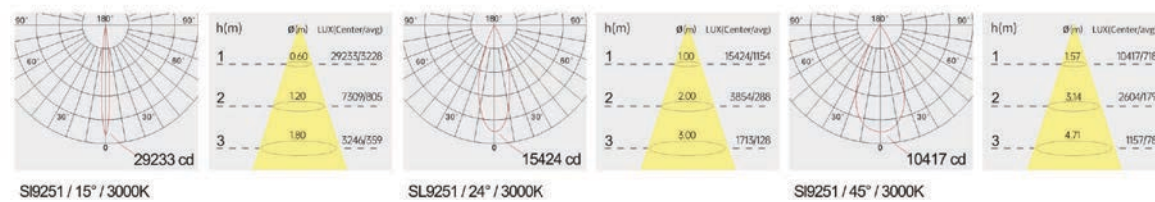

Product code	SL925	SL9250	SL9251	SL9252
Power (W)	40W	50W	50W	50W
Lumen (Lm)	4000	5000	5000	5000
Size (mm)	1185*55*80	1185*55*80	1185*55*80	1185*55*80
Voltage	220-240V / 100-277V			
PF	>0.9			
CRI	83 / 90 / 95 / Thrive			
Color	Black / White / Customized			

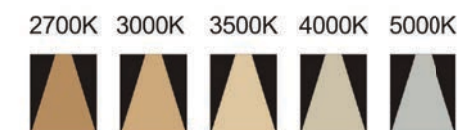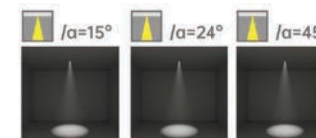



SL925G1




SL925G



Strategic partners



Light distribution curve

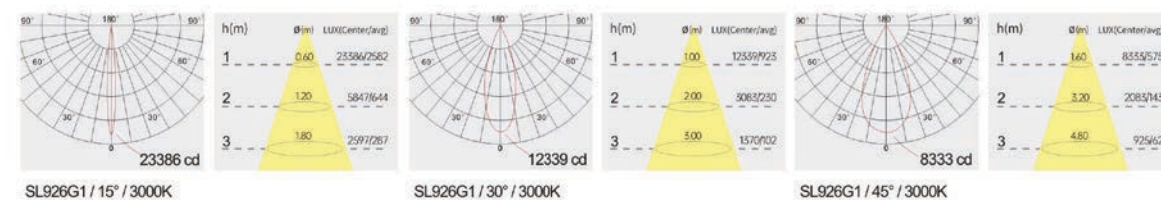


Product code	SL925G	SL925G0	SL925G1	SL925G2
Power (W)	40W	50W	50W	50W
Lumen (Lm)	4000	4000	5000	5000
Size (mm)	1192*67*45	1192*67*45	1192*67*45	1192*67*45
Cut-off (mm)	1181*55	1181*55	1181*55	1181*55
Voltage	220-240V / 100-277V			
PF	>0.9			
CRI	83 / 90 / 95 / Thrive			
Color	Black / White / Customized			

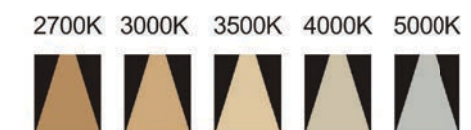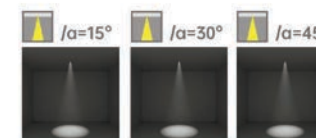



Rio

Slim Rio Suspension linear light, up & down light, exquisite & brief design

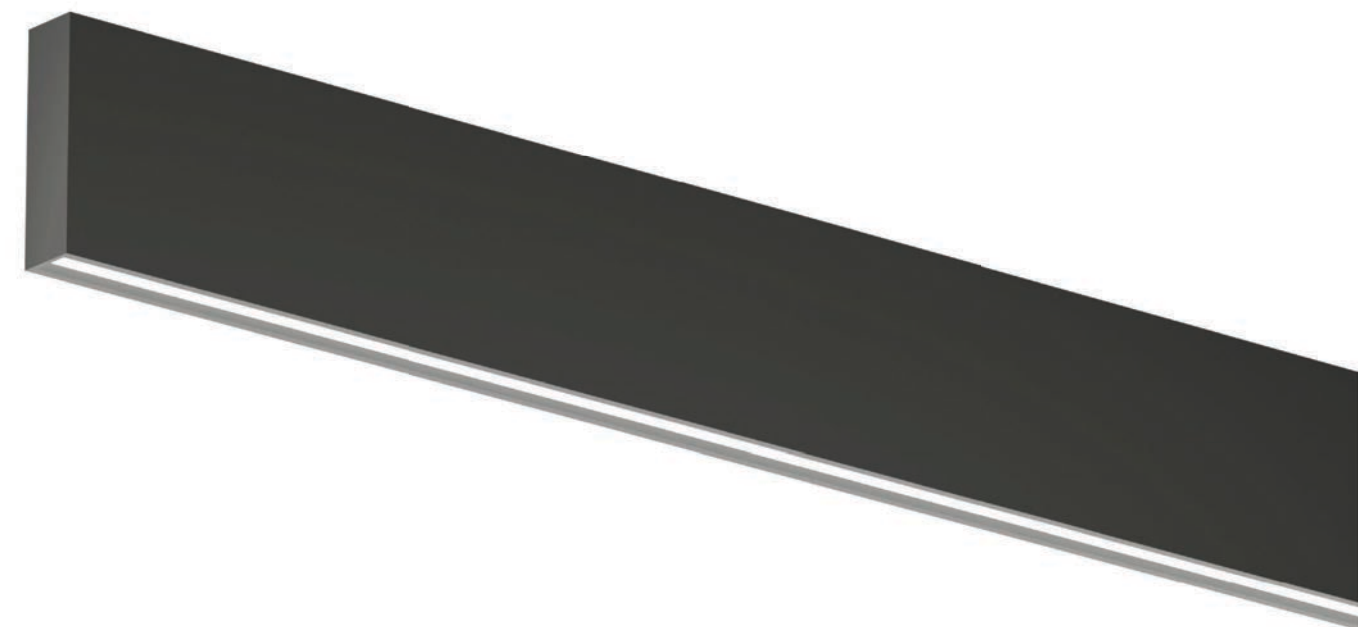


SL27100

Product code	SL27100
Power (W)	30+15W
Lumen (Lm)	2700+1000
Size (mm)	1200*27*100
Voltage	220-240V / 100-277V
PF	>0.9
CRI	83 / 90 / 95 / Thrive
Color	Black / White / Customized

Strategic partners

LED
 Driver

2700K 3000K 3500K 4000K 5000K

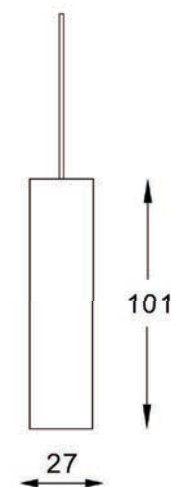



SSM Rail+Accessories

P223-226



SMR rail



SMR accessory



SMR Driver

SMA

P227-228



SMA-1



SMA-2

SMB

P229-230



SMB-1



SMB-2

SMAS

P231-232



SMAS-1



SMAS-2

SMC

P233



SMD



P234



SME



P235-236



SMF/SMG



SMHT/SMHR


P237-238




silux

Super Slim Magnetic system

Super Slim Magnetic Lighting system, New fashion, New trend, New Era

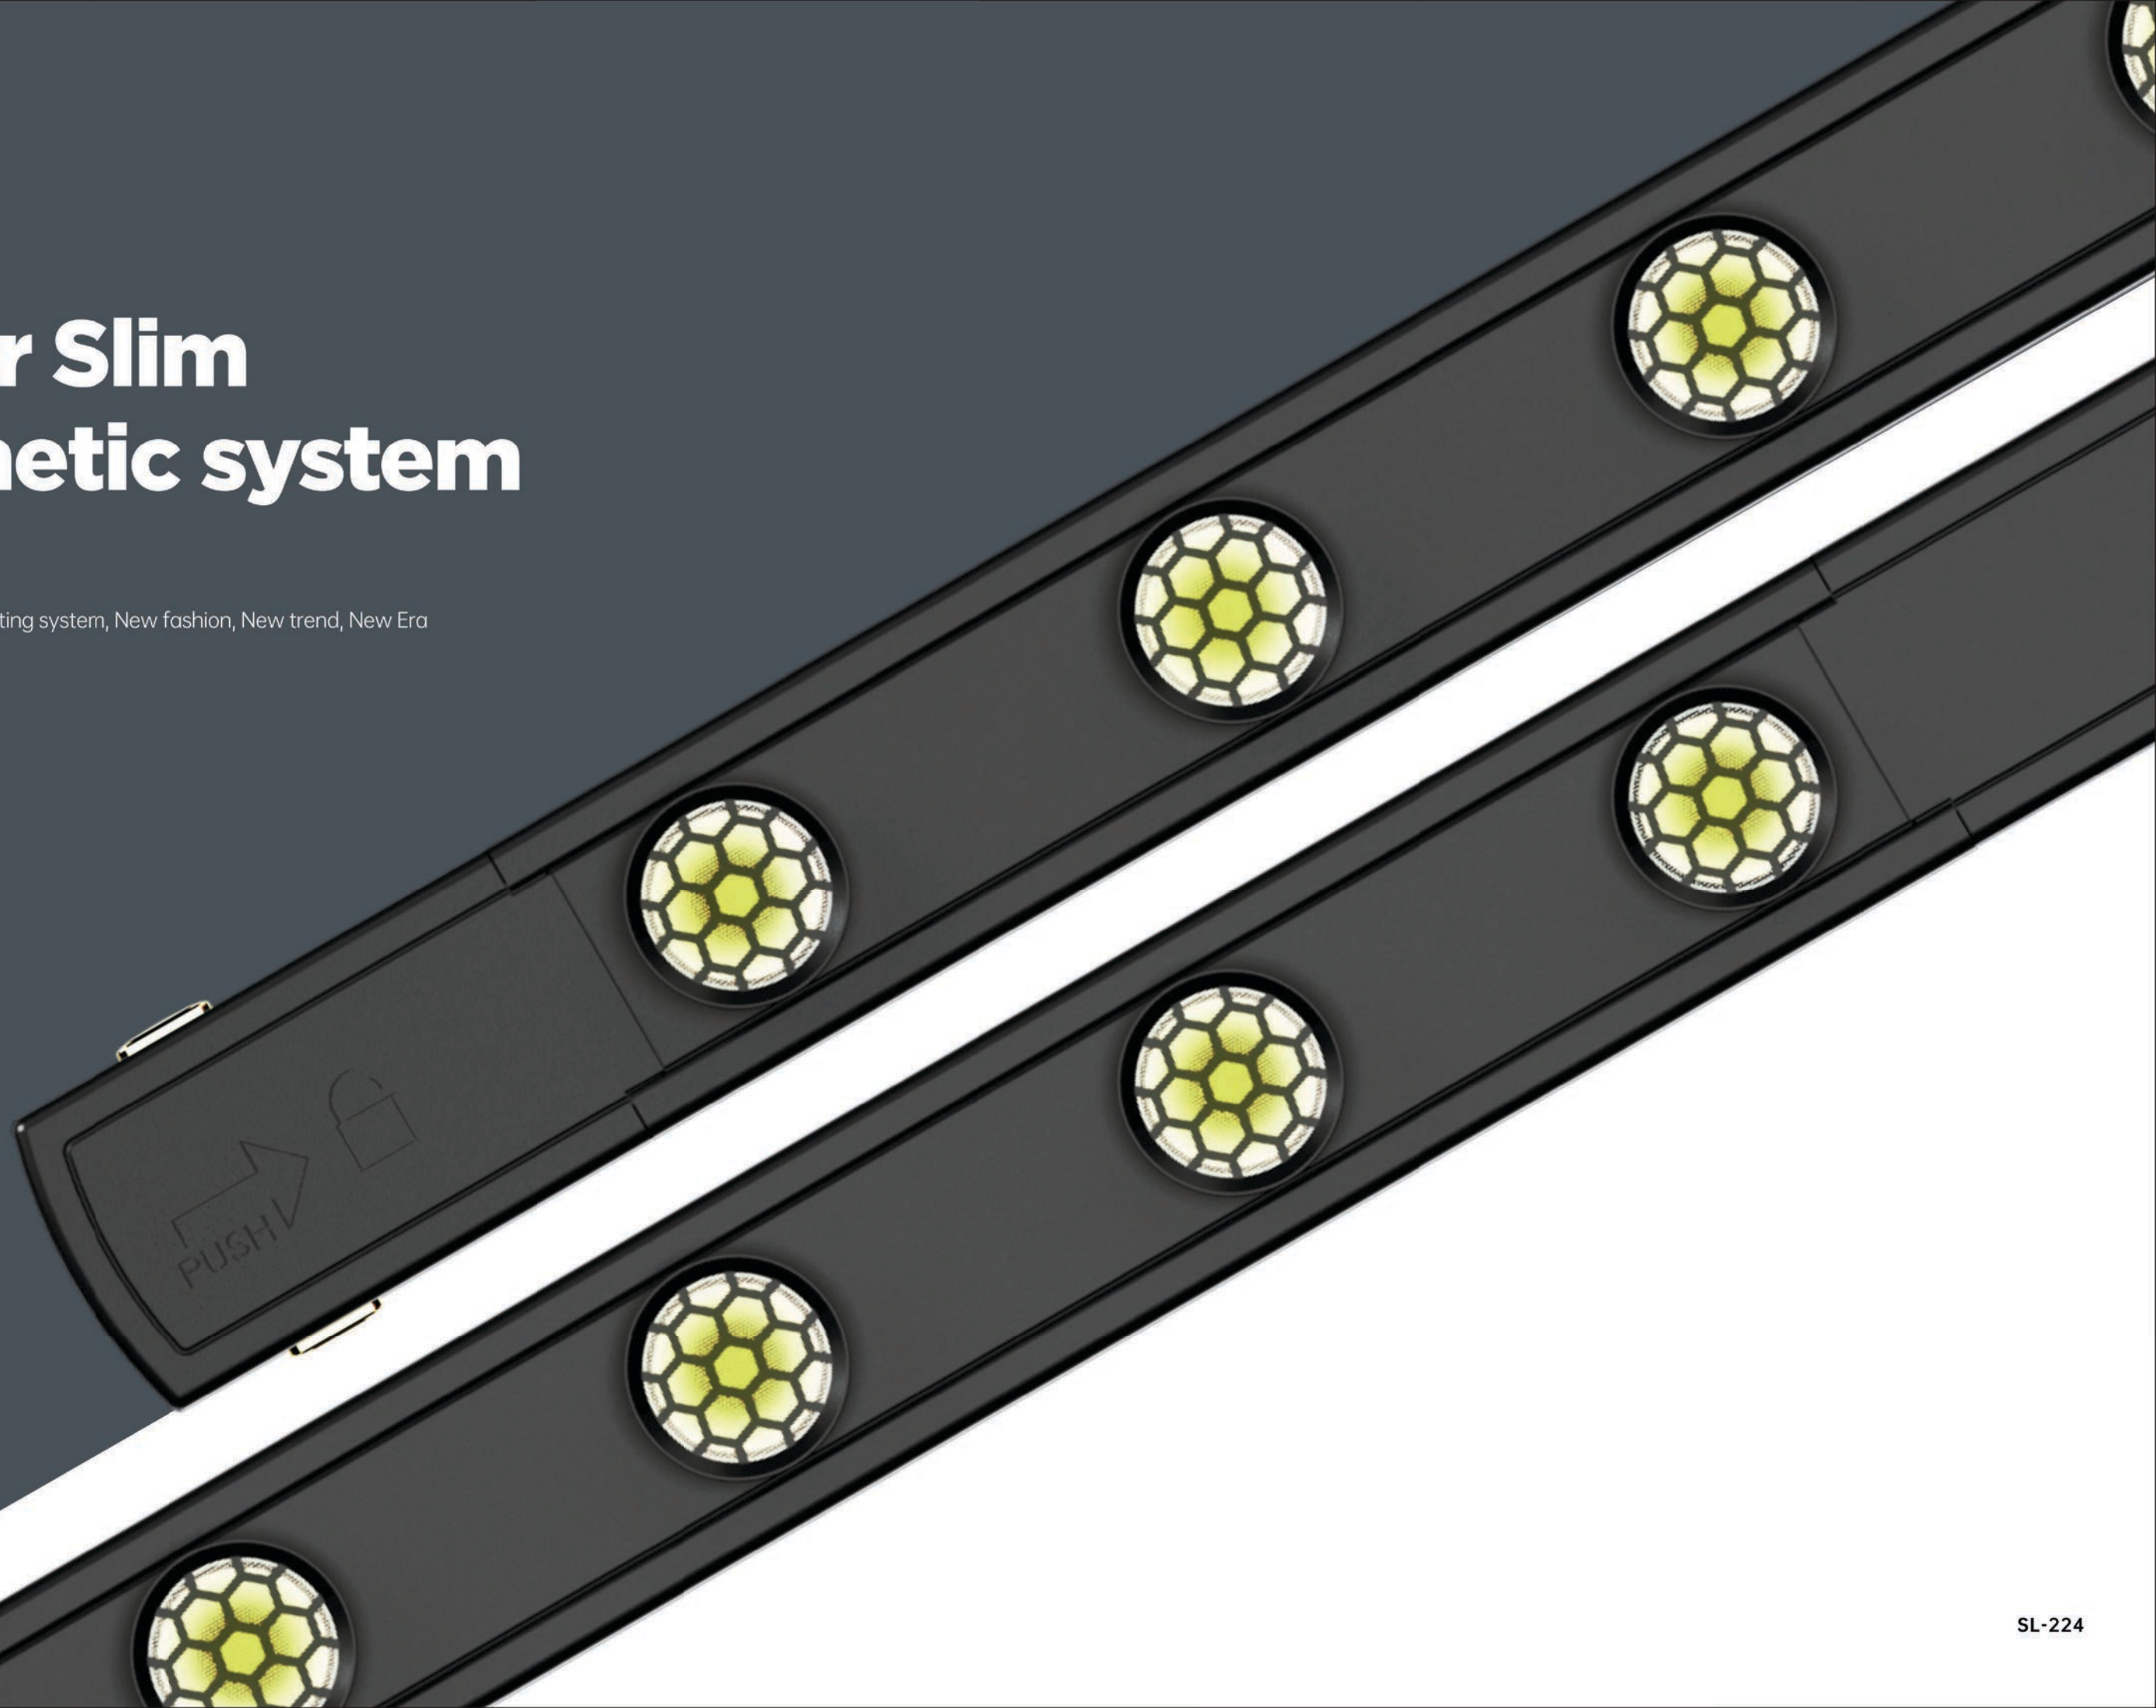

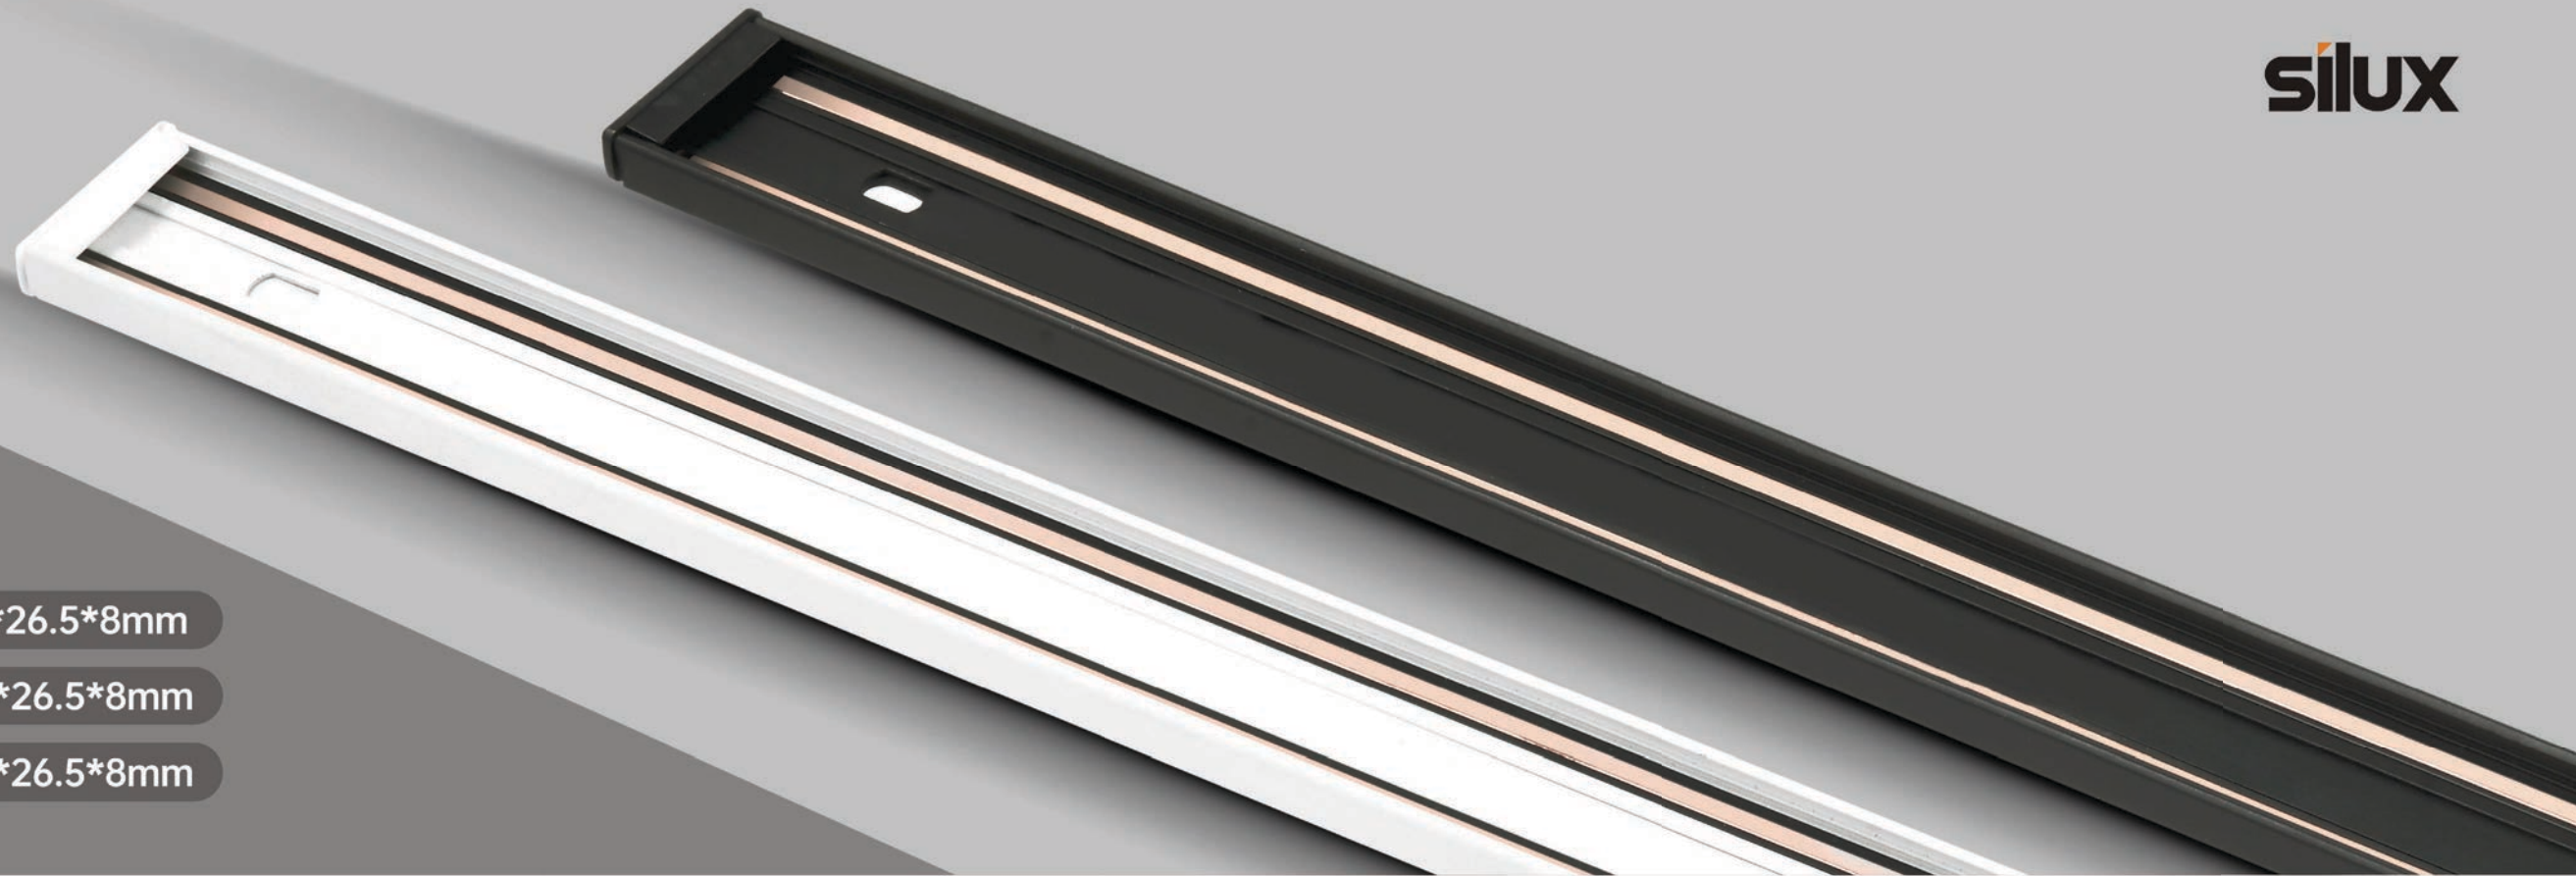

- SMR1000-B(W) 1000*26.5*8mm
- SMR2000-B(W) 2000*26.5*8mm
- SMR3000-B(W) 3000*26.5*8mm

SSM rail+ Accessories

SMD100-B(W)
320*26*30mm

SMD200-B(W)
400*26*30mm



SMR-MC-B(W)
40*24*4mm



SMR-LC-B(W)
26.5*26.5*4mm



SMR-IP-B(W)
39*24*4mm



SMR-CC-B(W)
47.3*47.3*4mm



SMR-TC-B(W)
68*47.5*4mm



SMR-XC-B(W)
68.5*68.5*4mm





SMA-1

SMA-2

Product code	SMA06-B(W)-1	SMA12-B(W)-1
Power (W)	6W	12W
Lumen (Lm)	420	840
Size (mm)	L300*W22*H11	L530*W22*H11
Voltage	48Vdc	
CRI	90	
Color	Black / White / Customized	

Product code	SMA06-B(W)-2	SMA12-B (W)-2
Power (W)	6W	12W
Lumen (Lm)	420	840
Size (mm)	L280*W30*H13	L505*W30*H13
Voltage	48Vdc	
CRI	90	
Color	Black / White / Customized	

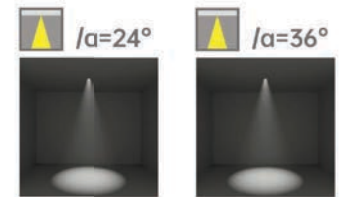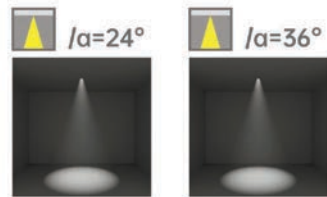

2700K 3000K 3500K 4000K 5000K




2700K 3000K 3500K 4000K 5000K



Product close-up



Product close-up




Strategic partners




Strategic partners




Light distribution curve

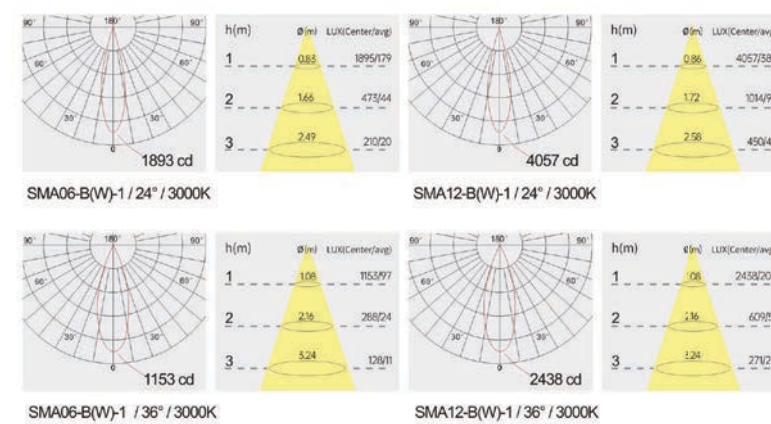

Light distribution curve

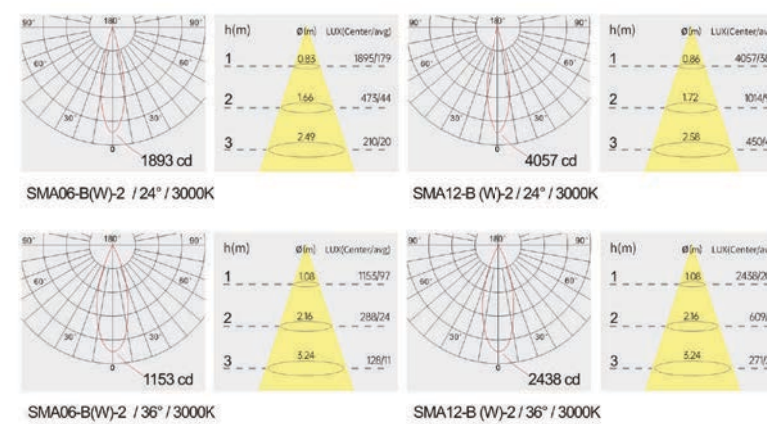

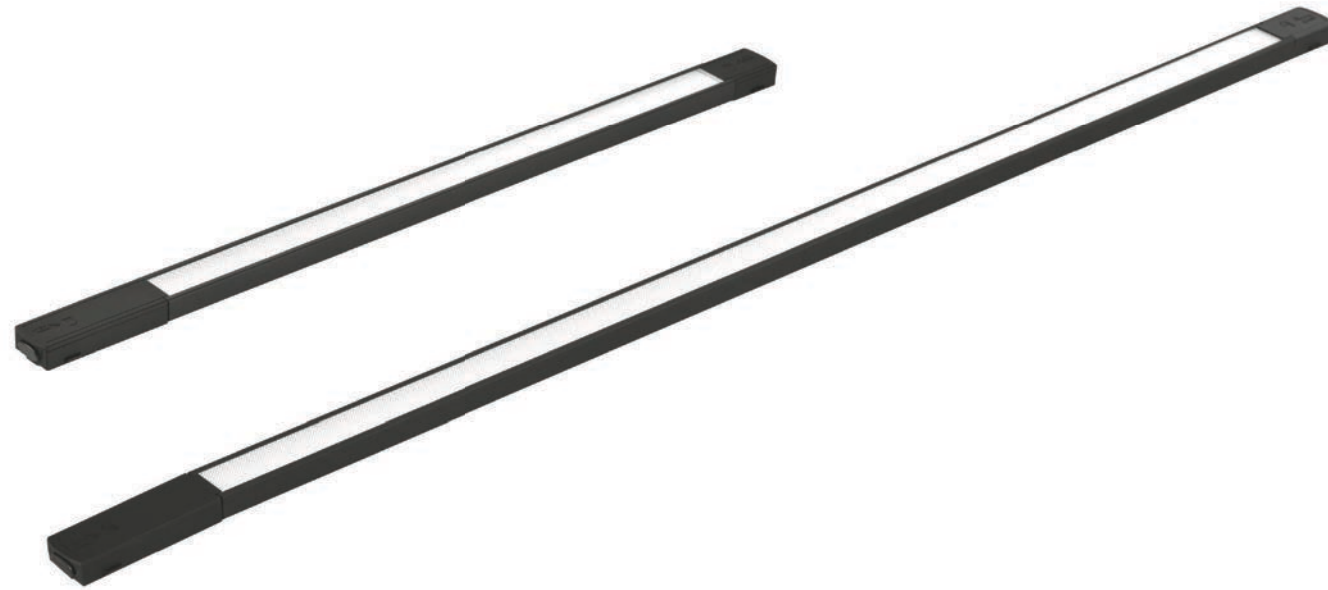




SMB-1

Product code	SMB06-B(W)-1	SMB12-B(W)-1
Power (W)	10W	20W
Lumen (Lm)	800	1600
Size (mm)	L400*W22*H11	L653*W22*H11
Voltage	48Vdc	
CRI	90	
Color	Black / White / Customized	

Strategic partners

LED
 Driver

Product close-up

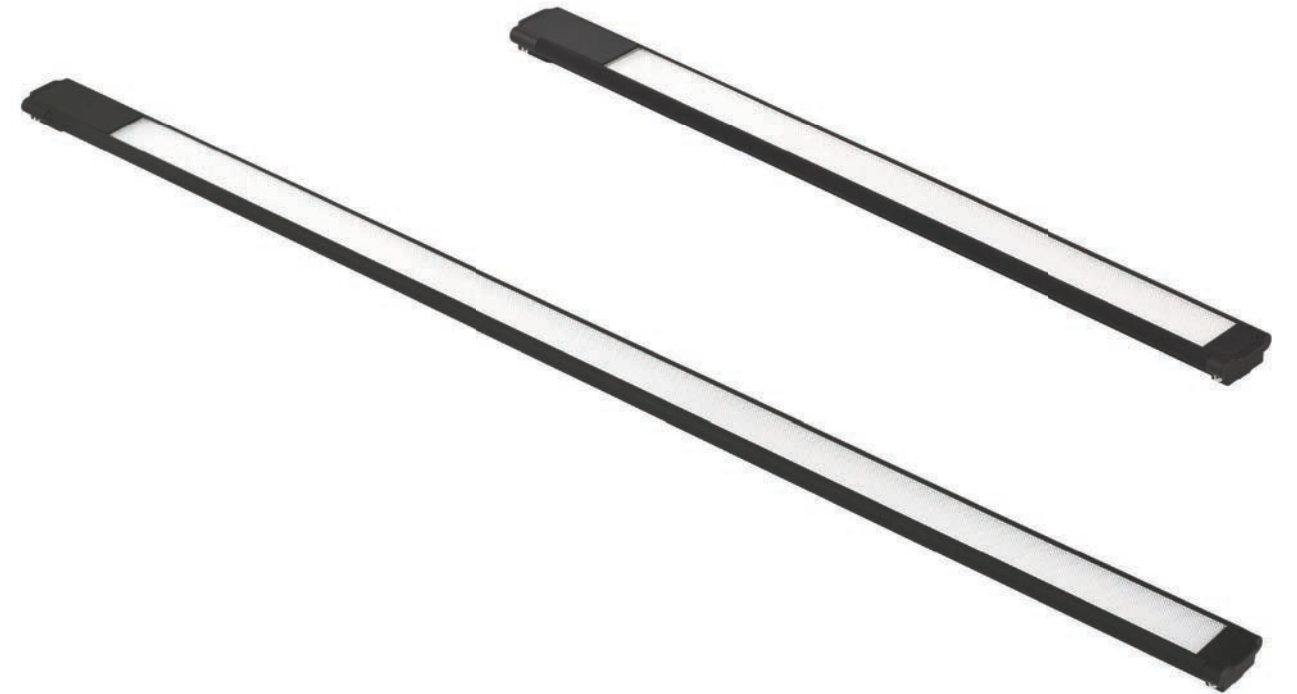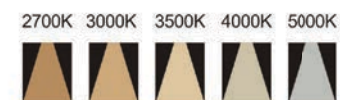



SMB-2

Product code	SMB06-B(W)-2	SMB12-B(W)-2
Power (W)	10W	20W
Lumen (Lm)	800	1600
Size (mm)	L373*W30*H13	L628*W30*H13
Voltage	48Vdc	
CRI	90	
Color	Black / White / Customized	

Strategic partners

LED
 Driver

Product close-up

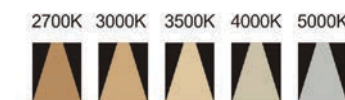






SMAS-1

Product code	SMAS06-B(W)-1	SMAS12-B(W)-1
Power (W)	6W	12W
Lumen (Lm)	420	840
Size (mm)	L132*W21*H57	L244*W21*H57
Voltage	48Vdc	
CRI	90	
Color	Black / White / Customized	

Strategic partners



Light distribution curve

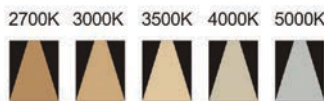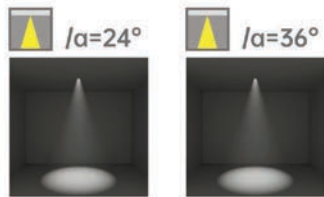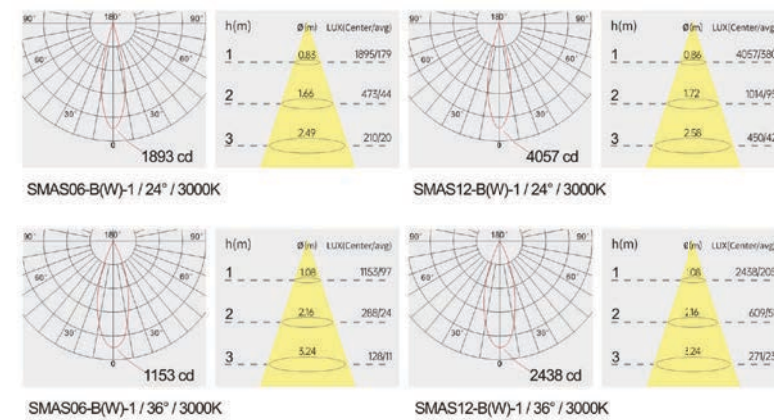




SMAS-2

Product code	SMAS06-B(W)-2	SMAS12-B(W)-2
Power (W)	6W	12W
Lumen (Lm)	420	840
Size (mm)	L122*W27*H35	L230*W27*H35
Voltage	48Vdc	
CRI	90	
Color	Black / White / Customized	

Strategic partners



Light distribution curve

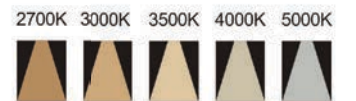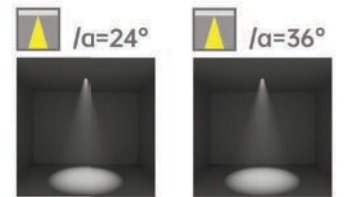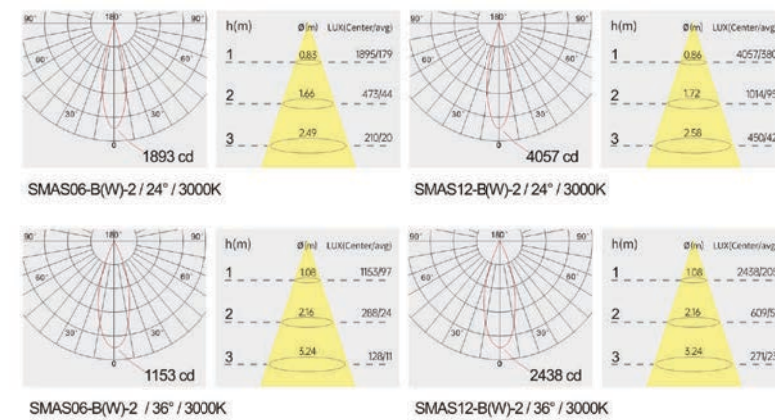







SMC

Product code	SMC06-B(W)-1	SMC12-B(W)-1	SMCZ07-B(W)-1
Power (W)	6W	12W	7W
Lumen (Lm)	480	960	500
Size (mm)	L115*35*36	L115*47*118	L115*40*100
Voltage	48Vdc		
CRI	90		
Color	Black / White / Customized		


Strategic partners



Light distribution curve

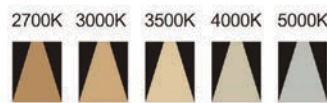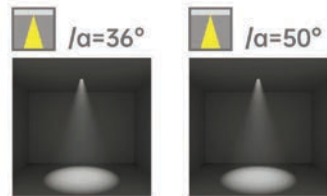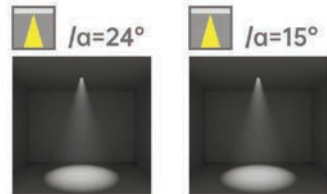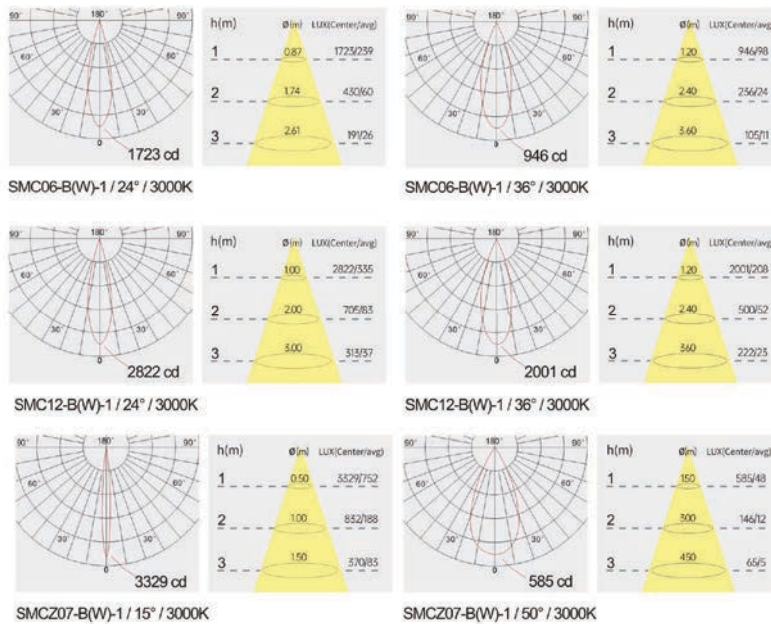

Product close-up





Strategic partners

SMD

Product code	SMD07-B(W)-1	SMD306-B(W)-1
Power (W)	7W	6W*3
Lumen (Lm)	560	480*3
Size (mm)	L155*55	L230*33
Voltage	48Vdc	
CRI	90	
Color	Black / White / Customized	

Light distribution curve



Product close-up






SME

Product code	SMEA07-B(W)-1	SMEB07-B(W)-1
Power (W)	7W	7W
Lumen (Lm)	560	560
Size (mm)	L155*60*290	L115*35*200
Voltage	48Vdc	
CRI	90	
Color	Black / White / Customized	


Strategic partners



Light distribution curve

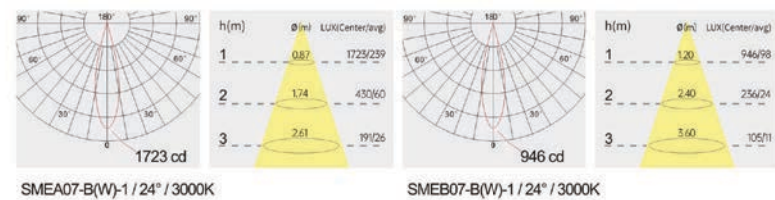



Product close-up



SME

Product code	SMEC05-B(W)-1	SMED10-B(W)-1
Power (W)	5W	10W
Lumen (Lm)	400	800
Size (mm)	L115*65*50	L115*120
Voltage	48Vdc	
CRI	90	
Color	Black / White / Customized	

Strategic partners

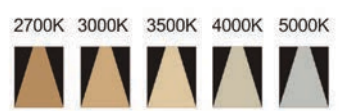

Product close-up







SMF / SMG

Product code	SMF10-B(W)	SMG08-B(W)
Power (W)	10W	8W
Lumen (Lm)	800	640
Size (mm)	L300	200
Voltage	48Vdc	
CRI	90	
Color	Black / Gold / Customized	

Strategic partners



Product close-up



2700K 3000K 3500K 4000K 5000K





SMHT / SMHR

Product code	SMHT05-B(W)	SMHR05-B(W)
Power (W)	5W	5W
Lumen (Lm)	300	300
Size (mm)	180	150
Voltage	48Vdc	
CRI	90	
Color	Black / White / Customized	

Strategic partners



2700K 3000K 3500K 4000K 5000K



Product close-up

