

TRACK LIGHTS

SPECIFICATIONS

- Multi-light system, thus providing greater lighting range and flexibility.
- Adjustable direction to provide focal lighting, able to concentrate light on areas that need to be emphasized
- Energy-saving LED light source, high light efficiency and low energy consumption
- Universal track, modular design, easy to install, suitable for a variety of scenarios



Illumination of commercial spaces

TRACK LIGHTS



TRL015



TRL001



TRL003



TRL004



TRL010



TRL016



TRL008



TRL009



TRA001



TRL002



TRL005



TRL006



TRL007



KOSOON®

Track lights are suitable for various scenarios, including home lighting, commercial lighting, exhibition halls, galleries, etc., providing more flexible and customized lighting solutions.

The orange markings are clickable

BACK ↻



TRL015






TRL001

The orange markings are clickable

BACK

- IP 20
- PF 0.9
- UGR ≤19

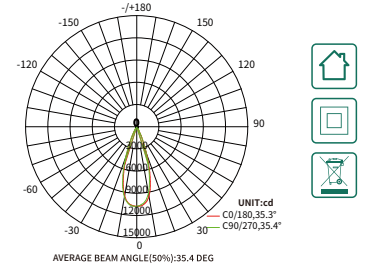


TRL015

Lumen	2700lm/4000lm
Power	20W/30W
CCT	3000K/4000K
CRI	≥80
Angle	36°
UGR	≤19
Dimensions	Ø76*L115mm/Ø90*L125mm
Color	White/Black
Input Voltage	220V-240V
IP Protection	IP20
Warranty	5 Years
Certification	CE, RoHS

SKU	Power	CTT	Lumen	Dimensioni
T1501B	20W	3000K	2700lm	Ø76*L115mm
T1507B	30W	4000K	4000lm	Ø90*L125mm
T1501N	20W	3000K	2700lm	Ø76*L115mm
T1507N	30W	4000K	4000lm	Ø90*L125mm

- IP 20
- PF 0.9
- UGR ≤19

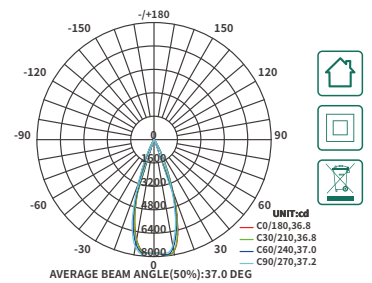

TRL001

Lumen	3100lm/3080lm/3150lm/3120lm 4200lm/4450lm/4322lm/960lm 940lm/1020lm/1000lm/1710lm 1690lm/1880lm/1860lm
Power	12W/20W/30W/40W
CCT	3000K/4000K
CRI	≥80
Angle	24°/36°/55°
UGR	≤19
Dimensions	Ø55*L110mm/Ø65*L130mm Ø83*L140mm/Ø83*L160mm
Color	White/Black
Input Voltage	220V-240V
IP Protection	IP20
Warranty	3 Years
Certification	CE, RoHS

The orange markings are clickable

BACK 



SKU	Power	CTT	Lumen	Dimensioni
T0109B	30W	3000K	3100lm	Ø83*L140mm
T0110B	30W	3000K	3080lm	Ø83*L140mm
T0111B	30W	3000K	3080lm	Ø83*L140mm
T0112B	30W	4000K	3150lm	Ø83*L140mm
T0113B	30W	4000K	3120lm	Ø83*L140mm
T0114B	30W	4000K	3120lm	Ø83*L140mm
T0115B	40W	3000K	4200lm	Ø83*L140mm
T0116B	40W	3000K	4200lm	Ø83*L140mm
T0117B	40W	3000K	4200lm	Ø83*L140mm
T0118B	40W	4000K	4450lm	Ø83*L140mm
T0119B	40W	4000K	4322lm	Ø83*L140mm
T0120B	40W	4000K	4322lm	Ø83*L140mm
T0101N	12W	3000K	960lm	Ø55*L110mm
T0102N	12W	3000K	940lm	Ø55*L110mm
T0103N	12W	4000K	1020lm	Ø55*L110mm
T0104N	12W	4000K	1000lm	Ø55*L110mm
T0105N	20W	3000K	1710lm	Ø65*L130mm
T0106N	20W	3000K	1690lm	Ø65*L130mm
T0107N	20W	4000K	1880lm	Ø65*L130mm
T0108N	20W	4000K	1860lm	Ø65*L130mm
T0109N	30W	3000K	3100lm	Ø83*L140mm
T0110N	30W	3000K	3080lm	Ø83*L140mm
T0111N	30W	3000K	3080lm	Ø83*L140mm
T0112N	30W	4000K	3150lm	Ø83*L140mm
T0113N	30W	4000K	3120lm	Ø83*L140mm

The orange markings are clickable

BACK

SKU	Power	CTT	Lumen	Dimensioni
T0114N	30W	4000K	3120lm	Ø83*L140mm
T0115N	40W	3000K	4200lm	Ø83*L160mm
T0116N	40W	3000K	4200lm	Ø83*L160mm
T0117N	40W	3000K	4200lm	Ø83*L160mm
T0118N	40W	4000K	4450lm	Ø83*L160mm
T0119N	40W	4000K	4322lm	Ø83*L160mm
T0120N	40W	4000K	4322lm	Ø83*L160mm

IP **40**
 PF **0.9**
 UGR **≤19**

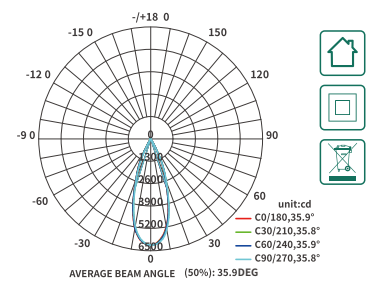

TRL003

Lumen 2560lm/2710lm/2880lm/2980lm
 Power 35W
 CCT 3000K/4000K
 CRI ≥9.0
 Angle 36°/55°
 UGR ≤19
 Dimensions Ø83*L165mm
 Color White/Black
 Input Voltage 220V-240V
 IP Protection IP40
 Warranty 5 Years
 Certification CE, RoHS

SKU	Power	CTT	Lumen	Dimensioni
T0302B	35W	3000K	2560lm	Ø83*L165mm
T0303B	35W	3000K	2710lm	Ø83*L165mm
T0305B	35W	4000K	2860lm	Ø83*L165mm
T0306B	35W	4000K	2980lm	Ø83*L165mm
T0302N	35W	3000K	2560lm	Ø83*L165mm

The orange markings are clickable

BACK ↻



TRL003






TRL004

The orange markings are clickable

BACK ↻

- IP **20**
- PF **0.9**
- UGR **≤19**

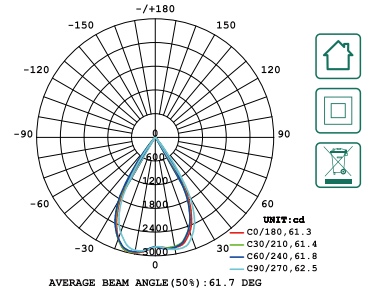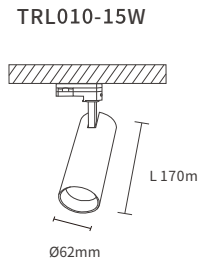

TRL010

Lumen 1320lm/1330lm/2040lm/3150lm
 3148lm/3360lm/1300lm/1310lm
 2040lm/2500lm

Power 15W/30W
 CCT 3000K/4000K
 CRI ≥90
 Angle 36°/55°
 UGR ≤19
 Dimensions Ø62*L170mm/Ø80*L180mm
 Color White/Black
 Input Voltage 220V-240V
 IP Protection IP20
 Warranty 5 Years
 Certification CE, RoHS

SKU	Power	CTT	Lumen	Dimensioni
T1002B	15W	3000K	1320lm	Ø62*L170mm
T1004B	15W	4000K	1330lm	Ø62*L170mm
T1006B	30W	3000K	2040lm	Ø80*L180mm
T1009B	30W	3000K	3150lm	Ø80*L180mm
T1010B	30W	4000K	3480lm	Ø80*L180mm
T1011B	30W	4000K	3360lm	Ø80*L180mm
T1002N	15W	3000K	1300lm	Ø62*L170mm
T1004N	15W	4000K	1310lm	Ø62*L170mm
T1006N	30W	3000K	2040lm	Ø80*L180mm
T1008N	30W	4000K	2500lm	Ø80*L180mm

The orange markings are clickable

BACK ↻



TRL010




TRL016

The orange markings are clickable

BACK ↻

IP **20**
 PF **0.9**
 UGR **≤19**


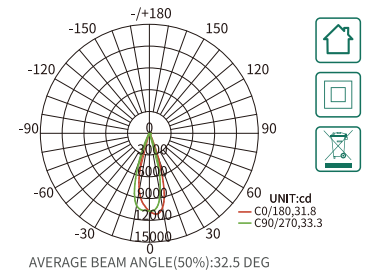


TRL016

Lumen 3300lm/3000lm
 Power 30W
 CCT 3000K/4000K
 CRI ≥ 80
 Angle 36°
 UGR ≤ 19
 Dimensions Ø80*L157mm
 Color White
 Input Voltage 220V-240V
 IP Protection IP20
 Warranty 3 Years
 Certification CE, RoHS

SKU	Power	CTT	Lumen	Dimensioni
T1601B	30W	4000K	3300lm	Ø80*L157mm
T1602B	30W	4000K	3300lm	Ø80*L157mm
T1603B	30W	3000K	3000lm	Ø80*L157mm
T1604B	30W	3000K	3000lm	Ø80*L157mm

IP **20**
 PF **0.9**
 UGR **≤19**

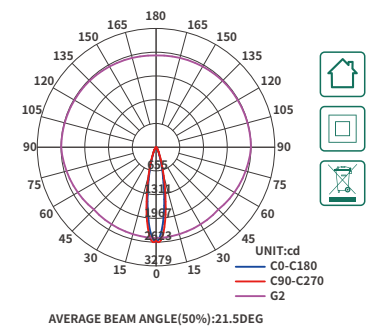

TRL008



Lumen 560lm
 Power 8W
 CCT 3000K
 CRI ≥ 80
 Angle 24°
 UGR ≤ 19
 Dimensions Ø60*L105mm
 Color White/Black
 Input Voltage 220V-240V
 IP Protection IP20
 Warranty 3 Years
 Certification CE, RoHS

The orange markings are clickable

BACK ↻

SKU	Power	CTT	Lumen	Dimensioni
T0801B	8W	3000K	560lm	Ø60*L105mm
T0802B	8W	3000K	560lm	Ø60*L105mm
T0801N	8W	3000K	560lm	Ø60*L105mm
T0802N	8W	3000K	560lm	Ø60*L105mm

- IP 20
- PF 0.9
- UGR ≤19

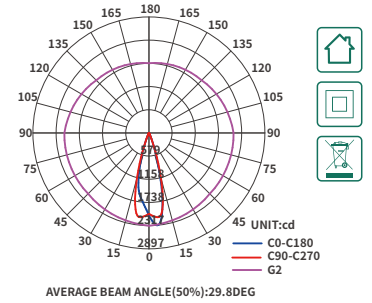

TRL009

Lumen	900lm/960lm
Power	12W
CCT	3000K/4000K
CRI	≥8 0
Angle	24°
UGR	≤ 19
Dimensions	Ø60*L130mm
Color	White/Black
Input Voltage	220V-240V
IP Protection	IP20
Warranty	3 Years
Certification	CE, RoHS

SKU	Power	CTT	Lumen	Dimensioni
T0901B	12W	3000K	900lm	Ø60*L130mm
T0902B	12W	3000K	900lm	Ø60*L130mm
T0903B	12W	4000K	960lm	Ø60*L130mm
T0905B	12W	4000K	960lm	Ø60*L130mm
T0901N	12W	3000K	900lm	Ø60*L130mm
T0902N	12W	3000K	900lm	Ø60*L130mm
T0903N	12W	4000K	960lm	Ø60*L130mm
T0905N	12W	4000K	960lm	Ø60*L130mm

The orange markings are clickable

BACK ↻



TRL008



TRL009

The orange markings are clickable

BACK ↻



TRA001

Dimensions 1000mm/2000mm/3000mm
Color White/Black






















SKU	Color	Dimensions(mm)	SKU	Color	Dimensions(mm)
AB01B	White	1000mm	AB01N	Black	1000mm
AB02B	White	2000mm	AB02N	Black	2000mm
AB03B	White	3000mm	AB03N	Black	3000mm

SKU	Foto	Spiegazione
AA01SB		Left/white power supply
AA01SN		Left/black power supply
AA01DB		Right/White power supply
AA01DN		Right/Black Power Supply
AC01B		End cap for triphase/white rail
AC01N		End cap for three-phase track/Black
AI01B		Central power supply and linear joint/White



The orange markings are clickable

BACK ↻


SKU	Foto	Spiegazione
AI01N		Mini linear joint/Black
AG01B		Mini linear joint/White
AG01N		Mini linear joint/Black
AL01SB		Left/white L joint
AL01SN		Left/black L joint
AL01DB		Right L joint/White
AL01DN		L joint right/black
AT01SB		Left T-Joint A/White
AT01SN		Left T-joint A/Black
AT02SB		Left T-Joint B/White
AT02SN		Left T-joint B/Black
AT01DB		Right T-Joint A/White.
AT01DN		Right T-joint A/Black
AT02DB		Right T-Joint B/White
AT02DN		Right T-joint B/Black
AX01B		Joint X/White
AX01N		Joint X/Black
AF01B		Movable Joint/White
AF01N		Flexible joint /Black

The orange markings are clickable

BACK ↶

SKU	Foto	Spiegazione
AM01B		Movable joint/White
AM01N		Movable joint/Black
AS01B		Suspension kit for track/3m/White
AS01N		Suspension kit for track/3m/black
AS02B		Suspension kit for track/5m/White
AD01B		Addattator with cable/2m/White
AD01N		Addattator with cable/2m/Black

- IP 20
- PF 0.9
- UGR ≤19

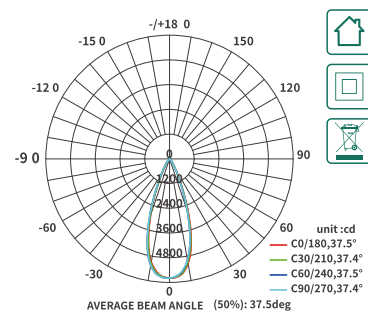

TRL002


Lumen	2420lm/2640lm/2400lm
Power	30W
CCT	3000K/4000K
CRI	≥90
Angle	36°
UGR	≤19
Dimensions	Ø83*L220mm
Color	Black/White
Input Voltage	220V-240V
IP Protection	IP20
Warranty	5 Anni
Certification	CE, RoHS



SKU	Potenza	CTT	Lumen	Dimensioni
T0202B	30W	3000K	2420lm	Ø83*L220mm
T0206B	30W	4000K	2640lm	Ø83*L220mm
T0203N	30W	3000K	2400lm	Ø83*L220mm

The orange markings are clickable

- IP 20
- PF 0.9
- UGR ≤19

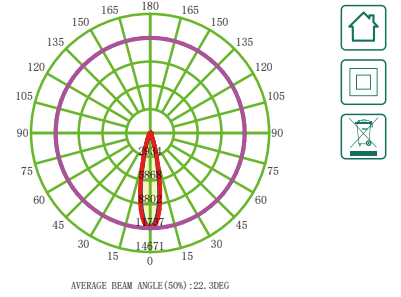

TRL005

- Lumen 2200lm/2070lm/2690lm/2740lm
- Power 28W/35W
- CCT 3000K
- CRI ≥80
- Angle 24°
- UGR ≤19
- Dimensions Ø78*L150mm/Ø100*L180mm
- Color Black/White
- Input Voltage 220V-240V
- IP Protection IP20
- Warranty 5 Anni
- Certification CE, RoHS




SKU	Potenza	CTT	Lumen	Dimensioni
T0501B	28W	3000K	2200lm	Ø78*L150mm
T0502B	28W	3000K	2070lm	Ø78*L150mm
T0503B	35W	3000K	2690lm	Ø100*L180mm
T0501N	28W	3000K	2200lm	Ø78*L150mm
T0502N	28W	3000K	2070lm	Ø78*L150mm
T0503N	35W	3000K	2690lm	Ø100*L180mm
T0504N	35W	3000K	2740lm	Ø100*L180mm

The orange markings are clickable

BACK

IP	20
PF	0.9
UGR	≤19

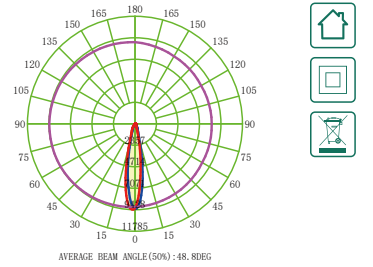


TRL006

Lumen	2650lm
Power	30W
CCT	3000K/4000K
CRI	≥80
Angle	24°
UGR	≤19
Dimensions	Φ105*L130mm
Color	Black
Input Voltage	220V-240V
IP Protection	IP20
Warranty	5 Anni
Certification	CE, RoHS



SKU	Potenza	CTT	Lumen	Dimensioni
T0601	35W	3000K	2650lm	Φ105*L130mm

IP	20
PF	0.9
UGR	≤19

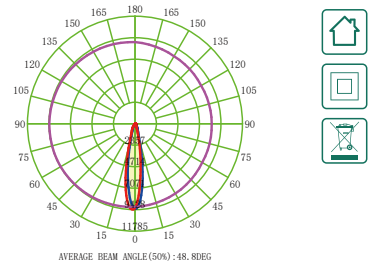

TRL007

Lumen	2650lm
Power	28W/35W
CCT	3000K
CRI	≥80
Angle	24°
UGR	≤19
Dimensions	Φ105*L130mm
Color	Black
Input Voltage	220V-240V
IP Protection	IP20
Warranty	5 Anni
Certification	CE, RoHS



SKU	Potenza	CTT	Lumen	Dimensioni
T0701	35W	3000K	2650lm	Φ105*L130mm