

Lightsource Test Report

Product Information

Product Category:

Product Number: 1

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4358$ $y=0.4012$ $u(u')=0.2510$ $v=0.3467$ $v'=0.5201$

CCT: $T_c=2997K$ ($duv=-0.00098$)

Color Ratio: $R=0.229$ $G=0.750$ $B=0.021$

Peak Wavelength: 606.1nm

Half Bandwidth: 132.9nm

Dominant Wavelength: 583.2nm

Color Purity: 0.512

CRI: $R_a=81.4$


$R1=80$ $R2=88$ $R3=95$ $R4=81$ $R5=80$ $R6=85$ $R7=83$ $R8=60$

$R9=8$ $R10=72$ $R11=80$ $R12=65$ $R13=82$ $R14=97$ $R15=74$

Color Quality Scale: $Q_a=80.5$, $Q_f=81.2$, $Q_p=83.6$, $Q_g=94.1$

$Q1=77$ $Q2=97$ $Q3=78$ $Q4=77$ $Q5=81$ $Q6=80$ $Q7=80$ $Q8=84$

$Q9=96$ $Q10=86$ $Q11=83$ $Q12=82$ $Q13=82$ $Q14=72$ $Q15=73$

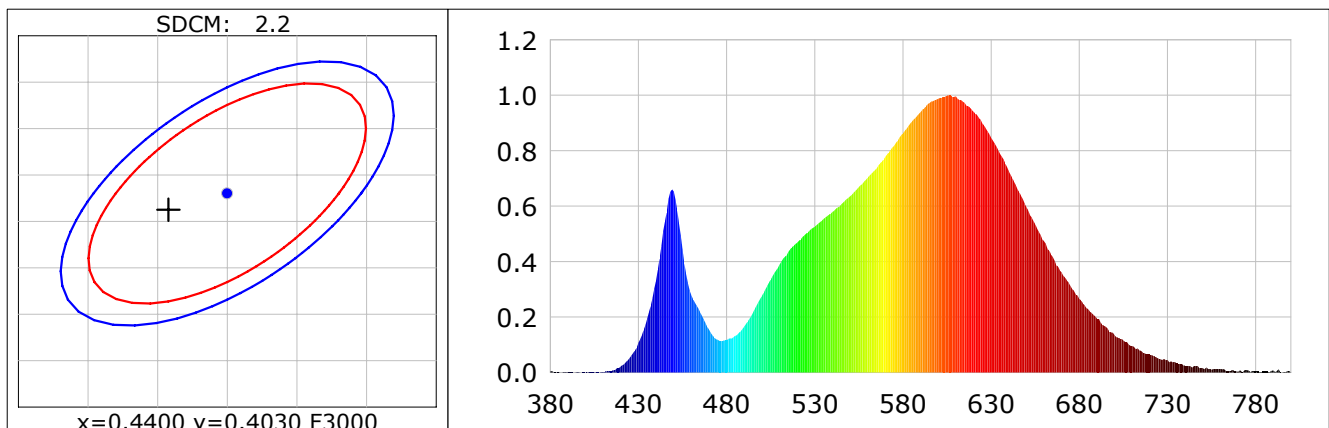

Photometric Parameters

Luminous Flux: 5051.58 lm
EEI: 0.11

Efficiency: 126.23 lm/W

Radiant Power: 15.134 W

Energy Efficiency Class: A++ (EU 874-2012)

Electric Parameters

Voltage: 219.60V

Current: 0.1860A

Power: 40.02W

Power Factor: 0.9760

Frequency: 50.00Hz

BIN: OUT :

Test Information

Scan Range: 380~800:1nm

Stabilization Time: 0 Sec

Max of Signal: 42007 (4438)

Photometric Method: sphere-spectroradiometer

Photometric Condition: Sphere diameter: 2.00m, 4 π

CCD Integration Time: 285.64 ms

Condition: $T_x=34.3^\circ C$, $T_i=31.2^\circ C$, R.H.:60%

Test Lab: IDEUS

Operator:

Test Device: Inventfine CMS-3000S

Test Time: 2020-06-02 16:57:59

Inspector: