

LINEAR LIGHTS


SPECIFICITY

- Geometric line design.
- Aluminum.
- Different color and brightness temperatures available
- Pendant or chandelier shape
- Innovative designs to create unique and eye-catching lighting fixtures.

Illumination of commercial spaces

LED LINEAR LAMP


○ SLL001-A

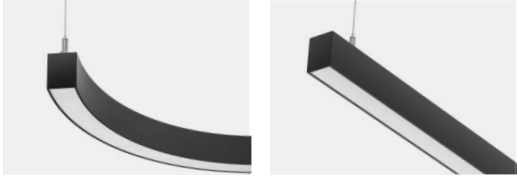

○ SLL002-A




○ SLL003-A

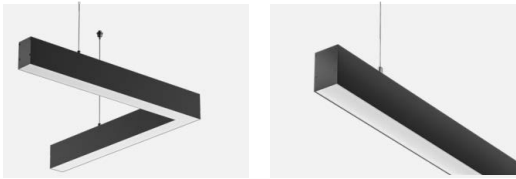


○ SLL004-A



○ MLL002-A

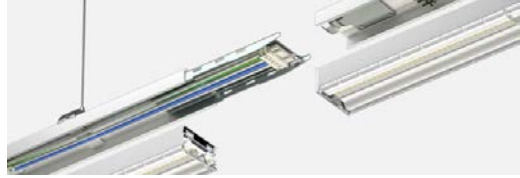

○ MLL003-A

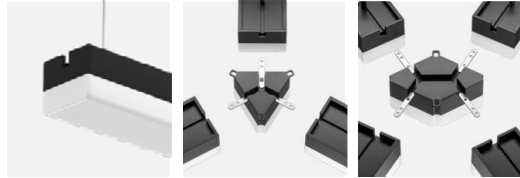

○ MLL004-A







KOSOON®

It is particularly suitable for indoor and outdoor entertainment venues, building contour design, and billboard production.

The orange markings are clickable

BACK

- IP 20
- PF 0.9
- UGR ≤26

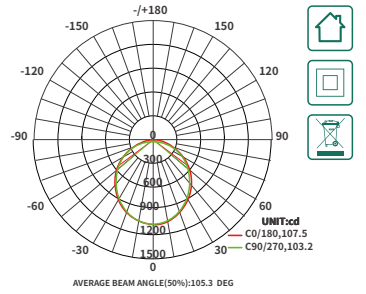
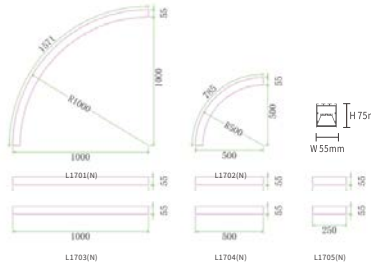


SLL001-A

Lumen 750lm/1320lm/2080lm
2760lm/4890lm
Power 7.5W/15W/24W/30W/48W
CCT 4000K
CRI ≥80
Angle 110°
UGR ≤26
Dimensions 1000*55*75mm/500*55*75mm
250*55*75mm
Color Black
Input Voltage 220V-240V
IP Protection IP20
Warranty 3 Years
Certification CE, RoHS

SKU	Power	CTT	Lumen	Dimensioni
L1701N	48W	4000K	4890lm	1000*55*75mm
L1702N	24W	4000K	2080lm	500*55*75mm
L1703N	30W	4000K	2760lm	1000*55*75mm
L1704N	15W	4000K	1320lm	500*55*75mm
L1705N	7.5W	4000K	750lm	250*55*75mm

- IP 20
- PF 0.9
- UGR ≤27

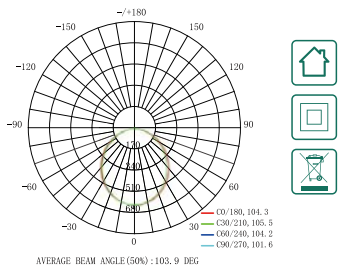

SLL002-A

Lumen 2100lm/2120lm
Power 20W
CCT 4000K
CRI ≥80
Angle 110°
UGR ≤27
Dimensions L1150*W60*H85mm
Color Black
Input Voltage 220V-240V
IP Protection IP20
Warranty 3 Years
Certification CE, RoHS

The orange markings are clickable

BACK ↶



SLL001-A





SLL002-A

The orange markings are clickable

BACK

SKU	Power	CTT	Lumen	Dimensioni
L1301N	20W	4000K	750lm	1000*55*75mm
L1302N	20W	4000K	1320lm	500*55*75mm

- IP 40
- PF 0.9
- UGR ≤29

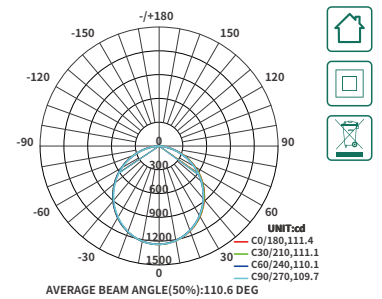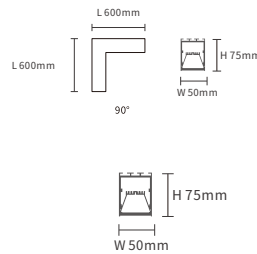

SLL003-A

- Lumen 4300lm/5000lm/4700lm
- Power 40W
- CCT 3000K/4000K
- CRI ≥80
- Angle 110°
- UGR ≤29
- Dimensions L1200*W50*H75mm
(L600+L600) *W50*H75mm
- Color White/Black
- Input Voltage 220V-240V
- IP Protection IP40
- Warranty 3 Years
- Certification CE, RoHS

SKU	Power	CTT	Lumen	Dimensioni
L0201B	40W	3000K	4300lm	L1200*W50*H75mm
L0202B	40W	4000K	5000lm	L1200*W50*H75mm
L0201N	40W	3000K	4300lm	L1200*W50*H75mm
L0202N	40W	4000K	4700lm	L1200*W50*H75mm
L0211B	40W	4000K	5000lm	(L600+L600) *W50*H75mm
L0211N	40W	4000K	4700lm	(L600+L600) *W50*H75mm

The orange markings are clickable

BACK ↶



SLL003-A



SLL004-A




The orange markings are clickable

BACK ↶

IP 20

PF 0.9

UGR ≤19

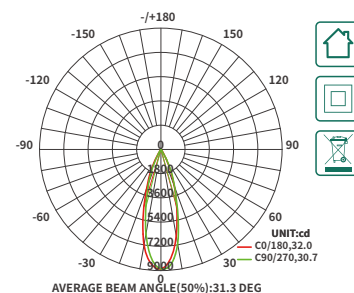

SLL004-A

Lumen 2900lm/3000lm
 Power 40W
 CCT 3000K/4000K
 CRI ≥80
 Angle 34°
 UGR ≤19
 Dimensions L1200*W38*H64mm
 Color White
 Input Voltage 220V-240V
 IP Protection IP20
 Warranty 3 Years
 Certification CE, RoHS

SKU	Power	CTT	Lumen	Dimensioni
L1601	40W	3000K	2900lm	L1200*W38*H64mm
L1602	40W	4000K	3000lm	L1200*W38*H64mm

IP 40

PF 0.9

UGR ≤30




Modalità di connessione



Modalità di installazione



MLL002-A

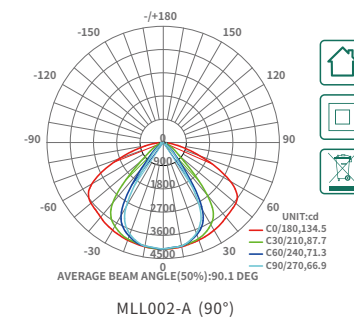

MLL002-A

Lumen 7800lm
 Power 50W
 CCT 4000K/5000K
 CRI ≥80
 Angle 90°
 UGR ≤30
 Dimensions L1420*W68*H62mm
 Color White/Black
 Input Voltage 220V-240V
 IP Protection IP40
 Warranty 3 Years
 Certification CE, RoHS

The orange markings are clickable

BACK ↶



MLL002-A



MLL003-A

The orange markings are clickable

BACK ↶

SKU	Power	CTT	Lumen	Dimensioni
L0107B	50W	4000K	7800lm	L1420*W68*H62mm
L0110B	50W	5000K	7800lm	L1420*W68*H62mm

Conduita 5wires "A"



5-wire trunking "B"



5-wire power supply



Three-phase track module



Emergency module with battery



Coverage



End cap



Suspension cable 3 meters







Suspension cable 5 meters



Accessory kit for ceiling installation



- IP 20
- PF 0.9
- UGR ≤19

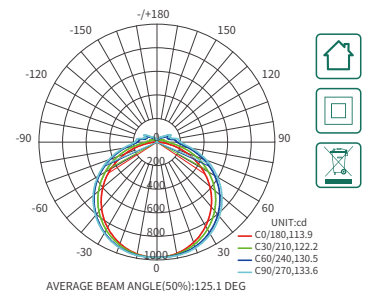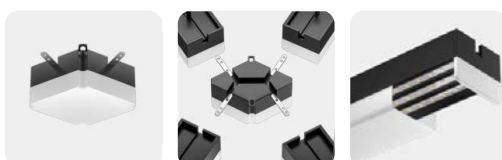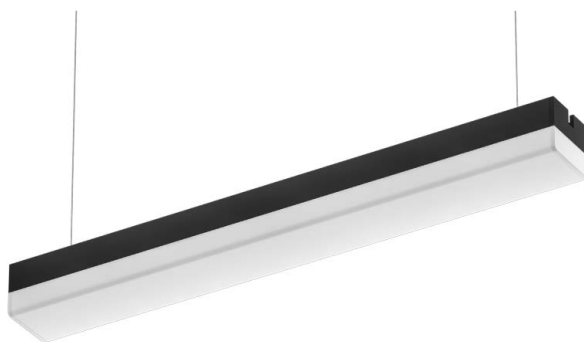

MLL003-A

Lumen	3800lm/4013lm/3690lm/4000lm 270lm/265lm/280lm/275lm/365lm 320lm/400lm/360lm/4800lm/4960lm 355lm/350lm/415lm/400lm/590lm 580lm/630lm/580lm
Power	3W/4W/6W/40W/50W
CCT	3000K/4000K
CRI	≥80
Angle	120°/130°
UGR	≤30
Dimensions	1200*70*60mm/70*70mm 1200*100*60mm/100*100mm
Color	White/Black
Input Voltage	220V-240V
IP Protection	IP20
Warranty	3 Years
Certification	CE, RoHS




The orange markings are clickable

SKU	Power	CTT	Lumen	Dimensioni
L0301B	40W	3000K	3800lm	1200mm*70mm*60mm
L0302B	40W	4000K	4013lm	1200mm*70mm*60mm
L0301N	40W	3000K	3690lm	1200mm*70mm*60mm
L0302N	40W	4000K	4000lm	1200mm*70mm*60mm
L0303B	3W	3000K	270lm	70*70mm
L0303N	3W	3000K	265lm	70*70mm
L0304B	3W	4000K	280lm	70*70mm
L0304N	3W	4000K	275lm	70*70mm
L0305B	4W	3000K	365lm	70*70mm
L0305N	4W	3000K	320lm	70*70mm
L0306B	4W	4000K	400lm	70*70mm
L0306N	4W	4000K	360lm	70*70mm
L0307B	50W	3000K	4800lm	1200mm*100mm*60mm
L0308B	50W	4000K	4960lm	1200mm*100mm*60mm
L0307N	50W	3000K	4800lm	1200mm*100mm*60mm
L0308N	50W	4000K	4960lm	1200mm*100mm*60mm
L0309B	4W	3000K	355lm	100*100mm
L0309N	4W	3000K	350lm	100*100mm
L0310B	4W	4000K	415lm	100*100mm
L0310N	4W	4000K	400lm	100*100mm
L0311B	6W	3000K	590lm	100*100mm
L0311N	6W	3000K	580lm	100*100mm
L0312B	6W	4000K	630lm	100*100mm
L0312N	6W	4000K	580lm	100*100mm

The orange markings are clickable

BACK

- IP 20
- PF 0.9
- UGR ≤30

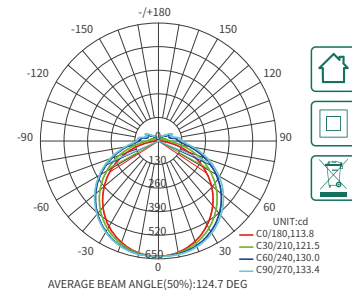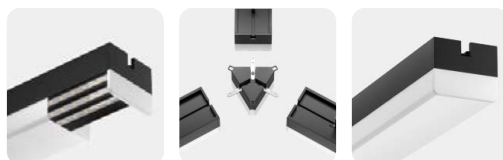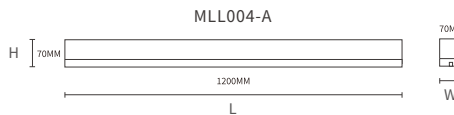

MLL004-A

- Lumen 1840lm/3900lm/1620lm/3600lm
- Power 15W/30W
- CCT 4000K
- CRI ≥80
- Angle 120°
- UGR ≤30
- Dimensions 600mm*70mm*60mm
1200mm*70mm*60mm
- Color White/Black
- Input Voltage 220V-240V
- IP Protection IP20
- Warranty 3 Years
- Certification CE, RoHS

SKU	Power	CTT	Lumen	Dimensioni
L0405B	15W	4000K	1840lm	600mm*70mm*60mm
L0403B	30W	4000K	3900lm	1200mm*70mm*60mm
L0405N	15W	4000K	1620lm	600mm*70mm*60mm
L0403N	30W	4000K	3600lm	1200mm*70mm*60mm

Suspended cable installation kit



LA0301

Accessory kit for ceiling installation at 70mm open slats



LA0302

Accessory kit for ceiling installation at 100mm open slats



LA0303

Accessory kit for 70mm ceiling installation



LA0304

Accessory kit for 70mm ceiling installation




LA0305

The orange markings are clickable

BACK ↶



MLL004-A

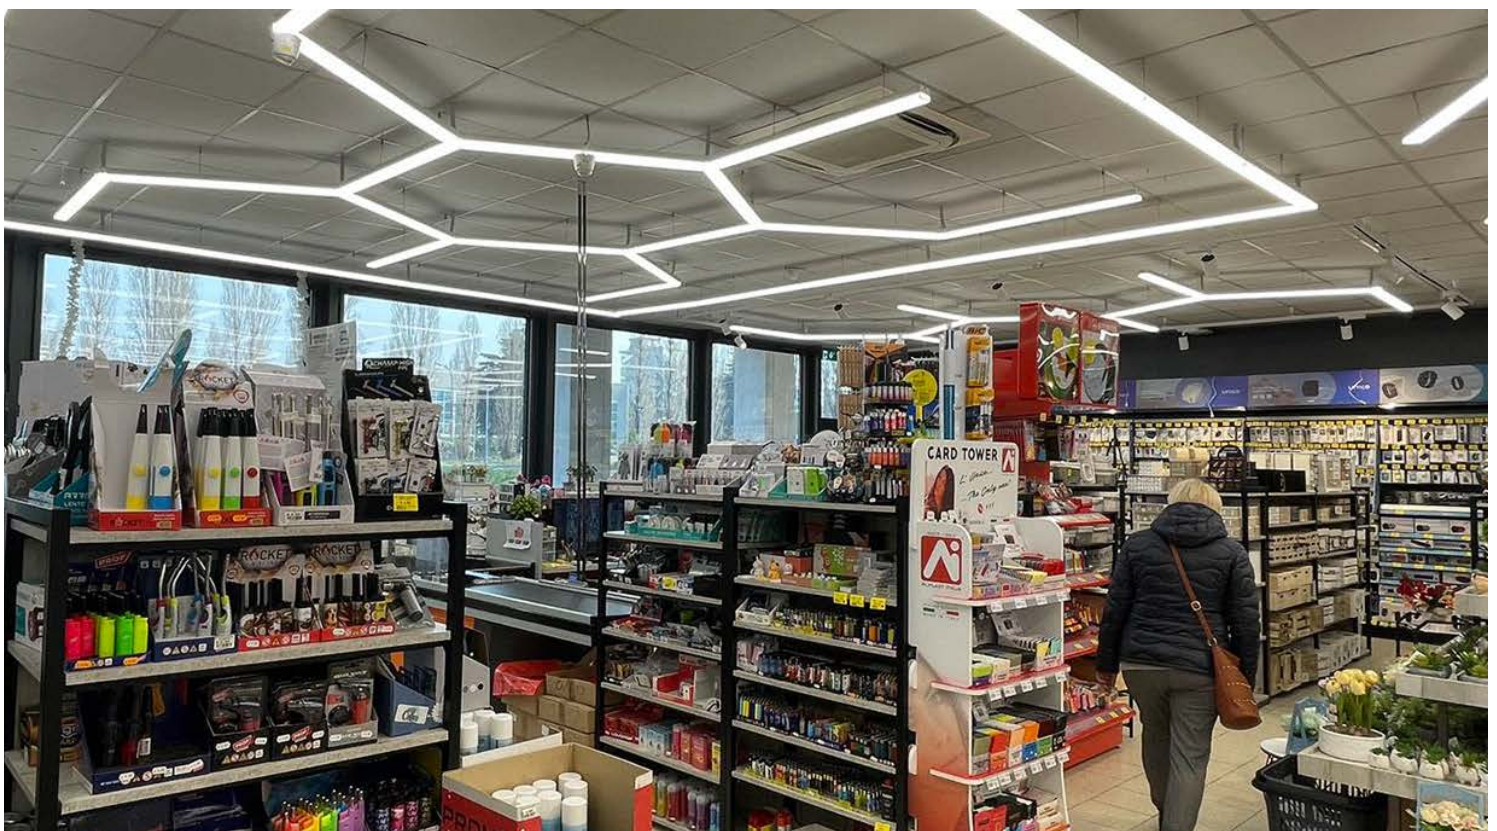

MLL004-A