


LED PANEL LIGHT

SPECIFICATIONS

- Thin design, the overall structure is lighter and thinner
- High brightness, no flicker, softer and more uniform light source
- LED light source is energy-saving and environmentally friendly, with long lighting life
- Easy to install, three installation methods: embedded, hanging wire, integrated, adapt to different

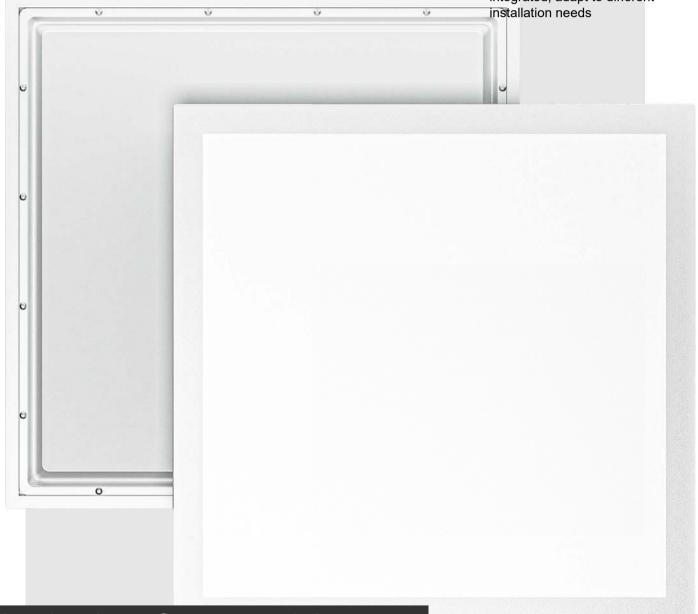

Illumination of commercial spaces







The orange markings are clickable





40W

PB0112



3800lm




LED Panel Light

Luillells	13900111/40001111/42001111		
	3680lm/3800lm		
Power	40W		
PF	0.9		
CCT	3000K/4000K/6000K		
CRI	≥8 0		
Corner	110°		
UGR	≤ 19		
Dimensions	595x595x26mm		
Color	White		
Input Voltage	220-240V		
IP protection	IP20		
Warranty	3 years		
Certification	CE, RoHS		



6000K

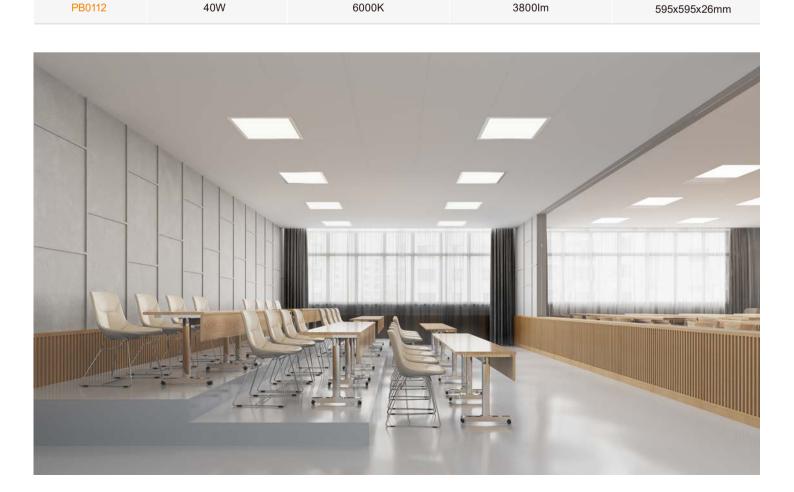




The orange markings are clickable

K0500M®











Lumens	2950lm/3575lm
Power	25W
PF	0.9
CCT	4000K/6000K
CRI	≥8 0
Corner	110°
UGR	≤ 19
Dimensions	595x595x26mm
Color	White
Input Voltage	220-240V
IP protection	IP20
Warranty	3 years
Certification	CE, RoHS











SKU	Power	стт	Lumen	Dimensions
PB0202	25W	4000K	2950lm	595x595x26mm
PB0210	25W	4000K	3575lm	595x595x26mm
PB0212	25W	6000K	3575lm	595x595x26mm