

# SURFACE DOWNLIGHT

## SPECIFICITY

- Directly illuminates light downwards, providing bright and concentrated lighting effects, suitable for the lighting needs of specific areas.
- The installation is simple and can be installed directly on the ceiling without the need for an independent support structure, thus saving indoor space.
- High light efficiency, low energy consumption



Illumination of commercial spaces

**SURFACE-MOUNTED DOWNLIGHT**



CSL001-S



CSL002-S





KOSOON®

Surface-mounted downlights are often used in commercial places, such as shops, restaurants, exhibition halls, etc., which can provide good lighting effects and help create a commercial atmosphere.

The orange markings are clickable

BACK ↶

- IP 20
- PF 0.9
- UGR ≤22-≤28

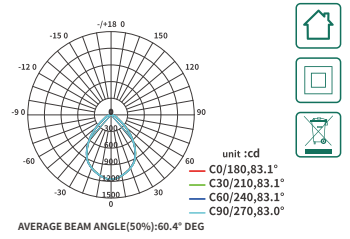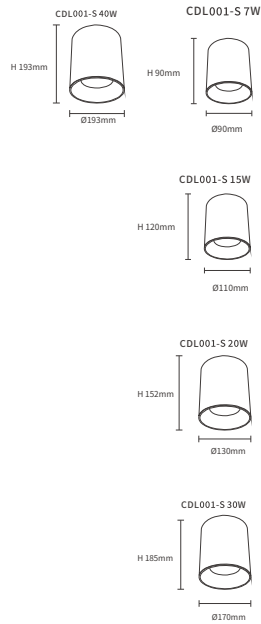

### CDL001-S

Lumen 480lm/510lm/1200lm/1250lm  
1760lm/1780lm/2100lm/2250lm  
2960lm/2980lm

Power 7W/15W/20W/30W/40W

PF 0.9

CCT 3000K / 4000K

CRI ≥90

Angle 60°

UGR ≤22

Dimensions Φ90\*H90mm/Φ110\*H120mm  
Φ130\*H152mm/Φ170\*H185mm  
Φ193\*H193mm

Color White

Input Voltage 220V-240V

IP Protection IP20

Warranty 3 Years

Certification CE, RoHS



SKU	Power	CTT	Lumen	Dimensioni
D1001	7W	3000K	480lm	Φ90*H90mm
D1002	7W	4000K	510lm	Φ90*H90mm
D1003	15W	3000K	1200lm	Φ110*H120mm
D1004	15W	4000K	1250lm	Φ110*H120mm
D1005	20W	3000K	1760lm	Φ130*H152mm
D1006	20W	4000K	1780lm	Φ130*H152mm
D1007	30W	3000K	2100lm	Φ170*H185mm
D1008	30W	4000K	2250lm	Φ170*H185mm
D1009	40W	3000K	2960lm	Φ193*H193mm
D1010	40W	4000K	2980lm	Φ193*H193mm



The orange markings are clickable

BACK 



**CDL001-S**





**CDL002-S**

The orange markings are clickable

BACK ↻

- IP **20**
- PF **0.9**
- UGR **≤22-≤24**

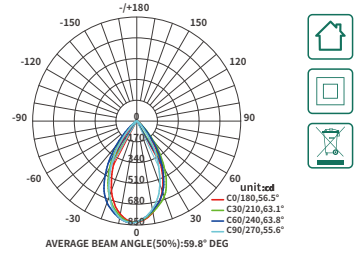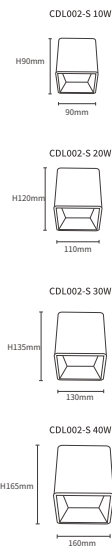

### CDL002-S

**Lumen** 830lm/850lm/1760lm/1780lm  
 2300lm/2320lm/3830lm/3860lm  
**Power** 10W/20W/30W/40W  
**PF** 0.9  
**CCT** 3000K / 4000K  
**CRI** ≥90  
**Angle** 60°  
**UGR** ≤24/≤23  
**Dimensions** 90\*H90mm/110\*H120mm  
 130\*H135mm/160\*H165mm  
**Color** White  
**Input Voltage** 220V-240V  
**IP Protection** IP20  
**Warranty** 3 Years  
**Certification** CE, RoHS



SKU	Power	CTT	Lumen	Dimensioni
D1101	10W	3000K	830lm	90*H90mm
D1102	10W	4000K	850lm	90*H90mm
D1103	20W	3000K	1760lm	110*H120mm
D1104	20W	4000K	1780lm	110*H120mm
D1105	30W	3000K	2300lm	130*H135mm
D1106	30W	4000K	2320lm	130*H135mm
D1107	40W	3000K	3830lm	160*H165mm
D1108	40W	4000K	3860lm	160*H165mm